

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 14, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11-8-1989 found a 2 1/2" galvanized iron pipe with pipe cap; also remains of 1920 White Pine stump with scribe visible
DATE
 - left monument as found, lowered monument, removed monument (explain)
- On 5-10-1990 placed a stamped the cap on existing pipe as shown below
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

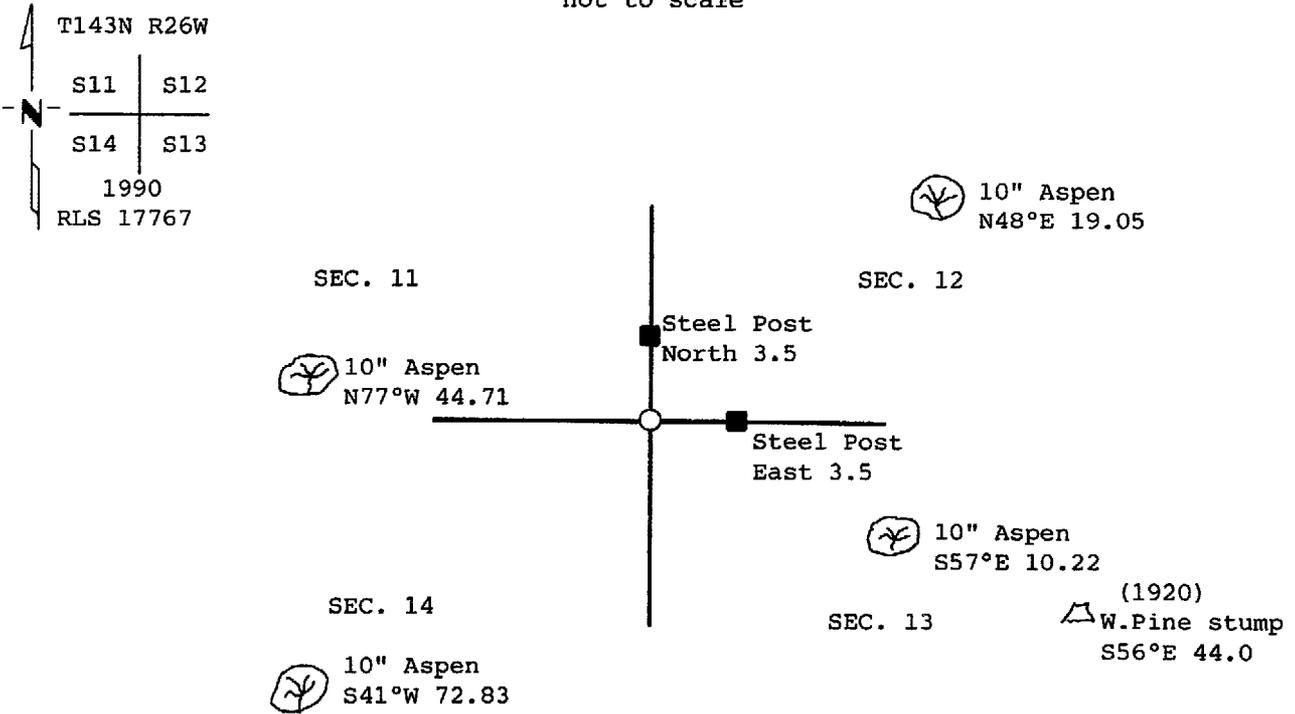

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

323156

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Danson

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:15 P. M. on the 28 day of August A.D., 19 90

County Recorder Claudine Korgun

By ms, Deputy

DOCUMENT NO. 323156

Statement of Evidence:

J21 Northeast corner section 14

Cor. 11,12,13 and 14 (NE Cor. Sec. 14)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
W. Pine 7" N 26 degrees E, 12 Links (7.92 feet)
W. Pine 5" S 25 degrees W, 10 Links (6.60 feet)
N. Pine 8" N 65 degrees W, 25 Links (16.50 feet)
N. Pine 8" S 35 degrees E, 30 Links (19.80 feet)
- 1916 J.H. Flynn, Cass County Surveyor, Survey Record No. 413, states corner in place, no mention of BT's.
- 1920 J.H. Flynn, Cass County survey notes for Town of Salem road No. 5 state, chained on random line, at 5250 hub, then N 87 degrees W, 94 feet to corner, found stumps of original witness trees as on record, add the following new witnesses:
Aspen 8" N 42 1/2 degrees E, 81.5 feet
W. Pine stub 12" N 60 1/2 degrees W, 72 feet
W. Pine stump 12" S 56 degrees E, 44 feet
W. Pine stump 16" S 48 degrees W, 39 feet
- 1964 Morrison and Morgan, USFS, corner card states found approximate corner tag on old woods road 1 chain west of corner, blue line painted N and E, no brass cap or BT's, set approximate corner tag on 8" Balm of Gilead.
- 1969 Curt Krause, USFS, chained to search area from quarter corner to east, area has been logged and heavily burned, no evidence of corner, or BT's found.
- 11-8-1989 Personnel from Kovanen & Osufsen Inc. search area determined by traverse, no original BT's were found, find old 2.5" galvanized iron pipe and badly rotted W. Pine stump S 56 degrees E, 44 feet from pipe, scribe mark S 13 visible and 6d nail in face of blaze, believe this pipe is from 1920 survey which is a perpetuation of original corner position.
- 5-10-1990 Personnel from Kovanen & Osufsen Inc. stamped cap on found 2.5" iron pipe and established the following witnesses:
Aspen 10" S 41 degrees W, 72.83 feet
Aspen 10" N 77 degrees W, 44.71 feet
Aspen 10" N 48 degrees E, 19.05 feet
Aspen 10" S 57 degrees E, 10.22 feet
Set 8' steel sign post with sign , East, 3.5 feet
Set 8' steel sign post with sign , North, 3.5 feet

This position is traceable to the original GLO corner.