

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 21, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-9-1990 placed a 2" X 54" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

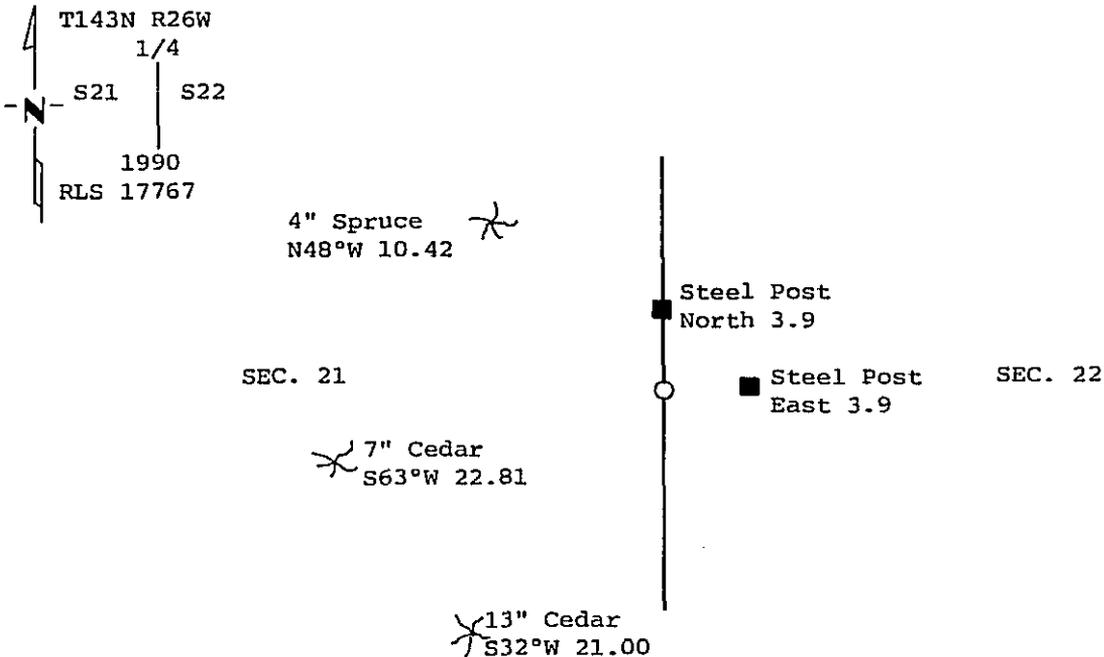

bearings are true All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

323160

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Dasher

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:19 P. .M. on the 28 day of August A.D., 19 90

County Recorder Claudia Kayler

By WJ, Deputy

DOCUMENT NO. 323160

Statement of Evidence:

P13 East quarter corner section 21

1/4 Cor. 21 and 22 (N 1/4 Cor. Sec. 21)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Cedar 5" S 78 degrees E, 15 Links (9.90 feet)
Tamarack 5" N 63 degrees W, 5 Links (3.30 feet)
- 9-16-1968 Curt Krause, USFS, searched area, has been cut over, no evidence of corner or BT's found.
- 11-15-1989 Personnel from Kovanen & Osufsen Inc., search area is in old clearcut, 2" poplar growth, no evidence of corner found.
- 4-19-1990 Personnel from Kovanen & Osufsen Inc. traverse to area and made an additional search, no evidence found.
- 5-9-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument by single proportion method between found Northeast corner of section 21 and reestablished Southeast corner of section 21 and established the following witnesses:
Cedar 13" S 32 degrees W, 21.00 feet
Cedar 7" S 63 degrees W, 22.81 feet
Spruce 4" N 48 degrees W, 10.42 feet
Set 8' steel sign post with sign attached, East 3.9 feet
Set 8' steel sign post with sign attached, North 3.9 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.