

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 28, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4-18-90 placed a 2" X 54" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

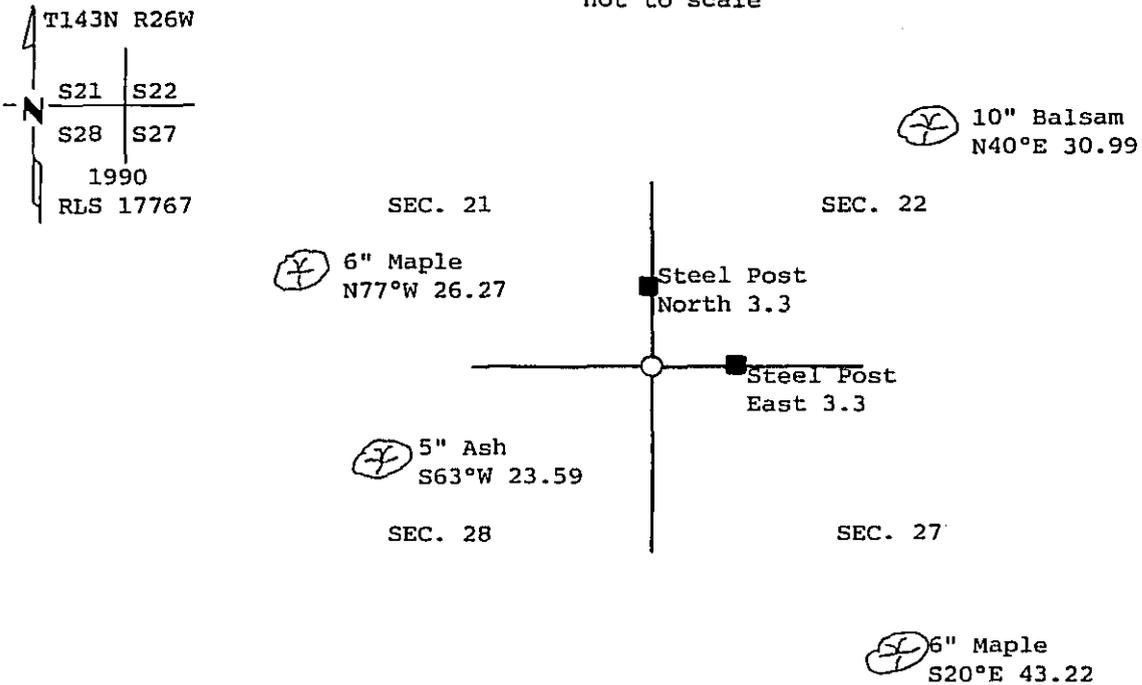

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 323163

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osburn

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:22 P.M. on the 28 day of August A.D., 1990

County Recorder Clodine Kayler

By MS, Deputy

DOCUMENT NO. 323163

Statement of Evidence:

R13 Northeast corner section 28

Cor. 21,22,27 and 28 (NE Cor. Sec. 28)

1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Spruce 18" N 6 degrees E, 30 Links (19.80 feet)
Spruce 10" S 70 degrees W, 60 Links (39.60 feet)
Birch 16" N 55 degrees W, 20 Links (13.20 feet)
Cedar 6" S 65 degrees E, 38 Links (25.08 feet)

11-15-1989 Personnel from Kovanen & Osufsen Inc. chain to area from section corner to north, no evidence of corner or BT's found.

4-18-1990 Personnel from Kovanen & Osufsen Inc. made an additional search of area, nothing found, set a 2" x 54" brass capped monument in lost position by double proportion method using found Northwest corner of Section 28, North Quarter corner of Section 27, Northeast corner of Section 21 and the reestablished Southeast corner of Section 28, mark the following witnesses:
Ash 5" S 63 degrees W, 23.59 feet
Maple 6" N 77 degrees W, 26.27 feet
Balsam 10" N 40 degrees E, 30.99 feet
Maple 6" S 20 degrees E, 43.22 feet
Set 8' long steel sign post with sign attached, East 3.3 feet
Set 8' long steel sign post with sign attached, North 3.3 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.