

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 27, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
- DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4-10-90 placed a 2" X 54" brass capped monument
- DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

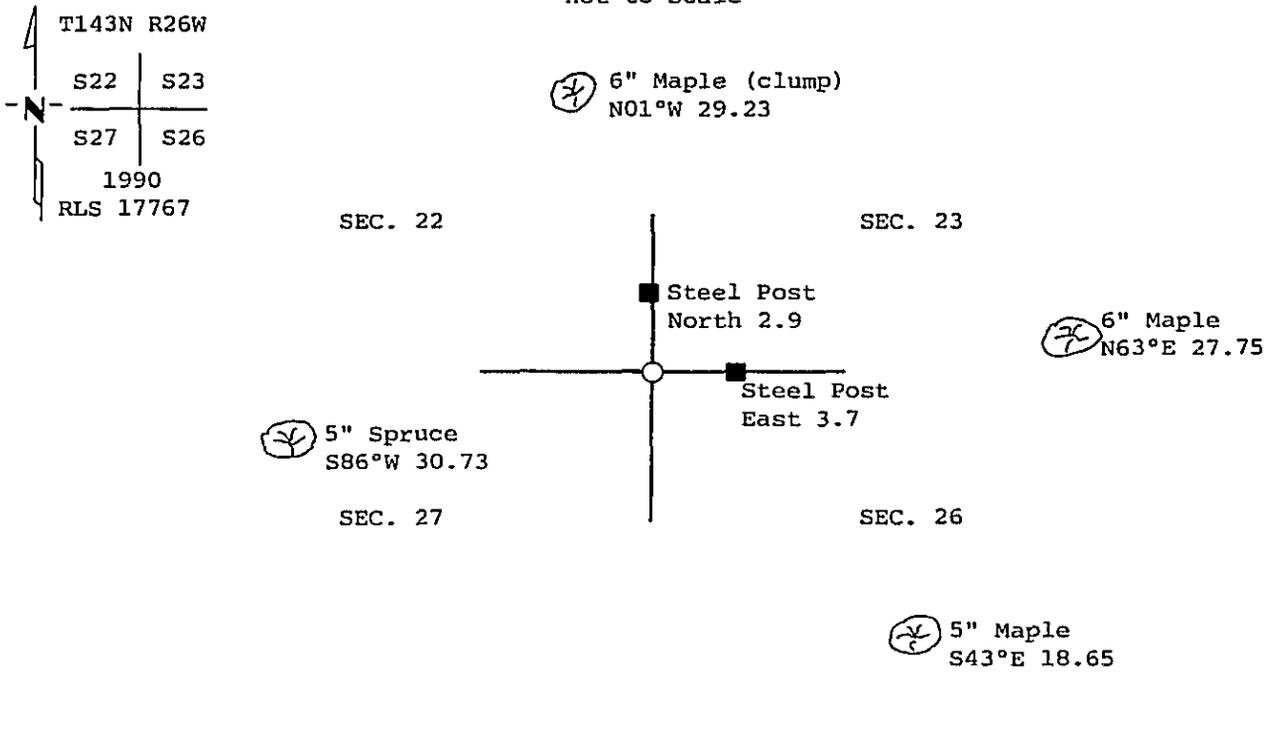

All trees are scribed, painted with a 30d bearings are true spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 323164

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Clasper

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:23 P.M. on the 28 day of August A.D., 19 90

County Recorder Claudia Kayler
By M.S., Deputy

DOCUMENT NO. 323164

Statement of Evidence:

R17 Northeast corner section 27

Cor. 22,23,26 and 27 (NE Cor. Sec. 27)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Birch 8" N 41 degrees E, 10 Links (6.60 feet)
Birch 7" S 20 degrees W, 30 Links (19.80 feet)
Fir 10" N 76 degrees W, 10 Links (6.60 feet)
Maple 6" S 39 degrees E, 21 Links (13.86 feet)
- 10-22-1968 Curt Krause, USFS, searched area, no evidence of corner, or BT's found.
- 11-9-1989 Personnel from Kovanen & Osufsen Inc. traverse to search area, no evidence of corner or BT's found.
- 4-10-1990 Personnel from Kovanen & Osufsen Inc. made an additional search of area, nothing found, set a 2" x 54" brass capped monument in lost position by double proportion method using found North Quarter corner of Section 27, Northeast corner of Section 25 and the reestablished Northeast corner of Section 22 and the reestablished Southeast corner of Section 27, mark the following witnesses:
Spruce 5" S 86 degrees W, 30.73 feet
Maple 6" N 01 degrees W, 29.23 feet
Maple 6" N 63 degrees E, 27.75 feet
Maple 5" S 43 degrees E, 18.65 feet
Set 8' long steel sign post with sign attached, East 3.7 feet
Set 8' long steel sign post with sign attached, North 2.9 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.