

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 26, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-8-1990 placed a 2" X 54" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

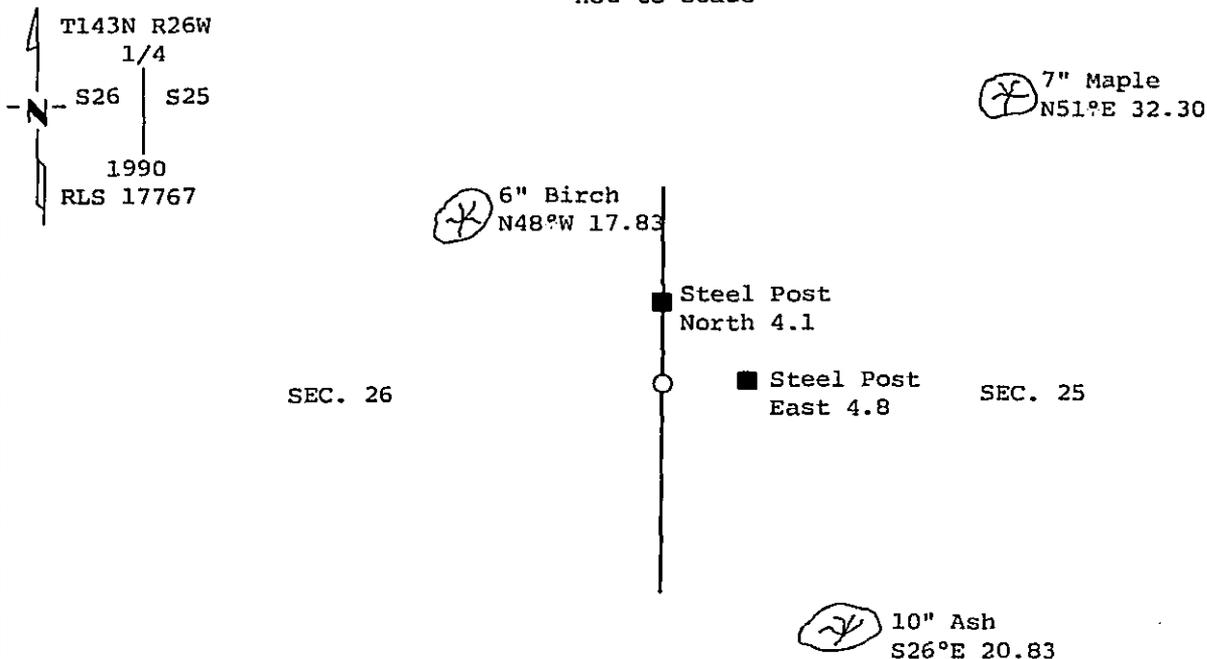

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.
bearings are true

Statement of evidence relative to this corner location is on back of page. 323168

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osborn

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:27 P. .M. on the 28 day of August A.D., 1990

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 323168

Statement of Evidence:

T21 East quarter corner section 26

1/4 Cor. 25 and 26 (N 1/4 Cor. Sec. 26)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Maple 4" S 49 degrees W, 6 Links (3.96 feet)
Maple 4" N 70 degrees E, 8 Links (5.28 feet)
- 1968 Curt Krause, USFS, chained to search area from section corner to south, no evidence of corner or BT's found.
- 11-10-1989 Personnel from Kovanen & Osufsen Inc. traversed to search area, no evidence of corner or BT's found.
- 5-8-1990 Personnel from Kovanen & Osufsen Inc. made an additional search of area and set a 2" x 54" brass capped monument by single proportion measurement on line, between the found Southeast corner of Section 26 and the reestablished Northeast corner of Section 26, then witnessed as follows:
Ash 10" S 26 degrees E, 20.83 feet
Maple 7" N 51 degrees E, 32.30 feet
Birch 6" N 48 degrees W, 17.83 feet
Set 8' steel sign post with sign attached, East 4.8 feet
Set 8' steel sign post with sign attached, North 4.1 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.