

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 33, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-1-90 placed a 2 inch x 48 inch Brass capped monument
DATE

Monument marked

SKETCH OF REFERENCE TIES
 Not to scale

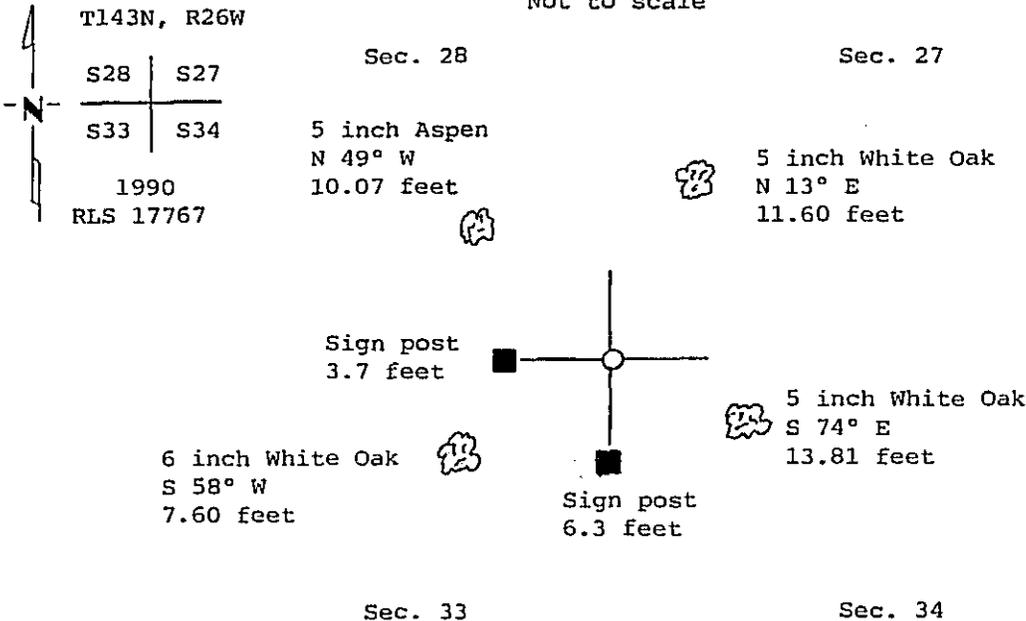

All bearings true

All trees are scribed, painted with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325148

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Carpe

Date 11/19/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:02 P. M. on the 21 day of November A.D., 19 90

County Recorder Claudia Kayler

By me, Deputy

DOCUMENT NO. 325148

Statement of Evidence:

V13 Northeast corner section 33

Cor. 27,28,33 and 34 (NE Cor. Sec. 33)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Birch 10" N 22 degrees E, 20 Links (13.20 feet)
Maple 5" S 57 degrees W, 40 Links (26.40 feet)
Maple 6" N 77 degrees W, 20 Links (13.20 feet)
W. Pine 24" S 52 degrees E, 35 Links (23.10 feet)
- 1-21-1916 E.B. Horst, Cass County Deputy Surveyor, notes on file in Cass County Surveyors office, indicate corner.
- 7-1916 J.H. Flynn, Cass County Surveyor, Survey Record No. 409, Page 160, states found the following witness:
W. Pine stump 26" S 52 degrees E, 35 Links
he adds the following witnesses:
Balm of Gilead 7" S 9 degrees E, 45.3 feet
Fir 8" S 25 degrees 30 minutes W, 47.9 feet
- 9-5-1968 Curt Krause, USFS, chained to area from south, area has been logged and burned, no evidence of corner, or BT's found.
- 11-15-1989 Personnel from Kovanen & Osufsen Inc. chained to area from quarter corner to west, find fence corner, posts rotted away, wire runs north and west, no evidence of BT's.
- 10-1-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 48" brass capped monument in reestablished position at the westerly extension of old road and intersection of north-south fence line. The following witnesses were established:
W. Oak 5" N 13 degrees E, 11.60 feet
Aspen 5" N 49 degrees W, 10.07 feet
W. Oak 6" S 58 degrees W, 7.60 feet
W. Oak 5" S 74 degrees E, 13.81 feet
Set 8' long steel sign post with sign attached, West 3.7 feet
Set 8' long steel sign post with sign attached, South 6.3 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.