

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 34, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On _____ found a _____
DATE


left monument as found, lowered monument, removed monument (explain)

On 6/25/90 placed a 2 inch x 54 inch Brass capped monument
DATE

Monument marked

SKETCH OF REFERENCE TIES

Not to scale

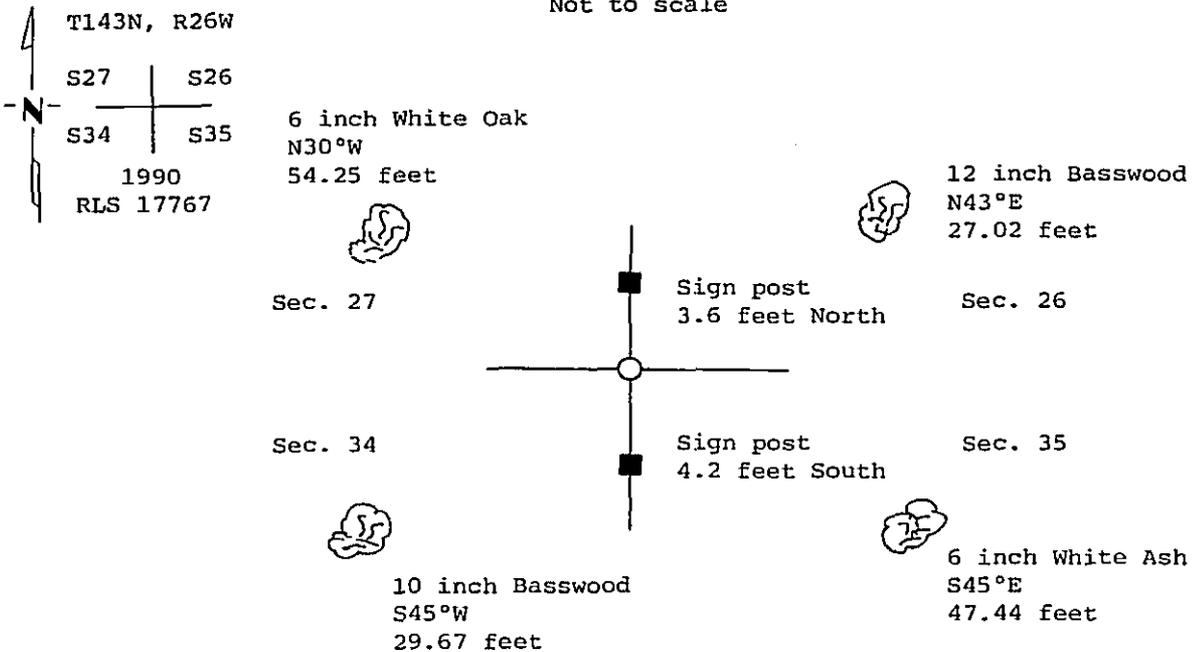

All bearings true

All trees are scribed, painted, with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325150

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Orsow
Date 11/14/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:24 P. .M. on the 21 day of November A.D., 1990

County Recorder Claudine Kayler

By M.S., Deputy

DOCUMENT NO. 325150

Statement of Evidence:

V17 Northeast corner section 34

Cor. 26,27,34 and 35 (NE Cor. Sec. 34)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
W. Pine 4" N 52 degrees E, 8 Links (5.28 feet)
Ash 5" S 18 degrees W, 18 Links (11.88 feet)
W. Pine 5" N 39 degrees W, 30 Links (19.80 feet)
N. Pine 18" S 8 degrees E, 40 Links (26.40 feet)
- 1916 E.B. Horst, Cass County Deputy Surveyor, Cass County Book 68, Page 22, found corner (does not state if he set iron) and added following witnesses:
Popple 5" N 7 degrees 30 minutes E, 46.2 feet
Basswood 10" S 50 degrees W, 30.8 feet
Elm 12" N 36 degrees W, 63.5 feet
Oak 12" S 60 degrees E, 32.8 feet
- 9-3-1969 Bergeron and Krause, USFS, searched area and found the following:
Signs of burned wood N 52 degrees E, 8 Links (5.28 feet)
Pieces of burned wood N 39 degrees W, 30 Links (19.80 feet)
Stump with blaze 48" S 8 degrees E, 40 Links (26.40 feet)
- 11-10-1989 Personnel from Kovanen & Osufsen Inc. chain to search area, found no evidence of corner, or BT's.
- 4-13-1990 Personnel from Kovanen & Osufsen Inc. traverse to search area, found no further evidence of corner, or BT's.
- 6-25-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument using the reestablished NW corner of section 34 and the recovered Horsts 1916 iron pipe which he had set lost between found section corners. We double this distance and extend line to East to reestablish the NE corner of section 34. The following witnesses were established:
W. Oak 6" N 30 degrees W, 54.25 feet
Basswood 10" S 45 degrees W, 29.67 feet
Ash 6" S 45 degrees E, 47.44 feet
Basswood 12" N 43 degrees E, 27.02 feet
Set 8' long steel sign post with sign attached, South 4.2 feet
Set 8' long steel sign post with sign attached, North 3.6 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.