

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 34, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6/27/90 placed a 2 inch x 54 inch Brass Cap Monument  
DATE

Monument marked

### SKETCH OF REFERENCE TIES

Not to scale

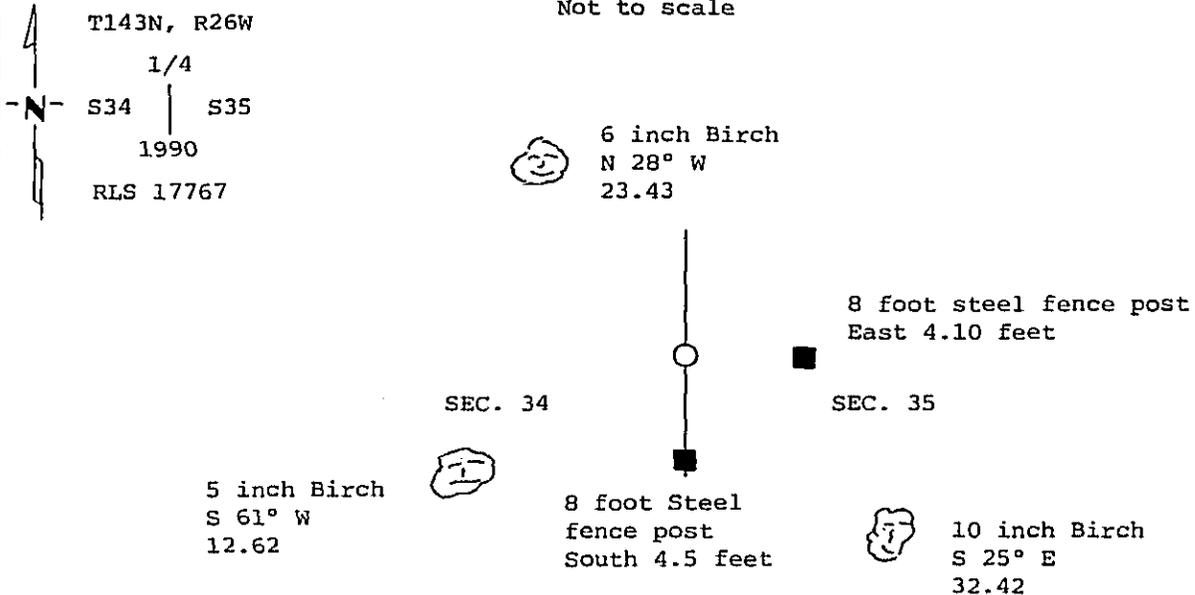

Bearings are true

All trees are scribed, painted, with a 30d spike in side, and a USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325156

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Dunfee

Date 11/14/90 Registration No. 17767

### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:10 P. M. on the 21 day of November A.D., 19 90

County Recorder Claudia Kayle

By mv, Deputy

DOCUMENT NO. 325156

Statement of Evidence:

X17 East quarter corner section 34

1/4 Cor. 34 and 35 (E 1/4 Cor. Sec. 34)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
Birch 10" S 55 degrees W, 30 Links (19.80 feet)  
Spruce 8" N 64 degrees E, 15 Links ( 9.90 feet)
- 1968 C. Krause, USFS, chained to area from section corner to south, found no evidence of corner or BT's.
- 11-14-1989 Personnel from Kovanen & Osufsen Inc. chained to area from section corner to south, this area has been logged and burned, no evidence of corner found.
- 6-27-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument midway and on line between the recovered SE corner of section 34 and the reestablished NE corner of section 34. Then witnessed as follows:  
Birch 6" N 28 degrees W, 23.43 feet  
Birch 5" S 61 degrees W, 12.62 feet  
Birch 10" S 25 degrees E, 32.42 feet  
Set 8' long steel sign post with sign attached, East 4.1 feet  
Set 8' long steel sign post with sign attached, South 4.5 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.