

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 6, Township 142N, Range 26W, 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8-9-90 placed a 2"x48" brass capped monument  
DATE

Monument marked

### SKETCH OF REFERENCE TIES Not to scale

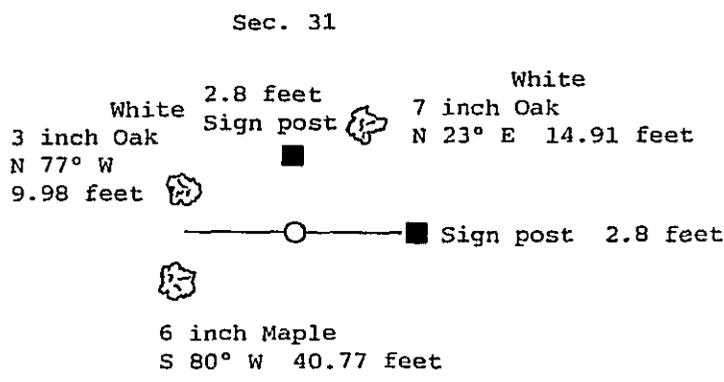

All bearings true

All trees scribed, painted with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325158

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Carpenter

Date 4/14/90 Registration No. 17767

### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:12 P.M. on the 21 day of November A.D., 19 90

County Recorder Cladine Kayler

By MS, Deputy

DOCUMENT NO. 325158

Statement of Evidence:

A3 South quarter corner section 31

1/4 Cor. 6 and 31 (S 1/4 Cor. Sec. 31)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
Maple 6" S 15 degrees E, 14 Links (9.24 feet)  
Spruce 6" N 22 degrees W, 11 Links (7.26 feet)
- 4-8-1963 R. McDonald, USFS, found no evidence of original corner, he found a 1.25" iron pipe 20' north of old fence corner. He placed a FSMLP on a 4" Oak N 74 degrees E, 9.5 feet from iron pipe.
- 11-17-1989 Personnel from Kovanen & Osufsen Inc. chain to area from section corner to east, search at record distance and fence corner, no evidence of original corner or BT's found. They find a 1.5" iron pipe and a 1963 FS tag on fence corner post.
- 8-9-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 48" brass capped monument at position established by doubling distance and extending line to the west from the NE corner of section 31 and the recovered East sixteenth corner of section 31. This sixteenth corner was in place prior to the World War 2, according to testimony by Mrs. Slater, a longtime resident of the area. We believe this corner to have been set while County Ditch Number 5 was being surveyed in 1916 as 3 Slaters worked on the survey crew with F.F. Wilson. The following witnesses were established:  
W. Oak 3" N 77 degrees W, 9.98 feet  
Maple 6" S 80 degrees W, 40.77 feet  
W. Oak 7" N 23 degrees W, 14.91 feet  
Set 8' long steel sign post with sign attached, East 2.8 feet  
Set 8' long steel sign post with sign attached, North 2.8 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.