

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 4, Township 142N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 8/27/90 found a 1 1/2" iron pipe  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9/4/90 placed a Aluminum Cap on existing iron pipe stamped as  
DATE  
shown below.

Monument marked

SKETCH OF REFERENCE TIES

Not to scale

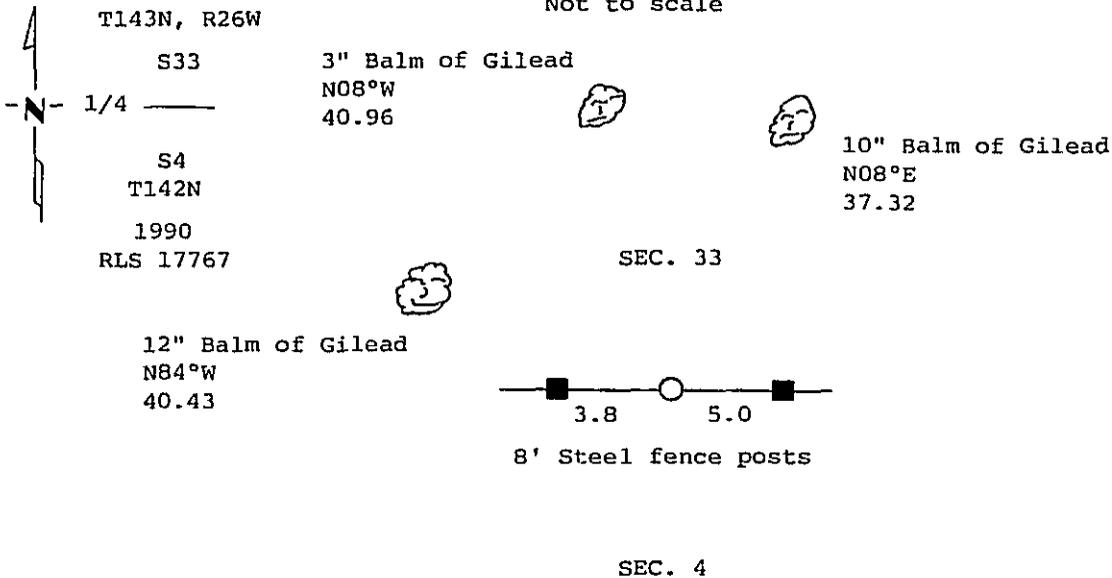

All Bearings true

All trees are scribed, painted, with a 30d spike in side, and a USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

325161

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Dwyer

Date 11/14/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:15 P.M. on the 21 day of November A.D., 1990

County Recorder Claudia Kaye

By (Signature), Deputy

DOCUMENT NO. 325161

Statement of Evidence:

A11 South quarter corner section 33

1/4 Cor. 4 and 33 (S 1/4 Cor. Sec. 33)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
Fir 10" S 23 degrees E, 13 Links ( 8.58 feet)  
White Pine 18" N 31 degrees E, 19 Links (12.54 feet)
- 7-13-1916 Notes for County Ditch Number 5, on file in Cass County Survey Office state F.F. Wilson, a Field Engineer, found original BT's, W. Pine laying on ground, no post, he then set a 1.5" iron pipe and witnessed as follows:  
W. Pine stump 8" S 68 degrees W, 10.5 feet  
W. Pine stump 24" N 39 degrees E, 71.6 feet
- 1963 McDonald and Ekstrom, USFS, search for 2 hours, notes do not state if anything was found.
- 8-27-1990 Personnel from Kovanen & Osufsen Inc. found 1.5" iron pipe in good condition, also stump holes at 1916 BT positions.
- 9-4-1990 Personnel from Kovanen & Osufsen Inc. attach an aluminum cap to the found iron pipe and add the following witnesses:  
Balm of Gilead 10" N 08 degrees E, 37.32 feet  
Balm of Gilead 12" N 84 degrees W, 40.43 feet  
Balm of Gilead 3" N 08 degrees W, 40.96 feet  
Set 8' long steel sign post with sign attached, West 3.8 feet  
Set 8' long steel sign post with sign attached, East 5.0 feet

This position is traceable to the original GLO corner.