

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 2, Township 142N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6-25-90 placed a 2"x54" Brass capped monument  
DATE

Monument marked

### SKETCH OF REFERENCE TIES Not to scale

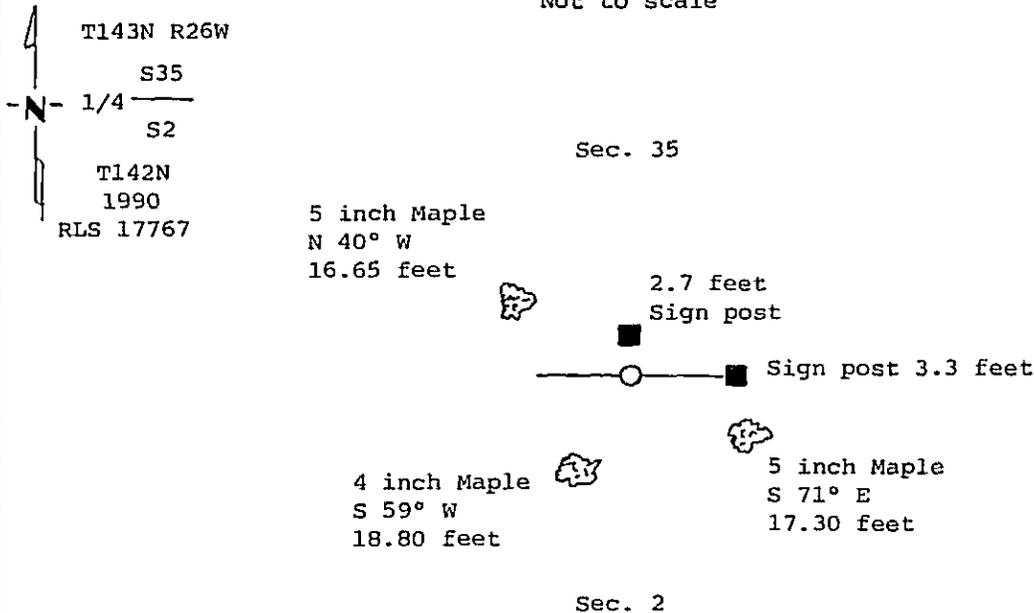

All trees scribed, painted, with a 30d spike, and USFS 54-3 tag.

All bearings true

Statement of evidence relative to this corner location is on back of page.

325162

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Davenport

Date 11/14/90 Registration No. 17767

#### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:16 P.M. on the 21 day of November, A.D., 19 90

County Recorder Chondine Kayler  
 By m), Deputy

DOCUMENT NO. 325162

Statement of Evidence:

A19 South quarter corner section 35

1/4 Cor. 2 and 35 (S 1/4 Cor. Sec. 35)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
Birch 10" N 60 degrees E, 20 Links (13.20 feet)  
White Pine 6" S 44 degrees W, 33 Links (21.78 feet)
- 9-31-1963 W. Okerman, USFS, chained to area from the north, no evidence of corner or BT's found.
- 11-17-1989 Personnel from Kovanen & Osufsen Inc. chain to area from section corner to west, area has been logged in recent years and burned years back, no evidence of corner or BT's found.
- 6-25-1990 Personnel from Kovanen & Osufsen Inc. traverse to area and make additional search of area, no evidence found. They set a 2" x 54" brass capped monument midway and on line between the recovered SE corner of section 35 and the recovered SW corner of section 35. The following witnesses were established:  
Maple 5" N 40 degrees W, 16.65 feet  
Maple 4" S 59 degrees W, 18.80 feet  
Maple 5" S 71 degrees E, 17.30 feet  
Set 8' long steel sign post with sign attached, East 3.3 feet  
Set 8' long steel sign post with sign attached, North 2.7 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.