

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 29, Township 134, Range 32, 5 th. P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1988 found 3/4" IRON PIPE IN PLACE
DATE
- left monument as found, lowered monument, removed monument (explain).
- On 8-31-90 placed a 2" X 2" X 18" TELES PAR MONUMENT WITH ALUMINUM
DATE CAP FLUSH WITH BLACKTOP

NOT TO SCALE SKETCH OF REFERENCE TIES

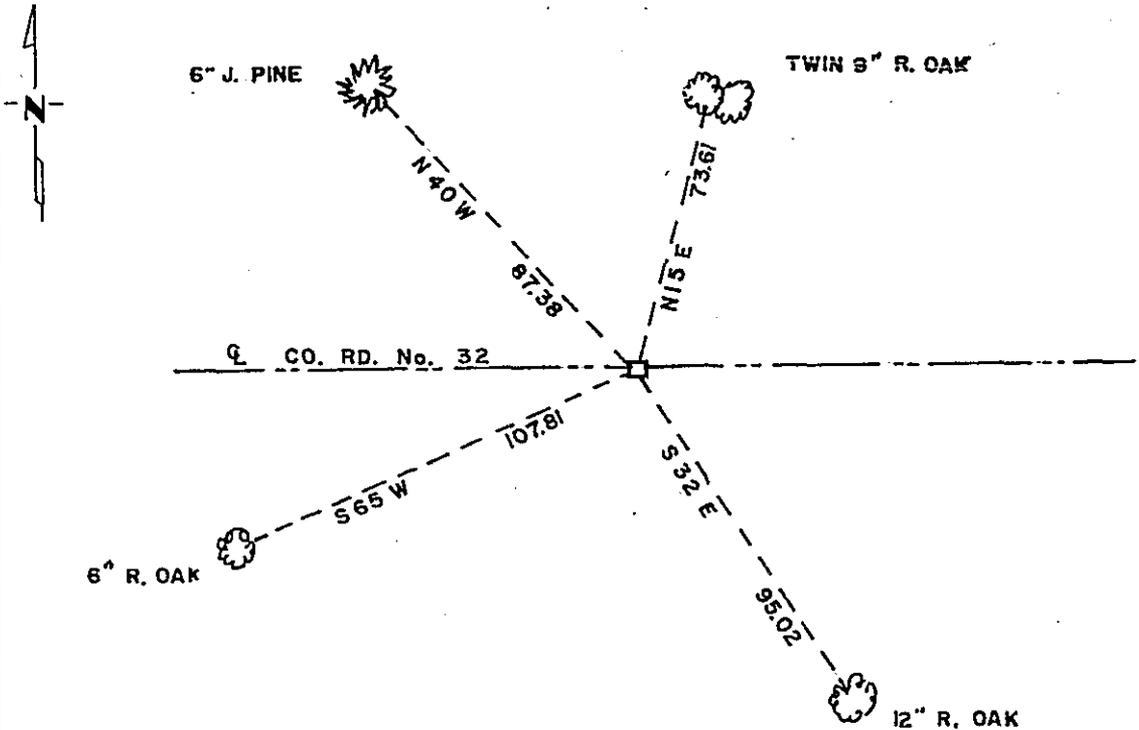

DIST. TO SPK. IN SIDE OF TREE

Statement of evidence relative to this corner location is on back of page. 325735

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Claus 12-20-90
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:20 P.M. on the 21 day of December A.D., 19

County Recorder Claudine Kayler
By MJ, Deputy

DOCUMENT NO. 325735

Statement of Evidence:

R 9, NE corner of SEc. 29, Twp. 134, Rge. 32

1870: Original survey set a wood post and marked BT's as follows:

B. Pine 8" N 63 W 23 lks.
B. Pine 8" S 37 W 24 lks.
Pine 7" N 15½ E 26 lks.

1988: Cass County Hwy. Dept. survey crew found an iron pipe of unknown origin in centerline of the county road. No evidence of original corner remains. This monument destroyed in new road construction.

1990: Walt Curo and Cass County Hwy. Dept. survey crew reset corner with a 2" x 2" x 6" telespar monument with aluminum cap. I accept this position as monumented by others as the best evidence of location for this corner. Mark new BT's as shown on front.