

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 144, Range 31, 5 th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9-27-90 found a 1" IRON PIPE, DOWN 1' BELOW SURFACE LOCATED IN  
℄-℄ OF RD'S N-S, AND E-W  
 left monument as found,  lowered monument,  removed monument (explain)
- On 9-27-90 placed a 3/4" 18" IRON PIN OVER PIPE AND DRIVE IT DOWN  
2" BELOW SURFACE

NOT TO SCALE

SKETCH OF REFERENCE TIES

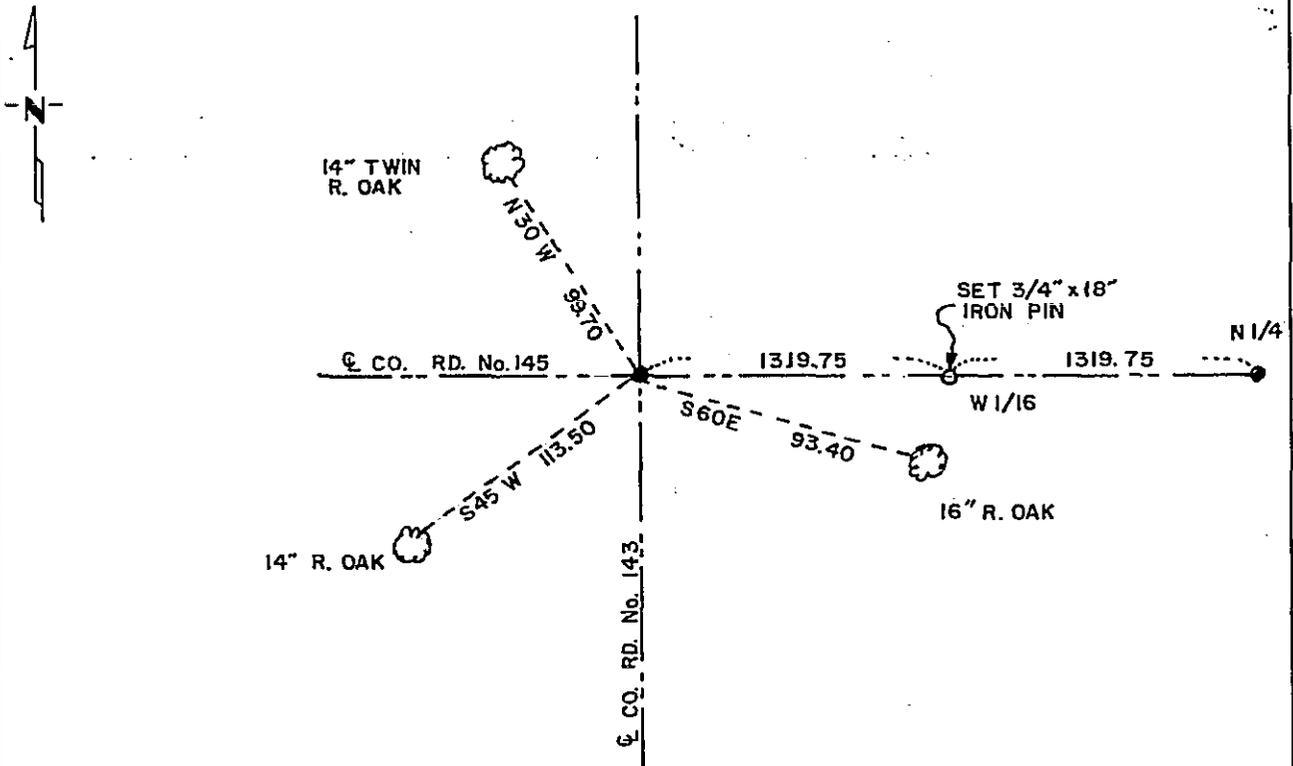

DIST. TO SPK. IN SIDE OF TREE.

Statement of evidence relative to this corner location is on back of page. 325736

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Walter E. Lewis* 12-20-90  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor  
 County Surveyor

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:25 P.M. on the 21 day of December A.D., 19 90

County Recorder *Chloéline Kaylor*  
By *MS*, Deputy  
DOCUMENT NO. 325736

Statement of Evidence: E 5, NE corner of Sec. 7, Twp. 144 Rge. 31

1875: Original survey set a wood post for this corner and marked BT's as follows: 28" W. pine N 45 E 6 lks.  
26" W. pine N 45 W 10 lks.  
26" W. pine S 28 W 61 lks.  
26" W. pine S 32 E 50 lks.

1910: James Middleton found wood stake and original BT's recorded in County Survey Record Book "B", Pg. 578.

1913: John Curo found wood stake and set a 2" x 48" galv. iron pipe. Recorded in County Survey Record Book "B", pages 36-39.

9/27/90: Walt Curo and County Highway Dept. survey crew find a 1" iron pipe at the intersection of the centerlines of county roads east and west with road north and south, 1 foot below surface, set a 3/4" x 18" pin on top, driven down 2" below surface. Mark BT's as shown on front.