

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 145, Range 31, 5 th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1988 found a 1/2" IRON PIPE WITH PLASTIC CAP STAMPED  
DATE  
RLS 12266  
 left monument as found,  lowered monument,  removed monument (explain)
- On 8-28-90 placed a 2"x 2"x 6" TELESPAR MONUMENT WITH  
DATE  
ALUMINUM CAP FLUSH WITH BLACKTOP

NOT TO SCALE

SKETCH OF REFERENCE TIES

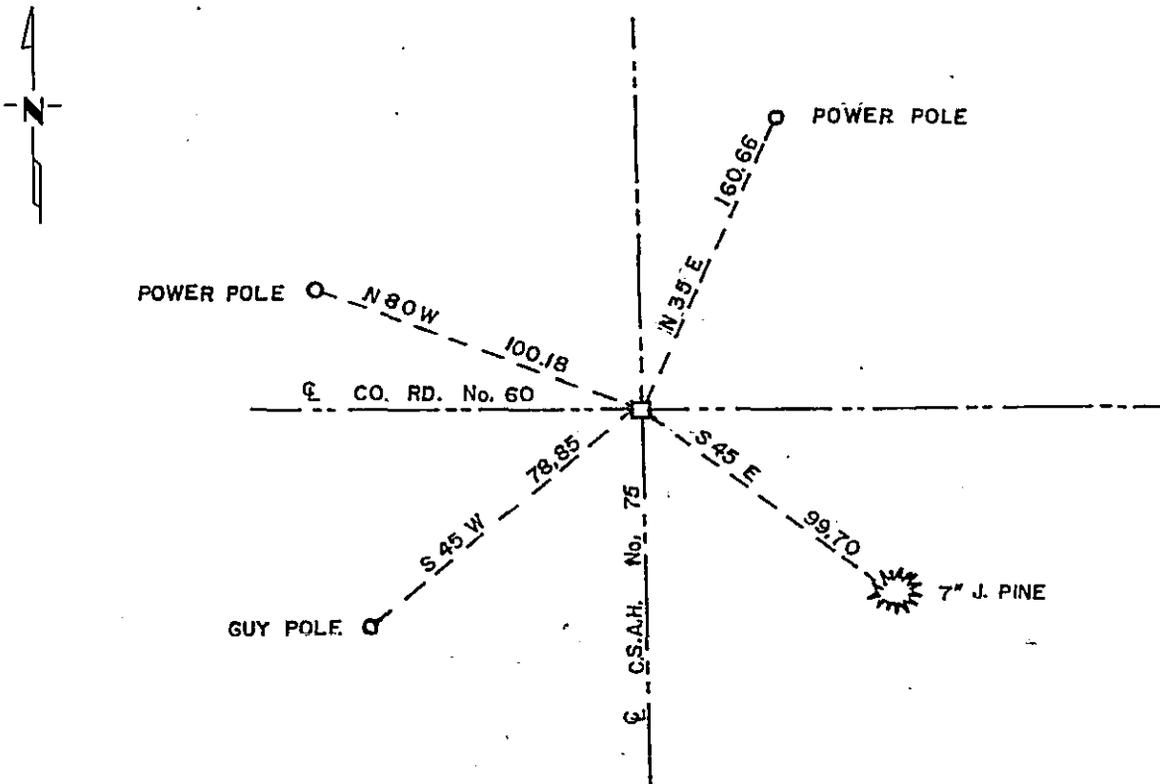

DIST. TO SPK. IN SIDE OF TREE

Statement of evidence relative to this corner location is on back of page. 325740

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-20-90  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:45 P.M. on the 21 day of December A.D., 19 90

County Recorder Clondine Koyler  
By ms, Deputy

DOCUMENT NO. 325740

Statement of Evidence:

E 5, NE corner of SEc. 7, Twp. 145, Rge. 31

1875: Original survey set a wood post and marked BT's as follows:

N.Pine	26"	N 60 E	42 lks.
N.Pine	14"	S 84 E	70 lks.
N.Pine	18"	N 58 W	76 lks.
N.Pine	18"	S 46 E	92 lks.

1906: John Curo set stake from BT stumps. He found all 4 stumps.  
Recorded in County Survey Record Book "A", pages 270-271.

1915: John Curo set a 1½" x 48" iron monument in making county  
resurvey. Recorded in Plat file E-67.

1915: Molyneux found 1½" iron monument set by Curo.

1988: Cass County Hwy. Dept. survey crew found a ½" iron pipe with  
plastic cap stamped RLS 12266 in centerline intersections  
of county roads no. 75 & 60. This monument destroyed in  
road construction.

1990: Walt Curo and Cass County Hwy. Dept. survey crew reset this  
corner with a 2" x 2" x 6" telespar monument with aluminum cap.  
Marked BT's as shown on front.