

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 29, Township 134, Range 32, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 1988 found a 1/2" IRON PIN IN PLACE, WHICH WAS DESTROYED
DATE
IN ROAD CONSTRUCTION

left monument as found, lowered monument, removed monument (explain)

On 8-31-90 placed a SET 2"x2"x6" TELESPAR MONUMENT WITH ALUMINUM
DATE
CAP FLUSH WITH SURFACE OF BLACKTOP

NOT TO SCALE

SKETCH OF REFERENCE TIES

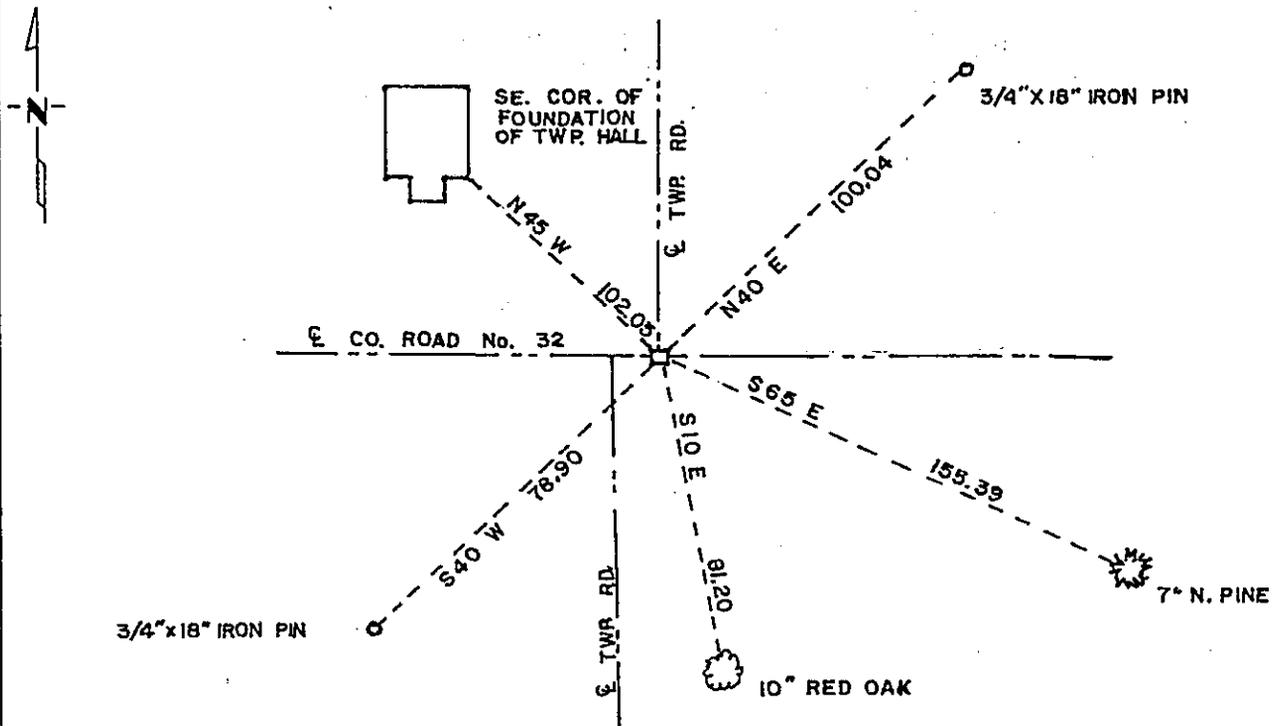

DIST. TO SPK. IN TREE

Statement of evidence relative to this corner location is on back of page.

325742

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Claus 12-20-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:55 P.M. on the 21 day of December A.D., 1990

County Recorder Claudine Kayler
By M, Deputy

DOCUMENT NO. 325742

Statement of Evidence: R 7, N $\frac{1}{4}$ corner of Sec. 29, Twp. 134, Rge. 32

1870: Original survey set a wood post and marked BT's as follows:
Oak 10" S 72 W 112 lks.
B.Pine 10" N 34 W 114 lks.

1988: Cass County Hwy. Dept. survey crew found a $\frac{1}{2}$ " iron pipe of unknown origin in centerline of County Road #32 and in line with the centerline of the twp. road to the north. No evidence of original BT's remaining. This monument destroyed in new road construction.

1990: Walt Curo and Cass County Hwy. dept. survey crew reset this corner with a 2" x 2" x 6" telespar monument with aluminum cap, flush with blacktop. I accept this position as monumented by others as the best evidence of location for this corner. Mark new BT's as shown on front.