

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 33, Township 134 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8/29/88 found a 1½" WELL POINT (FLUSH) WITH A 3"x6"x16" STONE
(DOWN 0.3') ON NORTH SIDE OF WELL POINT.
 left monument as found, lowered monument, removed monument (explain)
(SEE NOTE)
- On 8/29/88 placed a 1½"x1½"x20" PERFORATED STEEL TUBE WITH
ALUMINUM CAP STAMPED "DNR SURVEY MARKER", (DOWN 0.5')

SKETCH OF REFERENCE TIES

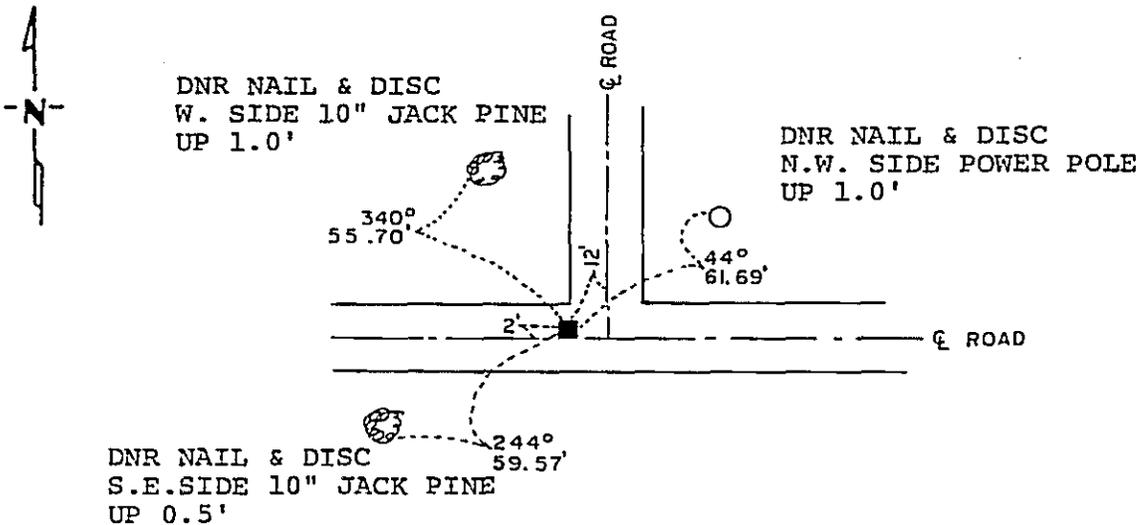

NOTE: WE REPLACED WELL POINT WITH DNR SURVEY MARKER, AND RESET STONE ON NORTH SIDE OF SURVEY MARKER (DOWN 0.8')

AZIMUTHS OBSERVED
WITH A COMPASS

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

DDS 2/16/89
FILE A-49196

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 12-28-90
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Clum

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P. M. on the 2 day of January A.D., 19 91

County Recorder Clairine Koyler

By MS, Deputy

DOCUMENT NO. 325964

Northeast Corner Section 33, Township 134 North, Range 32 West, 5th P.M.

The following offices were contacted for information on this corner:

Secretary of State
Wadena County Highway Department
Cass County Surveyor
Cass County Highway Department
Landecker and Associates, Inc., Pequot Lakes, MN
Roy A. Smith and Associates, Inc., Detroit Lakes, MN
Comstock and Davis, Little Falls, MN
Richard Howe, Alexandria, MN

1870 This corner was established by the U.S. General Land Office and monumented with a post and witnessed by the following bearing trees:

8" Black Pine, South 20° West, 210 links
10" Aspen, South 60° East, 164 links
10" Aspen, North 25° East, 213 links

1988 The Department of Natural Resources, Bureau of Engineering, made a search for the corner but no evidence of the original government survey was found. We found a 1½" diameter well point two feet north of centerline of an east-west gravel road and 12 feet west of centerline of a road north. There was no occupation to the south.

We also found a 3"x6"x16" stone on the north side of the well point and down 0.3 feet. We have no records as to who set the well point or stone.

The BOE accepted the well point as marking the corner and replaced it with a DNR Survey Marker to perpetuate the corner position. Reset the stone on the north side of the marker down 0.8'.

Traverse information is available from the DNR Bureau of Engineering.