

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 29, Township 143, Range 25, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 1990 found a 2" GALV. IRON PIPE WITH BRASS CAP SET BY THE USFS
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

NOT TO SCALE

SKETCH OF REFERENCE TIES

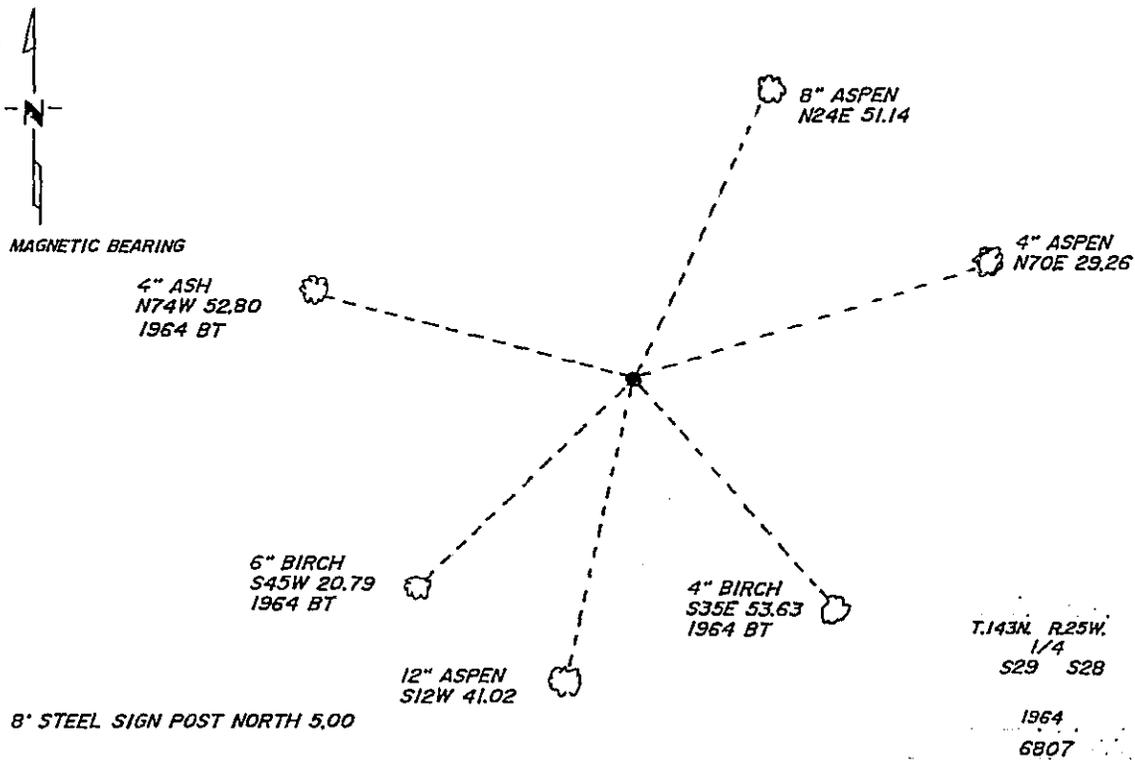

NOTE: ALL BT'S ARE BLAZED, SCRIBED AND PAINTED WITH RED ENAMEL PAINT WITH BT SIGNS, AND ALL MEASUREMENTS ARE HORIZONTAL TO SPIKE IN SIDE OF TREE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Larson
SIGNATURE

1-22-91
DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of 326339

I hereby certify that this document was filed in the Co. Recorders office at 9:20 A. M. on the 25 day of January A.D., 19 91

County Recorder Claudia Kayler

By Ms, Deputy

DOCUMENT NO. 326339

Statement of Evidence:

T-9 E 1/4 Corner to Sec. 29, T.143N., R.25W.

1872 Original survey by Hayward and Griffin, set a wood post and marked bt's as follows:

6" Linden	S88W	151ks.
8" Cedar	S35E	141ks

1913 John Curo set 4"x4"x36" Cedar post, in County record book B, pages 4-11, he states that they found original bearing trees for the 1/4 corner, and and marked new bearing trees with spike in blaze, as follows:

24" Cedar stump	S73E	32.6ft.
24" Cedar stump	S29E	72.98ft.

1964 Bill Okerman, USFS, found remains of stump with spike in blaze S73E 32.6 ft. He set a 2"x60" iron pipe with brass cap, filed an affidavit, and marked new bearing trees as follows:

4" Birch	S35E	80.5 lks.
----------	------	-----------

6" Birch	S45W	31.5 lks.
6" Ash	N74W	80 lks.

1976 B.L.M. making a dependent resurvey of part of the township found and accepted the brass cap set by the USFS.

1989 The USFS used this corner as part of a traverse around section 28.

1990 Walt Curo accepts the brass cap monument for this corner as this position is traceable to original. Marked new bearing trees as shown on front.