

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 29, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:



On 11/19/90 found a 2 inch diameter capped iron pipe
DATE

left monument as found, lowered monument, removed monument (Explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

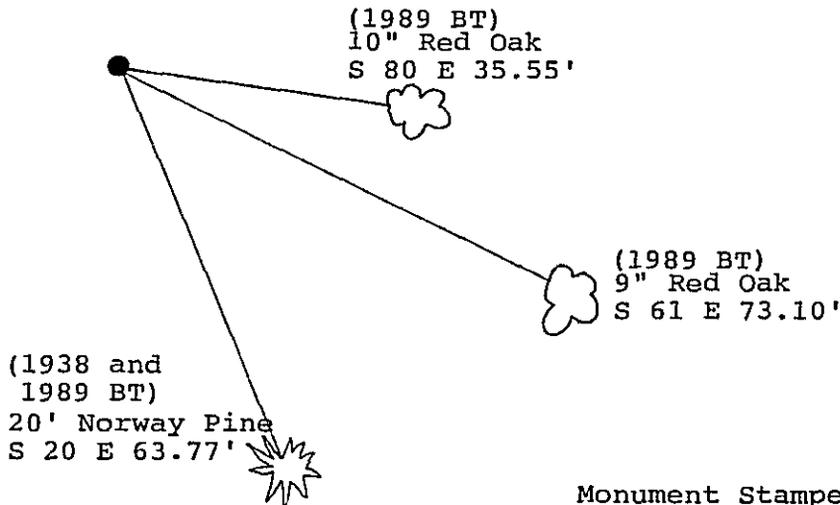

8' Steel sign post North 4.2'
8' Steel sign post West 3.95'

Monument Stamped
T142N R31W
 $\frac{1}{4}$ S20
S29
1990
RLS 17008

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 326717

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Sachin 3/12/91
SIGNATURE DATE

Registration No. 17008

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:55 P.M. on the 14 day of February A.D., 19 91

Register of Deeds Clondine Kayler
 By m, Deputy

DOCUMENT NO. 326717

North Quarter corner, Section 29, Township 142 North,
Range 31 West, Cass County, Minnesota

R-7 142-31

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 48 inch White Pine North a distance of 40 links; a 30 inch White Pine South 19 degrees East a distance of 13 links.

1915 County Surveyor's Record Book B pages 442-454 shows survey by John Curo. He found old government bearing trees: stump of 48 inch White Pine North 40 links; and stump of 30 inch White Pine South 19 degrees East a distance of 13 links. He set a 2 1/2 inch by 48 inch galvanized iron pipe with cap. The notes do not indicate that any bearing trees were marked.

1915 County resurvey in County Recorder's Office file cabinet E Number 60 shows survey by John Curo. The plat indicates a 2 1/4 inch by 48 inch galvanized iron pipe with cap in place.

1915 County resurvey in County Recorder's Office file cabinet E Number 61 shows survey by John Curo. The plat indicates a 2 1/4 inch by 48 inch galvanized iron pipe with cap in place.

1915 County Surveyor's Record Book C page 516 shows survey by Baldwin. He found the Curo corner. The notes do not indicate that any bearing trees were marked.

1938 Civilian Conservation Corps found the County iron pipe 8 inches above ground. They placed a metal location poster on a 12 inch Red Pine South 20 degrees East a distance of 97 links. No bearing trees were found.

1974 William Okerman, Licensed Land Surveyor Number 6807, prepared Plat of Survey of U.S. Government Land for part of Section 20, Township 142 North, Range 31 West. The plat indicates a Cass County monument in place.

1989 on January 17, United States Forest Service crew found the corner monumented with a 2 inch iron pipe 12 inches above ground.

1989 on December 4, USFS Technicians, Krause and Brama, marked the following new bearing trees: a 20 inch Norway Pine South 20 degrees East a distance of 63.77 feet; a 9 inch Red Oak South 61 degrees East a distance of 73.10 feet; and a 10 inch Red Oak South 80 degrees East a distance of 35.55 feet. Two 8 foot steel sign posts were set North 4.2 feet and West 3.95 feet.

1990 on November 19, a Landecker & Associates, Inc. survey crew found a 2 inch diameter capped iron pipe and 1989 USFS bearing trees. They left monument as found, however, stamped the cap as shown on front of this certificate. Bearing trees are marked as shown and steel sign post in place as noted on front of this certificate. The found capped iron pipe is accepted as a perpetuation of the original government corner as re-monumented by John Curo in 1915.