

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 18, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 11/28/90 found a 2 inch iron pipe up 10 inches  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On 2/4/91 placed a aluminum cap on found 2 inch iron pipe  
DATE

Magnetic Decl: 5° East  
 Not to Scale

### SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

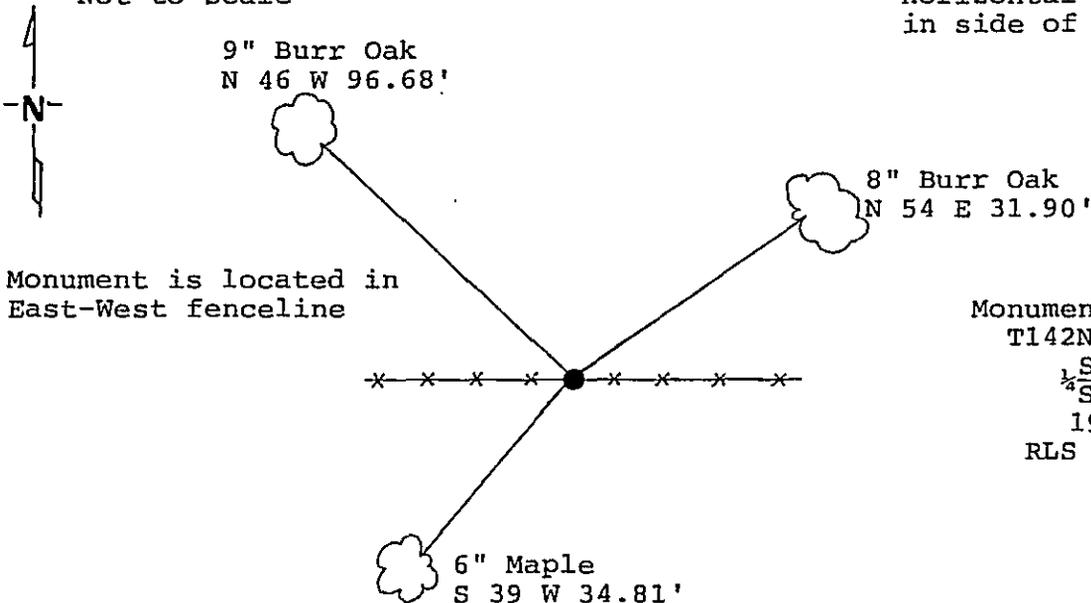

Monument is located in East-West fenceline

Monument Stamped  
 T142N R31W  
 $\frac{1}{4}$  S | 7  
 S | 18  
 1991  
 RLS 17008

8' steel sign post Easterly 3.25'.

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 327268

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Alvin D. Lindholm* 3/6/91  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:25 P.M. on the 11 day of March A.D., 1991

Register of Deeds *Chloë K. Ogden*

By *MS*, Deputy

DOCUMENT NO. 327268

North Quarter corner, Section 18, Township 142 North,  
Range 31 West, Cass County, Minnesota

J-3 142-31

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Poplar North 29 degrees West a distance of 18 links; a 4 inch Birch South 44 degrees West a distance of 8 links.

1915 County Surveyor's Record Book C, page 44, shows a survey by E.B. Horst. An iron monument was set at the lost, single proportion position on the north line of Section 18.

1915 County resurvey in County Recorder's Office file cabinet E number 57 shows survey by John Curo. An iron monument was found as set by Horst.

1920 County Surveyor's Record Book C, page 472 shows survey by E.B. Horst. An iron monument was found.

1921 County resurvey in County Recorder's Office file cabinet E number 59 shows survey by E.B. Horst. An iron monument was found.

1990 a Landecker & Associates, Inc. survey crew locate 2 inch iron pipe, up 10 inches, on fence line in traverse of Section 7. They also find USFS location poster on dead 8 inch Aspen. The found iron compares well with the other monuments on the north line of Section 18 as shown on the 1915 Curo survey plat in Section 7 and the 1921 Horst survey plat of Section 18. Landecker & Associates, Inc. accepts the found iron as the corner established by Horst in 1915 and perpetuated by the 1915 and 1921 Resurvey plats.

1991 on February 4, a Landecker & Associates, Inc. survey crew place an aluminum cap on found 2 inch iron pipe, up 10 inches. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.