

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness to

Meander corner #49 Corner of Section 7, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On _____ found a _____
DATE


left monument as found, lowered monument, removed monument (Explain)

On 3/7/91 placed a 2 inch by 48 inch iron pipe with brass cap
DATE

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

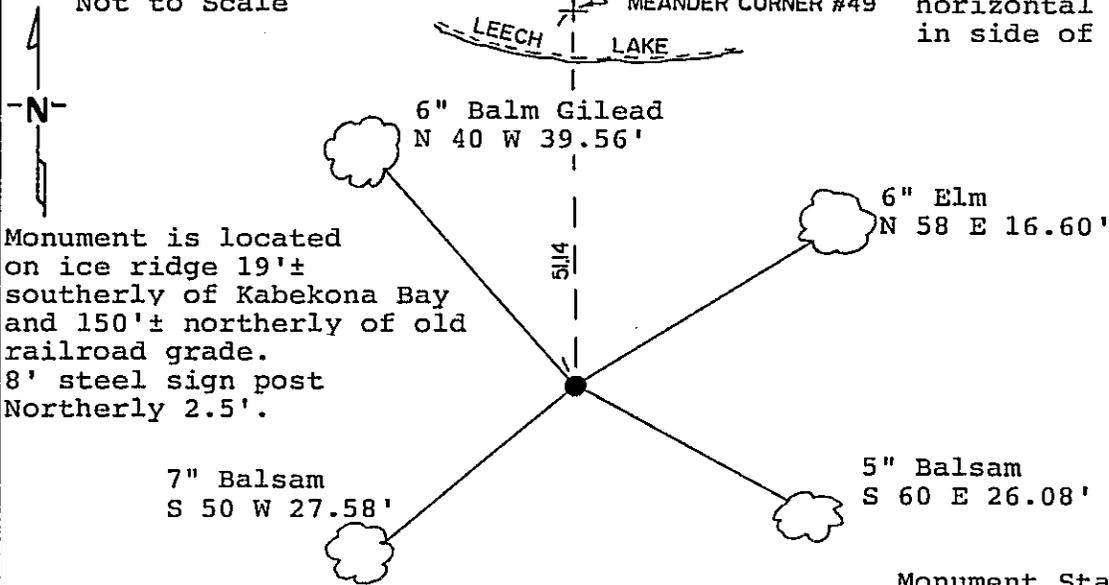

Monument Stamped

51.14
↑
T142N
R32WR31W
WCMC
S12+S7
1991

RLS 17008

Corner is in high visibility area.
Trees have 54-3 (bearing tree) tags only.

Statement of evidence relative to this corner location is on back of page. 327604

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 3/26/91
SIGNATURE DATE

Registration No. 17008

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:58 P.M. on the 27 day of March A.D., 1991

Register of Deeds Clondine Kaylor

By [Signature], Deputy

DOCUMENT NO. 327604

Meander corner number 49, Section 7, Township 142 North,
Range 31 West, Cass County, Minnesota

EF-1

142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the west line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 16 inch Aspen South 25 degrees East a distance of 17 links; and a 12 inch Aspen West a distance of 41 links.

1915 Cass County Surveyor's Office records on microfilm roll 11 S, Book 78, page 93 show a survey by E.B. Horst. The notes indicate that he set the witness corner 47.52 feet south of meander corner.

1915 County resurvey in County Recorder's Office file cabinet E number 57 shows survey by John Curo. The plat indicates a 2 and 1/4 inch by 48 inch iron monument was found for a witness corner to the meander corner.

1988 United States Forest Service personnel locate irons marked with Pete Meyer's registration number. These irons were between North One Sixteenth corner and south side of lake. Also found was a 2 inch iron pipe tipped over, buried in ice ridge.

1990-1991 Landecker & Associates, Inc. survey crew tie into USFS traverse. No evidence found of 1915 WCMC. It was determined that the pipe found by USFS in 1988 was not marking the 1915 WCMC position. It was found tipped over and was not on the line as computed with the other irons on the west line of the section.

1991 on March 7, a Landecker & Associates, Inc. survey crew set a 2 inch by 48 inch iron pipe with brass cap to witness the meander corner as monumented by Horst in 1915 and perpetuated by the 1915 Curo plat. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.