

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 30, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 2/15/91 found a 2 inch capped iron pipe up 11 inches, stamped cap
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES


All distances are horizontal to nail in side of tree



Monument Stamped
 T142N R31W
 $\frac{1}{2}$
 S30+S29
 1991
 RLS 17008

Monument is located near top of ridge. Large valley northerly.

8' steel sign post Westerly 3.85'.
 8" steel sign post Northerly 4.0'.

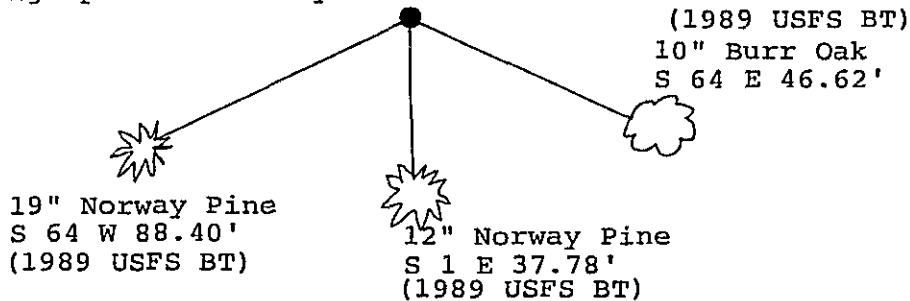

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 327607

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 3/26/91
SIGNATURE DATE

Registration No. 17008

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:10 P. .M. on the 27 day of March A.D., 19 91

Register of Deeds Clondine Kaylor

By M.J., Deputy

DOCUMENT NO. 327607

East Quarter corner, Section 30, Township 142
North, Range 31 West, Cass County, Minnesota

T-5 142-31

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Poplar North 27 degrees West a distance of 18 links; and a 4 inch Burr Oak North 40 degrees East a distance of 12 links.

1915 County Surveyor's Records on microfilm roll 11 S, Book 83, page 22 shows survey by Scott Miller. The notes indicated an iron monument was set, but do not mention any new bearing trees.

1915 County Surveyor's Record Book C, page 513 shows survey by E.B. Horst. The notes indicate an iron monument was set, but do not mention any new bearing trees.

1915 County resurvey in County Recorder's Office file cabinet E number 61 shows survey by John Curo. A 2 and 1/4 inch by 48 inch iron monument was found.

1988-1989 United States Forest Service personnel find 2 inch capped iron monument in place while traversing around Section 29. The pipe was found up 18 inches, they lowered it to 10 inches above ground. They marked new bearing trees: a 19 inch Norway Pine South 64 degrees West a distance of 88.40 feet; a 12 inch Norway Pine South 1 degree East a distance of 37.78 feet; and a 10 inch Burr Oak South 64 degrees East a distance of 46.62 feet. They set 8 foot steel sign posts North a distance of 4.0 feet and West a distance of 3.85 feet.

1991 on February 15, a Landecker & Associates, Inc. survey crew found a 2 inch capped iron pipe up 11 inches near top of ridge. They also found the bearing trees marked by the USFS in 1989 and steel sign posts set by the USFS as noted on front of this certificate. They stamped the found iron pipe. The found capped iron pipe fits well with other corners along the east line of Section 30. Landecker & Associates, Inc. accepts the capped iron as a perpetuation of the corner as set by Miller and Horst in 1915.