

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast _____ Corner of Section 29, Township 140, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/7/91 placed a 2" square tubular monument 36" long with
DATE
aluminum cap, up 10".

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

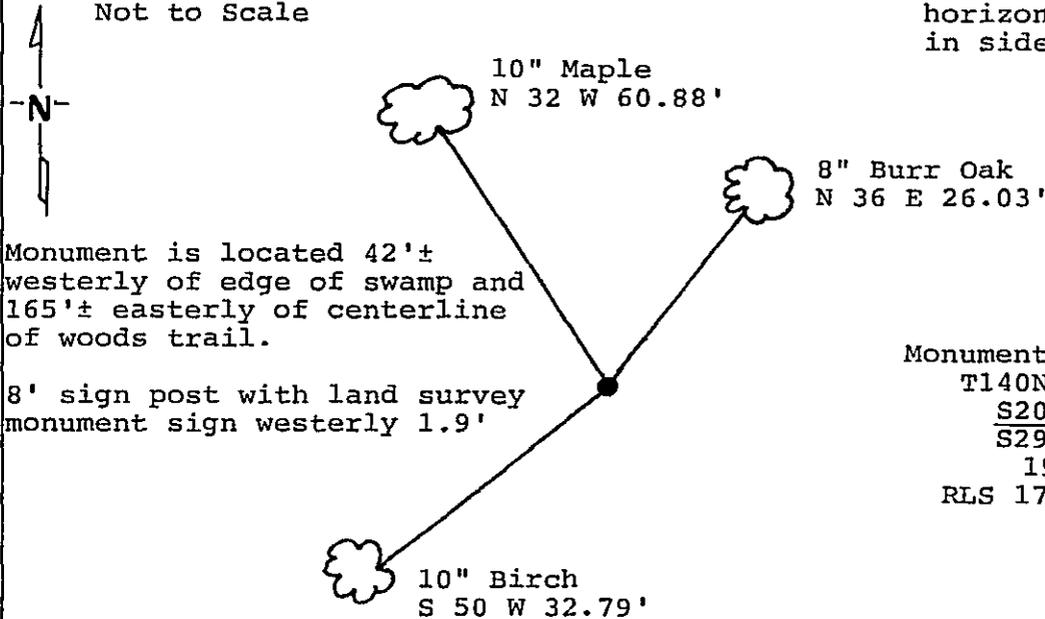

Statement of evidence relative to this corner location is on back of page. 329219

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 6/10/91
SIGNATURE DATE

Registration No. 17008
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:20 P.M. on the 11 day of June A.D., 1991

Register of Deeds Clodine Kayler
 By [Signature], Deputy

DOCUMENT NO. 329219

Northeast corner, Section 29, Township 140 North,
Range 27 West, Cass County, Minnesota

R - 9

1873 Fendall G. Winston, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 27 West. The notes indicate a wood post was set and the following bearing trees were marked: a 7 inch Spruce South 62 degrees 30 minutes West a distance of 40 links; a 9 inch Birch North 20 degrees West a distance of 67 links; a 6 inch Birch North 4 degrees 45 minutes East a distance of 33 links; and a 7 inch Tamarack South 40 degrees 20 minutes East a distance of 115 links.

1938 Civilian Conservation Corps, notes for Washburn Lake, Book 6, page 72. The notes indicate that a 3 inch squared post was found 115 feet south of line, at 5280 feet from east, set approximate corner. Book 9, page 1, start west from corner 115 feet south.

1990 in November and April 1991 a Landecker & Associates of Walker, Inc. survey crew searches for corner. They find no evidence of original corner monumentation. This corner position was established in its obliterated position utilizing and evaluating the original survey feature calls, the 1938 Civilian Conservation Corps survey records and other local section monumentation. 1991 in May, a Landecker & Associates of Walker, Inc. survey crew set a 2 inch squared tubular monument 36 inches long with aluminum cap up 10 inches at this obliterated corner position. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.

NOTE: See subdivision map on Sheet 2 of 2 of STEVENS LAKE
HOMESITES plat of record.