

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 28, Township 140, Range 27, 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/24/91 placed a 2" square tubular county monument with
DATE stamped aluminum cap up 11"

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree

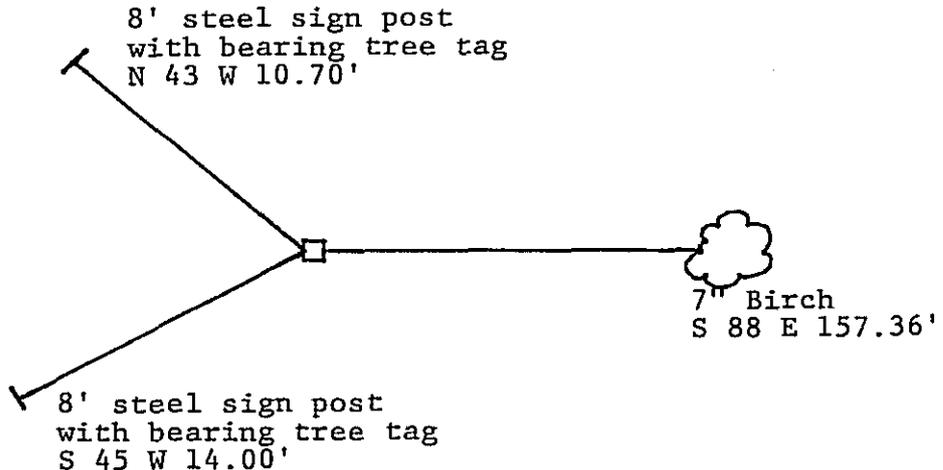

Corner is located at edge of Tag Alder swamp, 284'± westerly of trail.

8' steel sign post West 2.35'

Statement of evidence relative to this corner location is on back of page 329220

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 6/10/91 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:25 P.M. on the 11 day of June A.D., 1991
County Recorder Chondine Keyler
By ms, Deputy

DOCUMENT NO. 329220

Statement of Evidence:

North Quarter corner, Section 28, Township 140
North, Range 27 West, Cass County, Minnesota

R - 11

1873 Fendall G. Winston, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 27 West. The notes indicate a wood post was set to mark the corner position and the following bearing trees were marked: an 8 inch Tamarack North 8 degrees East a distance of 14 links; and a 6 inch White Pine South 22 degrees 30 minutes East a distance of 28 links.

1990 in November, a Landecker & Associates of Walker, Inc. survey crew searched for evidence of the original survey and found nothing. In May 1991, Landecker & Associates determine the corner to be lost and compute the lost position by single proportion measurement between the Northwest and Northeast corners of Section 28. On May 24, they make a final search for the corner, finding nothing, they set a 2 inch square tubular county monument with stamped aluminum cap at the computed single proportion position. A new bearing tree was marked and steel sign posts set as shown on front of this certificate.

NOTE: See subdivision map on Sheet 2 of 2 of STEVENS LAKE
HOMESITES plat of record..