

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 34, Township 140, Range 27, 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 5/9/91 placed a 2" square tubular monument 36" long with  
DATE  
aluminum cap up 12 inches.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree

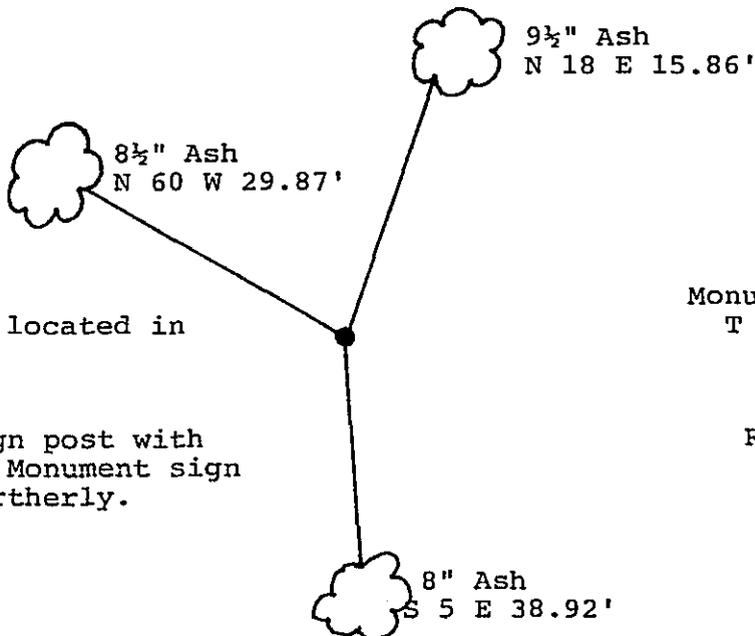

Monument is located in low area

8' steel sign post with Land Survey Monument sign 2.0 feet northerly.

Monument Stamped  
T 140 N R 27 W  
 $\frac{1}{4} \frac{S}{S} \frac{27}{34}$   
1991  
RLS 17008

Statement of evidence relative to this corner location is on back of page. 329226

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

Alvin A. Fisher 6/10/91  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:55 P. .M. on the 11 day of June A.D., 19 91

Register of Deeds Chondie Kayler

By MS, Deputy

DOCUMENT NO. 329226

North Quarter corner, Section 34, Township 140 North,  
Range 27 West, Cass County, Minnesota

V - 15

1873 Fendall G. Winston, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 27 West. The notes indicate a wood post was set and the following bearing trees were marked: a 5 inch Balsam North 6 degrees East a distance of 18 links; and a 5 inch Balsam South 16 degrees West a distance of 13 links.

1991 in April, a Landecker & Associates of Walker, Inc. survey crew compass and chain into corner area to search for original survey evidence and found nothing. On May 9, a Landecker & Associates of Walker, Inc. survey crew make final search for original evidence. Finding none, they set a 2 inch squared tubular monument 36 inches long with aluminum cap up 12 inches at single proportion position between the Northwest and Northeast corners of Section 34. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.

NOTE: See subdivision map on Sheet 2 of 2 of STEVENS LAKE  
HOMESITES plat of record.