

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Point on Line \_\_\_\_\_ Corner of Sections 22/27, Township 140, Range 27, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On 5/24/91 placed a 2" square county tubular monument 36" long  
DATE  
with stamped aluminum cap up 12".

Magnetic Decl: 5° East  
Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

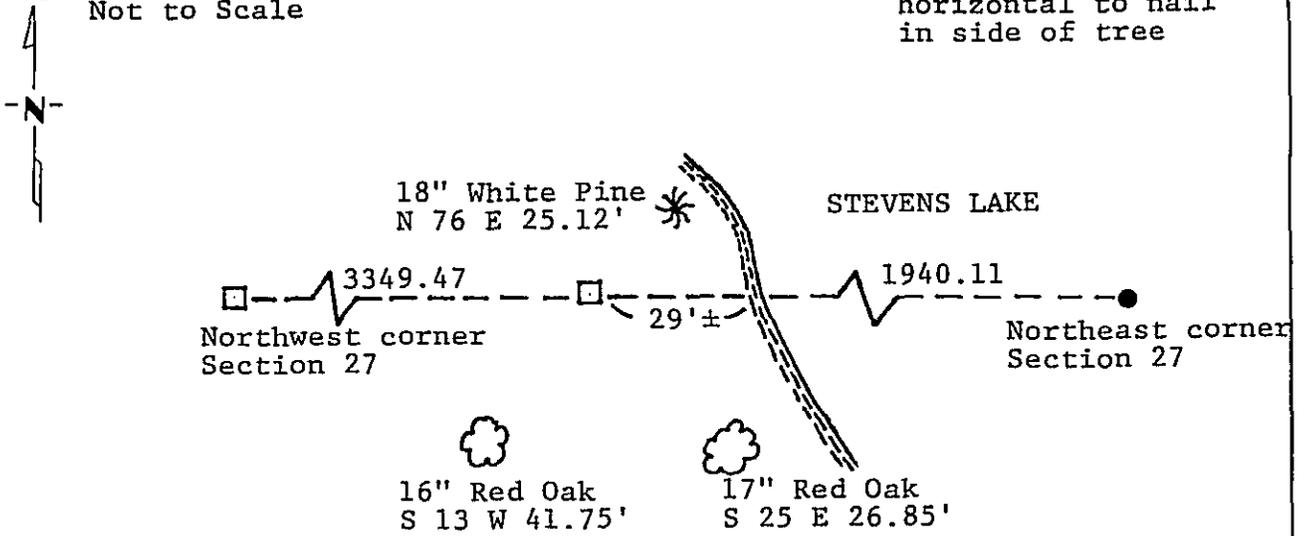

Monument is located on easterly side of point of land, 29'± westerly of waters edge

8' steel sign post easterly 1.92 feet.

Statement of evidence relative to this corner location is on back of page. 329230

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
David S. Landecker

Date 6/10/91 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:15 P. .M. on the 11 day of June A.D., 1991

County Recorder Claudine Kayler

By Ms, Deputy

DOCUMENT NO. 329230

Statement of Evidence:

Point on Line between Sections 22 and 27,  
Township 140 North, Range 27 West, Cass County,  
Minnesota

R15-16

On May 24, a Landecker & Associates of Walker, Inc. survey crew set a 2 inch square county tubular monument with stamped aluminum cap. This monument was set on the line between Sections 22 and 27 which has been determined to run between the Northeast and Northwest corners of Section 27. The point on line is distant 1940.11 feet westerly of said Northeast corner and 3349.47 feet easterly of said Northwest corner. This monument is intended to provide local survey control. Bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.