

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 15, Township 138, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 2/6/92 placed a 1/2 inch iron pipe monument
DATE

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

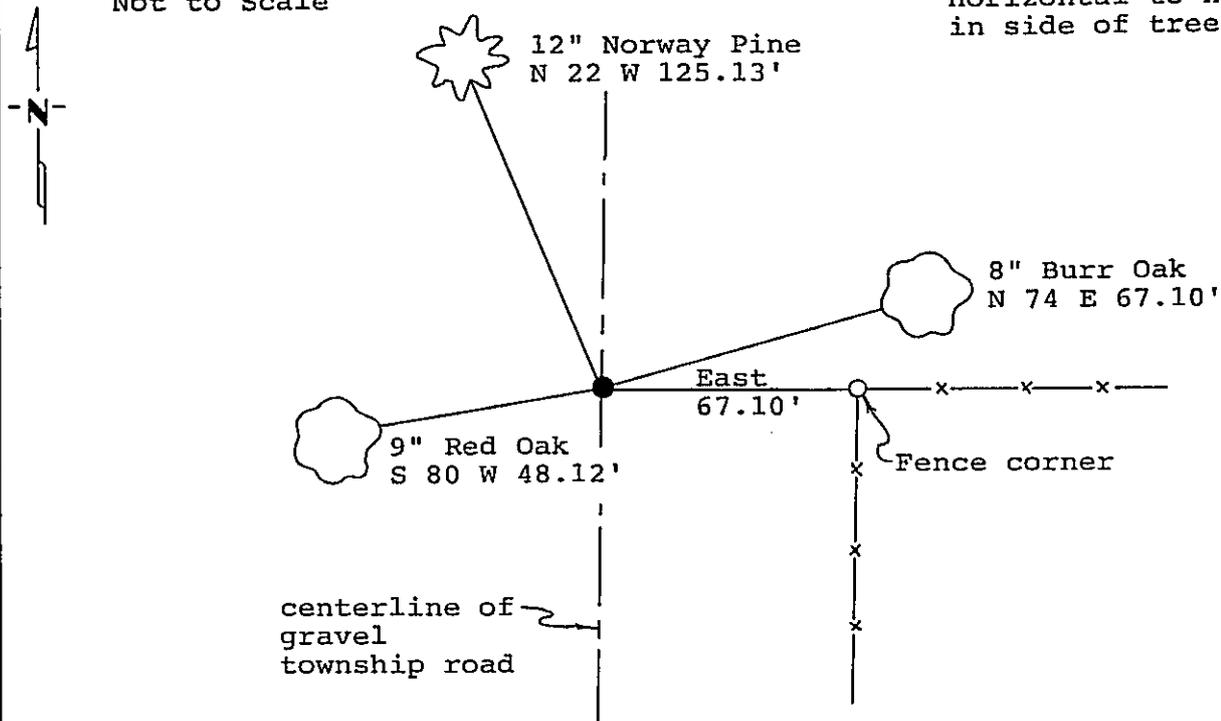

Statement of evidence relative to this corner location is on back of page. 336059

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 3/10/92 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:00 P.M. on the 20 day of March A.D., 1992

County Recorder Clondine Kayler
By m s, Deputy

DOCUMENT NO. 336059

Statement of Evidence:

East Quarter corner, Section 15, Township 138 North,
Range 30 West, Cass County, Minnesota

L - 17

1865 George B. Wright and Thomas B. Walker, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 138 North, Range 30 West. The notes indicate that he set a wood post and marked the following bearing trees: a 10 inch Norway Pine South 53 degrees West a distance of 68 links; and a 22 inch Norway Pine North 25 degrees East a distance of 126 links.

1992 on February 3, a Landecker & Associates, Inc. survey crew found no monument in place. The corner was determined lost and set proportionally on a straight line and split between the Northeast and Northwest corners of said Section 15. On February 6, 1992, Landecker & Associates, Inc. set a 1/2 inch iron pipe at said corner position. New bearing trees were marked as shown on front of this certificate.