

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SOUTH QUARTER Corner of Section 32, Township 136, Range 29, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1/23/91 placed a CAPPED 1/2" IRON PIPE 2" BELOW ROAD SURFACE,
DATE
MARKED BY REGISTRATION NO. 17008.

SKETCH OF REFERENCE TIES

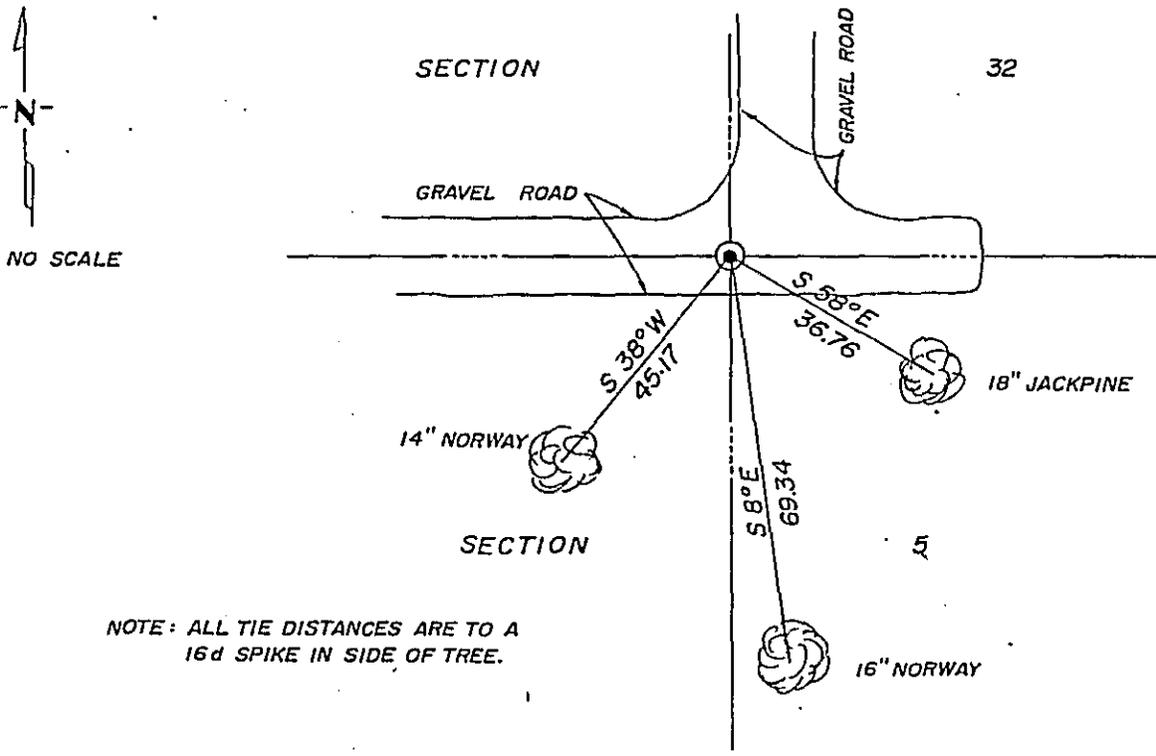

NOTE: ALL TIE DISTANCES ARE TO A 16d SPIKE IN SIDE OF TREE.

Statement of evidence relative to this corner location is on back of page. 336117

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

[Signature]
 Date 3/14/91 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:00 P.M. on the 24 day of March A.D., 1992
 County Recorder [Signature]
 By [Signature] Deputy
 DOCUMENT NO. 336117

Statement of Evidence:

South Quarter Corner

In 1858 the United States of America Government Land Office surveyed, established and set a post at the quarter corner position.

In September, 1977 Landecker & Associates, Inc. survey crew establish and set a 3/4 inch iron at the quarter corner position by obliterated methods for the plat of TUOMIS PINE ACRES in Section 5, Township 135 North, Range 29 West.

In January, 1991 Landecker & Associates, Inc. survey crew finds 3/4 inch iron destroyed and re-establish position by setting a 1/2 inch capped iron pipe from ties taken during the 1977 survey.