

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West Quarter Corner of Section 6, Township 134, Range 32, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On Nov. 20, 1988 ^{DATE} set a 3/8" iron pin down 0.8'±

left monument as found, lowered monument, removed monument (explain)

On Mar. 22, 1988 ^{DATE} set a 1/2" iron pipe monument capped RLS No. 16097

SKETCH OF REFERENCE TIES

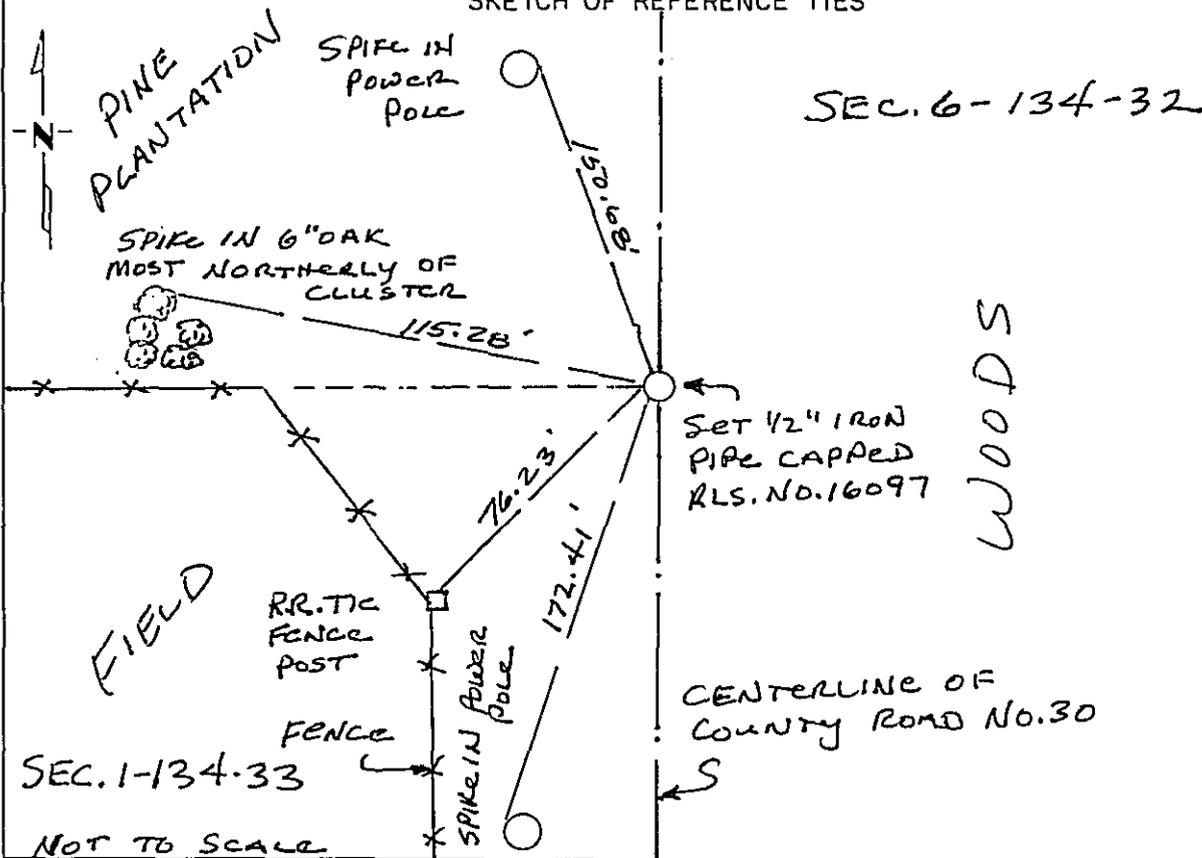

Statement of evidence relative to this corner location is on back of page. 343239

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] Nov. 16, 1992
SIGNATURE DATE

Registration No. 16097

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:45 P. M. on the 24 day of November A.D., 1992

County Recorder Claudia Kayler
By MJ, Deputy

DOCUMENT NO. 343239

Statement of Evidence:

The West Quarter Corner of Section 6, Township 134, Range 32, 5th Principal Meridian, Cass County, Minnesota, was set in 1858 under the Public Land Survey as a post with 2 bearing trees. No evidence of the post or bearing trees was found.

A search of County records revealed no additional data.

In 1991 and 1992, while subdividing Section 6, Thomas P. Thiessen, RLS No. 16097, found a 3/8" iron pin down 0.8' \pm at the intersection of the centerline of County Road 30 with the extension east of an old fence. A check of Distances north and south verifies this position for the West Quarter Corner of Section 6. A 1/2" iron pipe capped RLS No. 16097 was placed over the found pin.