

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 20, Township 141, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 7/29/92 found remains of all four original Pine stumps
DATE

left monument as found, lowered monument, removed monument (explain)



On 7/30/92 placed a 2 inch by 48 inch iron pipe with brass cap
DATE

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

Monument Stamped:
 T141N R31W
S17/S16
S20/S21
 1992
 RLS 21367

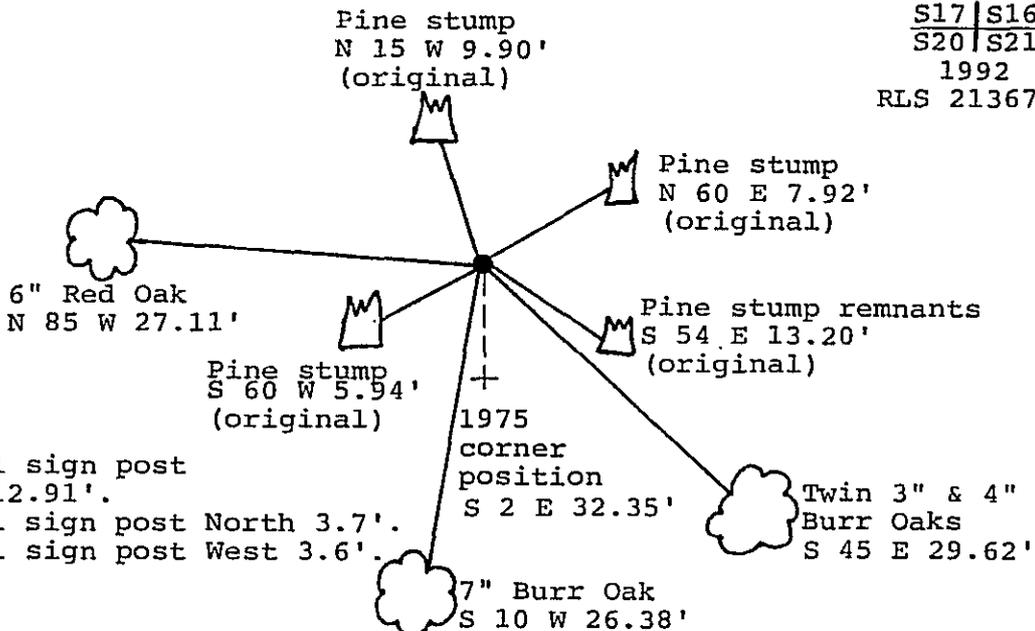

8' Steel sign post N 45 E 12.91'.
 8' Steel sign post North 3.7'.
 8' Steel sign post West 3.6'.

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 343557

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 12/8/92 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 3:10 P. M. on the 8 day of December A.D., 1992
 County Recorder Christine Koyler
 By me, Deputy
 DOCUMENT NO. 343557

Statement of Evidence:

Northeast corner, Section 20, Township 141 North,
Range 31 West, Cass County, Minnesota

N-9

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 31 West. The notes indicate that he set a wood post and marked the following bearing trees: a 6 inch Norway Pine North 15 degrees West a distance of 15 links (9.90 feet); a 9 inch Jack Pine South 60 degrees West a distance of 9 links (5.94 feet); a 10 inch Norway Pine North 60 degrees East a distance of 12 links (7.92 feet); and a 6 inch Norway Pine South 54 degrees East a distance of 20 links (13.20 feet).

1962 on May 2, United States Forest Service notes for Township 141 North, Range 31 West, in Book 1, page 75, show that United States Forest Service technician R.H. McDonald searched for the corner. The notes indicate that he found no original evidence. He did find a Forest Service Locate poster from 1953 by A.C.

1975 R.F. Schneider, Licensed Land Surveyor Number 5740, searched for corner. No evidence was found of the original post or accessories. He set a spike by double proportion methods and marked the following bearing trees: a 4 inch White Oak North 60 degrees West a distance of 10.10 feet; a 5 inch White Oak North 80 degrees East a distance of 40.30 feet; and a 7 inch Red Oak North 40 degrees East a distance of 62.53 feet. The notes are in Book 37, page 50, on file in the office of Landecker & Associates of Walker, Inc....

1992 on July 29, a Landecker & Associates of Walker, Inc., survey crew search for corner. They found remains of the four original bearing trees, now Pine stumps, that fit with the original notes.

1992 on July 30, a Landecker & Associates of Walker, Inc., survey crew set a 2 inch by 48 inch iron pipe with brass cap from original Pine stump bearing tree remains in the obliterated position. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate. The 1975 R.F. Schneider corner spike is located South 2 degrees East a distance of 32.35 feet from the corner set.