

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 22 Township 140 Range 29 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On 7-8-91 found a 3" SQUARE ALUMINUM CAPPED COUNTY MONUMENT (DOWN 0.9') AND  
DATE 1.5' NORTH OF CENTER LINE E-W GRAVEL ROAD.
- left monument as found,       lowered monument,       removed monument (explain)
- On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE \_\_\_\_\_

### SKETCH OF REFERENCE TIES



NOTE:  
all tie trees (except 24" white pine)  
have a yellow county tag dated 7-24-90  
with RLS #11395.

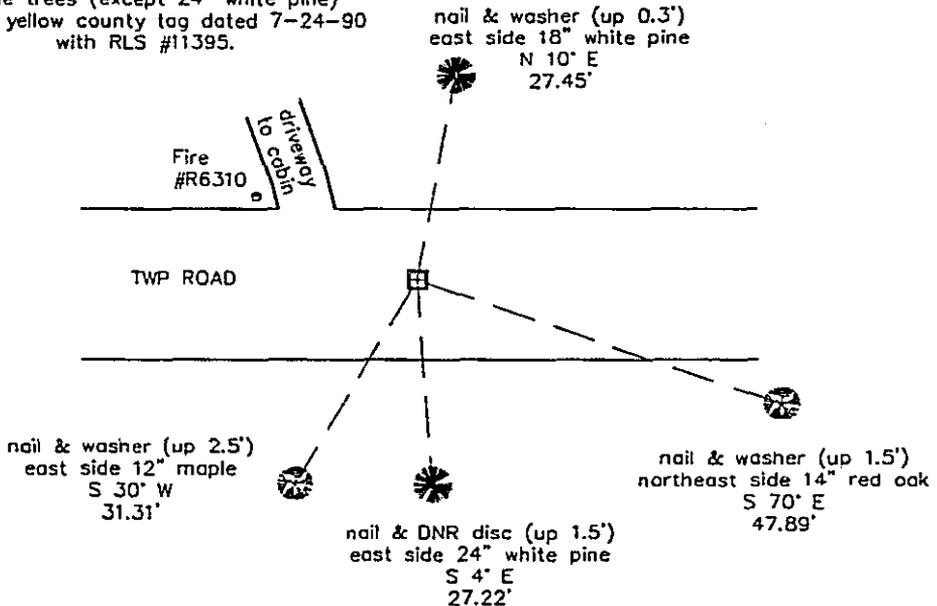

bearings observed with a compass

Statement of evidence relative to this corner location is on back of page.

8-20-91  
WMA 00355

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-26-92  
SIGNATURE DATE

Registration No. 16098

- Land Surveyor,       Professional Engineer
- County Surveyor,       County Engineer

343675  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 3:15 P. .M. on the 10 day of December A.D., 19 92  
County Recorder Claudia Kaylor  
By (M) Deputy  
DOCUMENT NO. 343675

Northeast Corner Section 22, Township 140 North, Range 29 West

The DNR Bureau of Engineering contacted the following for survey information:

Minnesota Secretary of State's Office  
Cass County Surveyor's Office  
Gary Stevenson, RLS, Walker, MN  
Walt Curo, RLS, Hackensack, MN  
Roger Mustonen, RLS, Hackensack, MN

- 1870 This corner was established by the U.S. General Land Office marked with a post and witnessed by the following bearing trees:  
Basswood, 5" North 50° East, 10 links (6.6')  
Maple, 5" North 22° West, 49 links (32.34')  
Maple, 5" South 64° West, 51 links (33.66')  
Maple, 12" South 35° East, 35 links (23.10')
- 1919 E. B. Horst conducted a survey of Section 15, Township 140 North, Range 29 West as recorded in Book D on page 32. The record shows that Horst set a stake from the standing north west bearing tree and stumps of the other bearing trees.
- 1919 May, A map of the resurvey of Section 15 conducted by E. B. Horst, Deputy County Surveyor, shows this corner to be a 2-1/2" x 30" iron monument set from government bearing trees. Said map is recorded as document "B-25".
- 1922 February, The plat of END O' THE TRAIL, SECOND ADDITION as surveyed by Egan, Field and Nowak and recorded as document "D-88" shows this corner to be an iron monument in the center line of Tecumseh Drive.
- 1922 August, The plat of END O' THE TRAIL, THIRD ADDITION as surveyed by Egan, Field and Nowak and recorded as document "D-89" shows this corner to be an iron monument located in the center line of Tecumseh Drive.
- 1926 A resurvey by John Greene recorded as document "E-25" indicates that this corner is an iron monument.
- 1981 G. H. Stevenson, RLS, found a 2" iron pipe in the center line of an east-west road. Three new ties were taken:  
R. Oak, 14" South 70° East, 47.95'  
W. Pine, 18" North 10° East, 27.35'  
Maple, 12" South 30° West, 31.36'
- 1982 August, A field crew of the Department of Natural Resources, Bureau of Engineering found a 2" iron pipe down 0.2', 1.5' north of the center line of an east-west road, with the three county ties in place.
- 1991 July, A county monument was found in place of the 2" iron pipe. The ties were checked and they agree with the ties taken in 1982. The county monument is accepted as the section corner.