

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 26, Township 140, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7-9-91 found a 1" SQUARE IRON (DOWN 0.2')
DATE
- left monument as found, lowered monument. removed monument (explain)
- On _____ Placed a _____
DATE

SKETCH OF REFERENCE TIES

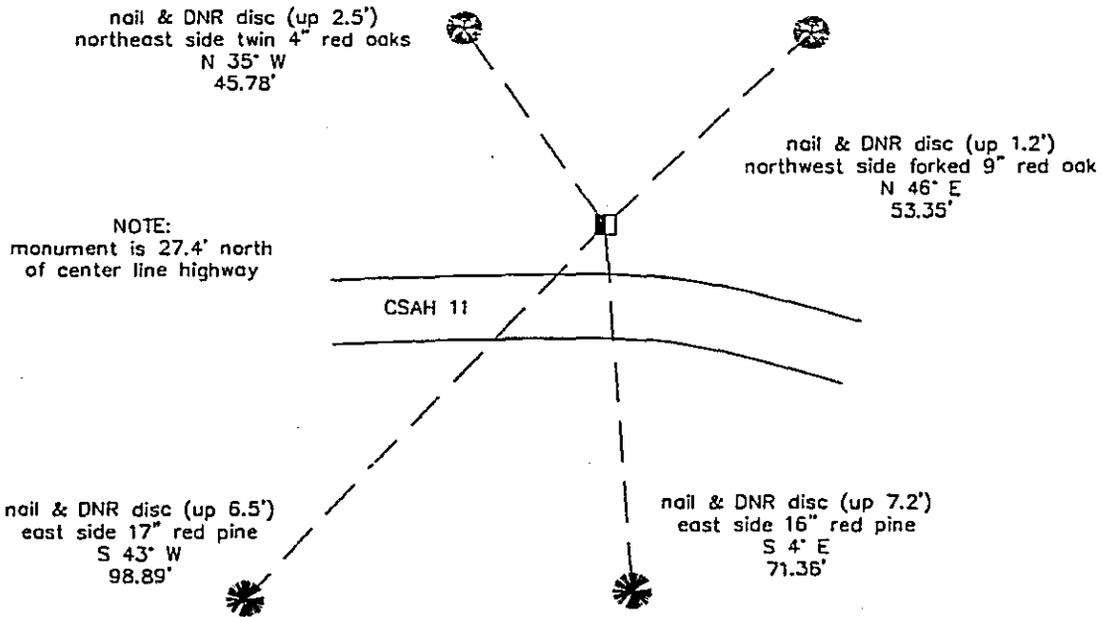

bearings observed with a compass

Statement of evidence relative to this corner location is on back of page. 8-21-91
WMA 00355

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-26-92
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. recorders office at 3:50 P. .M. on the 10 day of December A.D., 1992
County Recorder Clara Kayla
By m Deputy
DOCUMENT NO. 343682

Northeast Corner Section 26, Township 140 North, Range 29 West

The DNR Bureau of Engineering contacted the following for survey information:

Minnesota Secretary of State's Office
Cass County Surveyor's Office
Gary Stevenson, RLS, Walker, MN
Walt Curo, RLS, Hackensack, MN
Roger Mustonen, RLS, Hackensack, MN

- 1870 This corner was established by the U.S. General Land Office marked with a post and witnessed by the following bearing trees:
Norway Pine, 14" North 42° West, 20 links (13.20')
White Pine, 8" North 83° East, 37 links (24.42')
Norway Pine, 12" South 73° West, 34 links (22.44')
Norway Pine, 8" South 35° East, 32 links (21.12')
- 1936 April, Field notes of John W. Curo show an iron pipe at this corner, being 384.3 feet north of MC No. 6, and 5524 feet west of the southeast corner of Section 24. Original distances were 396 feet and 5305.08 feet.
- 1940 John Curo in Book "D", page 254-255, shows a 2" by 20" iron pipe.
- 1960 June, A field crew of the Department of Natural Resources, Bureau of Engineering (hereinafter referred to as the DNR-BOE), found an iron pipe in place.
- 1966 R. F. Schneider found a 1" square iron bar in place and took four ties.
- 1981 County Surveyor, G. H. Stevenson found a square iron monument.
- 1982 August, A field crew of the DNR-BOE found a 1" square iron flush with the ground, on a ditch slope, 27.4 feet north of center line of CSAH 11. Distances of 396 +/- and 5511.26 were measured to M.C. #6 and the southeast corner Section 24.
- The square iron is accepted as the section corner.
- 1991 Ties were taken as shown on the face of this certificate.