

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 12, Township 134 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8-24-93 Placed a 3/4" x 24" REBAR WITH ALUMINUM CAP STAMPED
DATE
"DNR SURVEY MARKER", UP 0.2'

SKETCH OF REFERENCE TIES



NOTE:
MONUMENT IS
IN CL OF SWAIL

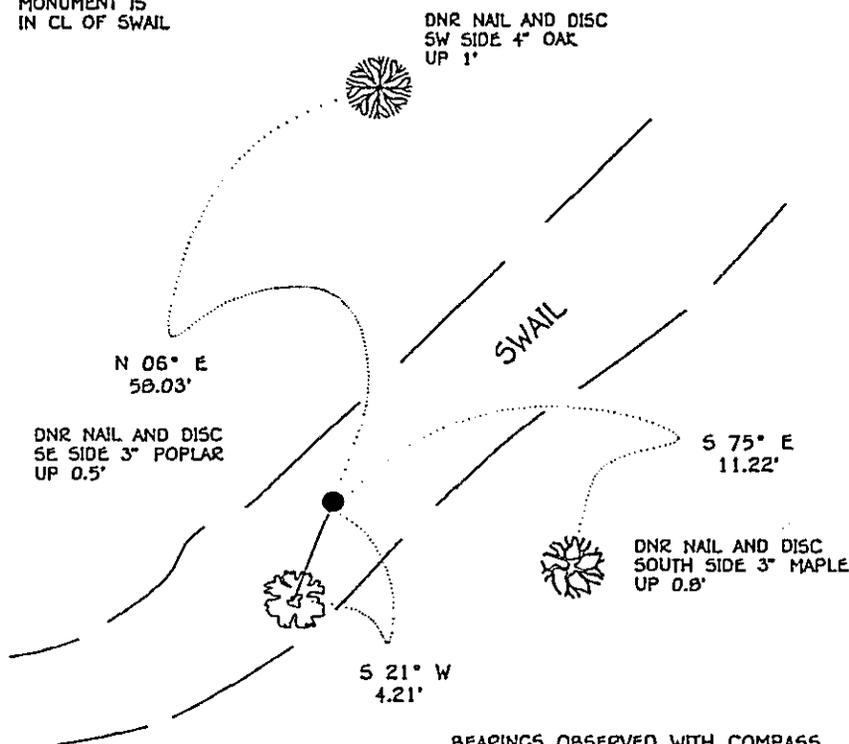

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

J.B.M. SEPT 1993
SFT00039.05.00.01

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Russell R. Pommeroy 10-7-93
SIGNATURE DATE

Registration No. 17005

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 351910
County of CASS

I hereby certify that this document was filed in the Co. recorders office at 4:10 P.M. on the 14th day of OCTOBER A.D., 1993
County Recorder Claudine Kaylar
By N.B., Deputy
DOCUMENT NO. 351910

East Quarter Corner Section 12, Township 134 North, Range 30 West

The DNR Bureau of Engineering contacted the following offices for information on this corner:

MN Secretary of State

Cass County Recorder

Widseth Smith Nolting at Brainerd

Landecker & Associates at Pequot Lakes

1858 The U.S General Land Office notes, on file in the Secretary of State's Office show the corner is marked with a wood and marked the following bearing trees:

Pine 36° N 1/4° W 851 links, 30° Pine S 22 1/2° E 396 links

1993 August 24, the DNR Bureau of Engineering conducted a search for this corner, but found no evidence of a monument, government bearing trees or occupation. Computed the lost position for this corner and found it to measure:

2627.64 ft. from adjoining section corners

Searched again at the lost position but found nothing.

Analysis of the available information led the DNR Bureau of Engineering to conclude that the lost position should be used for the corner as no records exists to indicate that this corner was ever perpetuated.