

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 11, Township 134 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7-26-93 Placed a 1 1/4" x 54" IRON PIPE, UP 18" ABOVE WATER SURFACE
DATE (18"+/- DEEP)

SKETCH OF REFERENCE TIES

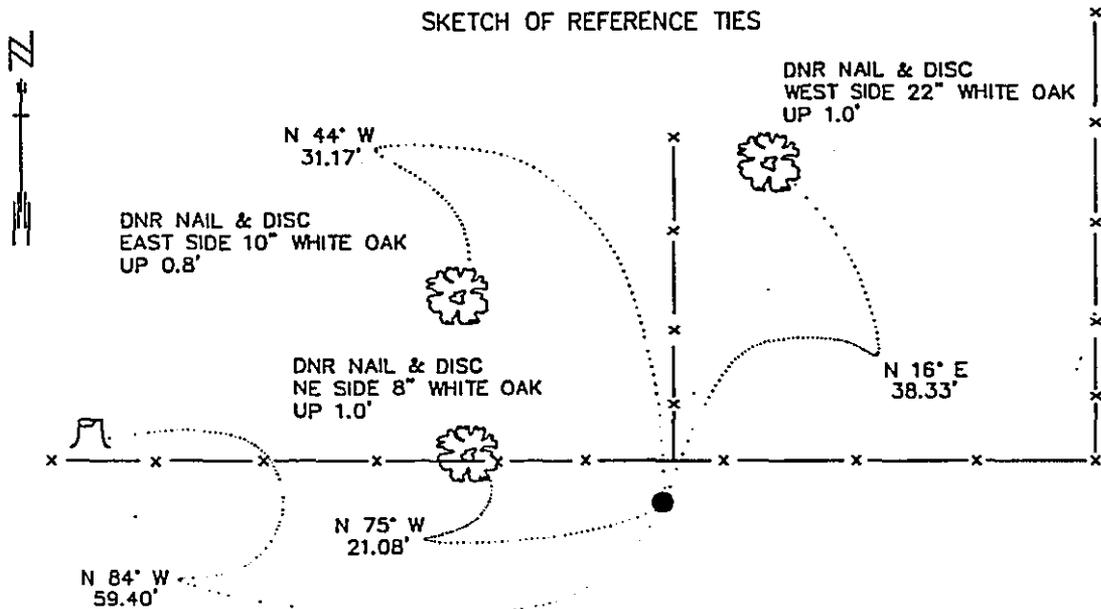

NOTE:
MONUMENT IS
4.5' SOUTH OF NEW E-W FENCE
44' WEST OF NEW FENCE LINE NORTH
1.2' WEST OF OLD DOWN FENCE NORTH

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

SFT00039.04.00.01
J.B.M. AUG. 1993

I hereby certify that this document and the data contained herein was prepared by me or under (my direct supervision.

Lowell R. Pomeroy SIGNATURE 8-25-93 DATE

Registration No. 17005

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of CASS

351994

I hereby certify that this document was filed in the Co. recorders office at 10:30 A.M. on the 18th day of OCTOBER A.D., 1993

County Recorder Claudia Kaylar
By N.B. Deputy

DOCUMENT NO. 351994

North Quarter Corner Section 11, Township 134 North, Range 30 West

The DNR Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Cass County Highway Engineer

1868 The U.S. General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and marked the following bearing trees:
N. Pine 9" N 13° E 37 lks., N. Pine 18" N 76 1/2° W 90 lks.

1993 July 26, the DNR Bureau of Engineering conducted a search for this corner and found a 22" pine stump 18" high with a very definite blaze on its southeast side. No scribing could be found. No other evidence of the corner could be found. Located the existing occupation in the area which consisted of newer fence lines north and west. Contacted the area land owner, a Mr. Schnieder, who stated he compassed and taped from the west quarter corner Section 2, east 2640 ft. and then south 2640 ft. to set the new fence lines.

Computed a location for this corner on a straight line between adjoining section corners and government distance, 90 lks, from the found pine stump. Searched at this location for further evidence and found a very old down fence to the north of this computed location. Computed location was found to measure:

2652.96 ft. from the northeast corner Section 10

2664.38 ft. from the northeast corner Section 11

Analysis of the available information led the DNR Bureau of Engineering to conclude that the found pine stump is the government bearing to the northwest of this corner and accept the computed location derived from it as stated above.