


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 19, Township 141N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12/22/93 placed a 2½" diameter by 24" long galvanized iron pipe with a 3" diameter brass cap, top of monument 14" below road surface.

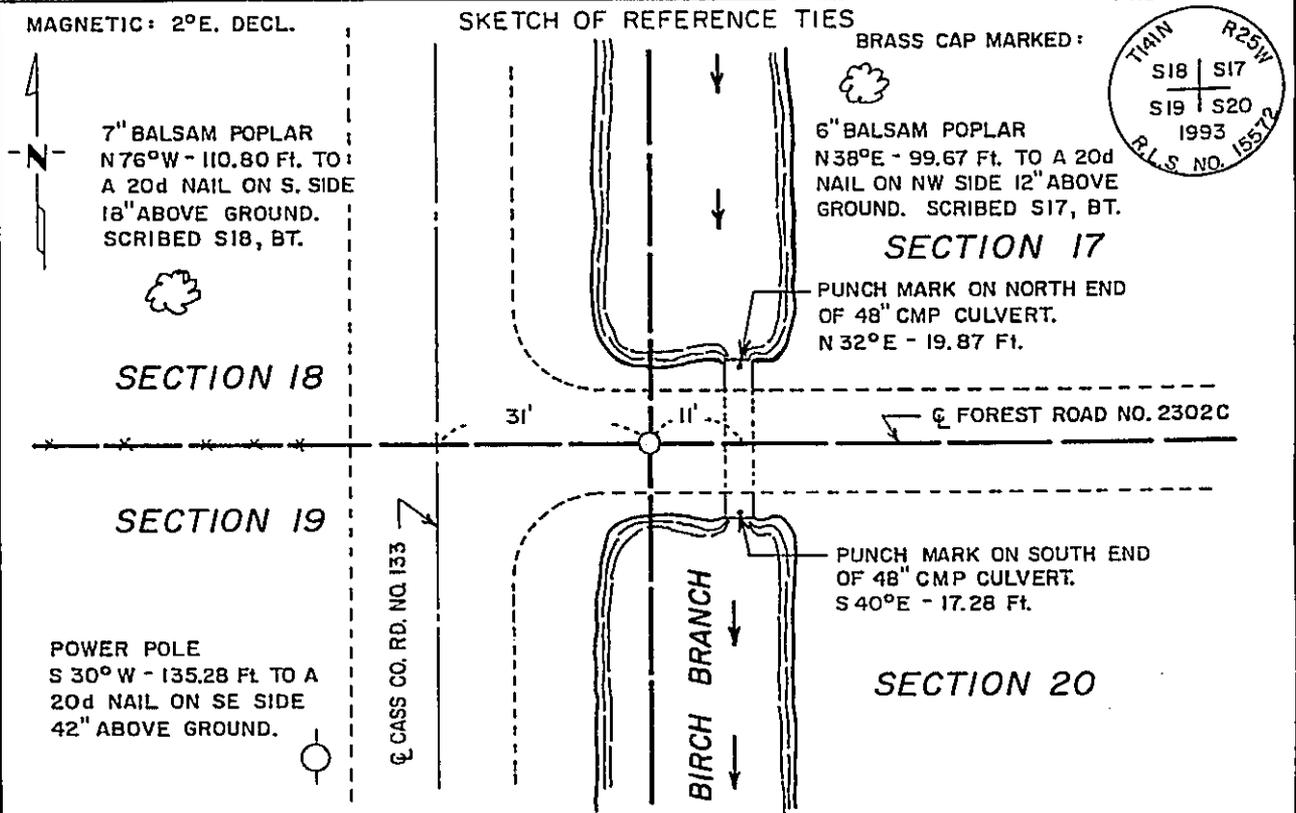

ALL DISTANCES ARE HORIZ. AND TEMP. CORRECTED.
 ALL TREES MARKED WITH RED ENAMEL PAINT AND WITH A 54-3 (BEARING TREE) TAG.

Statement of evidence relative to this corner location is on back of page. 355094

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Lowell J. Schellack

Date 1/17/94 Registration No. 15572

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 11:20 P.M. on the 2nd day of February A.D., 1994

County Recorder Claudine Kaylar
 By N.B., Deputy

DOCUMENT NO. 355094

Statement of Evidence:

NORTHEAST CORNER OF SECTION 19, TOWNSHIP
141 NORTH, RANGE 25 WEST OF THE FIFTH
PRINCIPAL MERIDIAN.

The original public land survey was run in 1871 by Walker, Allen and Putnam. A post was set to mark the corner and four bearing trees were marked and recorded as accessories: An 8" Dia spruce that bears N24°E - 5 links (3.30 ft.); a 10" Tamarac that bears S30°E - 27 links (17.82 ft.); a 10" Cedar that bears S25°W - 43 links (28.38 ft.); and a 6" Tamarac that bears N18°W - 14 links (9.24 ft.). The notes of this survey are on file in the office of the Secretary of State, St. Paul, MN.

On May 29, 1920, Curo, title unknown, was at the corner and found a 6" cedar that bears S61°W - 26.8 ft. On June 4, 1920, Curo set an iron pipe 2½ feet long by 3 in. diameter with a cap stamped S 17 18 19 20 with 2 60d spikes in bottom of pipe. Curo notes and USFS Corner Restoration Book No. 2, page 34. (On file at the Chippewa National Forest, Cass Lake, MN)

In ~~1920~~¹⁹²⁰, Ben Clark, Cass County Surveyor, went to the ¼ corner common to sections 17 and 20 and ran west and at 1320 feet set a temporary 1/16 corner; at 2625.5 ft. intersected a brook; at 2652 feet leave a bridge; at 2642.7 ft. found a 6" dia. cedar, S61°13'W - 26.8 ft. from the corner and found an old Tamarac for the south B.T. Set a hub in side of field on west side of ditch 12.0 ft. from bridge. Cass County Survey Book C, pages 543, 544, and 545 (map of section with dimensions) and USFS Corner Restoration Book No. 2, page 34. (On file at the Chippewa National Forest, Cass Lake, MN)

In the 1930's the CCC's were at the corner. They indicate the section corner found and the original Tamarac B.T. N43°W - 20 links to corner. A drawing of Section 17 was included with the notes showing the distances between corners. CCC Book No. 1, page 17. (On file at the Chippewa National Forest, Cass Lake, MN)

In ^{circa} 1940 there was a ^{unsigned} record made of a found B.T. to this corner. (Tam. stamp 2' high 11' Dia, S43°E 20 LKS)
The B.T. is 5 or 6 ft. south of a handrail. Has been scarred and only B.T. is visible. USDA Corners of the Public Survey, Form 874,
#N-5 on file at the Chippewa National Forest, Cass Lake, MN.

On October 19, 1993, Lowell Schellack, Land Surveyor, Tom Miller, Party Chief, and John Larson, Survey Aide, all of Schellack Engineering and Land Surveying, were at the corner. A search was conducted for the corner and the accessories at the intersection of a county road at the west side of Section 17 and a low standard road at the south line of Section 17. In this area there is a 48" diameter corrugated metal pipe draining a brook on the east side of the county road. The corrugated metal pipe has apparently replaced a bridge that has been indicated in the history of this corner. No evidence of the corner or any accessories was found. The distances from the North and East ¼ corners from the Cass County 1920 survey and the 1930's CCC survey were compared.

(continued on page 4)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 19, Township 141N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12/22/93 placed a 2½" diameter by 24" long galvanized iron pipe
with a 3" diameter brass cap, top of monument 14" below road surface
DATE

SKETCH OF REFERENCE TIES



Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lowell J. Schellack 1/17/94
SIGNATURE DATE

Registration No. 15572

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

DOCUMENT NUMBER 355094
 OFFICE OF COUNTY RECORDER, HUBBARD COUNTY, MINNESOTA I hereby certify that the within instrument was filed in this office for record on February 2, 1994 at 1:20 o'clock P M., and was duly recorded in book of _____ page 355094
Claudine Keyser County Recorder
 By N.B. Deputy

Statement of Evidence:

NORTHEAST CORNER OF SECTION 19, TOWNSHIP
141 NORTH, RANGE 25 WEST OF THE FIFTH
PRINCIPAL MERIDIAN.

The distances from the South $\frac{1}{4}$ corner to the SW corner S17 for the County and the CCC surveys were 2642.6 and 2642.64 ft. respectively. The distances from the West $\frac{1}{4}$ corner to the SW corner - S17 for the county and the CCC surveys were 2691.8 and 2684.88 ft. respectively. A distance-distance intersect was computed for both the county and the CCC surveys and a temporary stake was set for each. Both stakes fell to the east of the County road on the low standard road at the south line and 11 ft. west of the centerline of the 48" corrugated metal pipe. The east edge of the brook was found to be 2622 ft. from the South $\frac{1}{4}$ corner compared to 2625.5 feet recorded in the county notes. The west edge of the brook was found at 2652 feet from the south $\frac{1}{4}$ corner compared to a distance of 2652 from the South $\frac{1}{4}$ corner that the county shows leaving a bridge which would indicate the approximate edge of the brook. An east-west fallen down fence was found on the west side of the county road that lines up almost exactly with the position of the CCC temporary stake for the corner. It is also noted that the CCC position is almost in the center of the low standard road to the east. It is also noted that the distances from the South $\frac{1}{4}$ corner to the SE corner Section 17 correlate closely between the county survey, the CCC survey, and this survey being 2571.6 ft., 2571.36 ft., and 2571.54 ft. respectively. After making a review of all the above information, it was decided that the distance-distance intersection of the 1930's CCC survey best represents the original position of this corner.

For additional information, contact the Cass County surveyor's office in Walker, Minnesota.