


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner Corner of Section 6, Township 145, Range 31, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 2/3/94 found a 1 1/2" capped pipe 8' from shore line
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

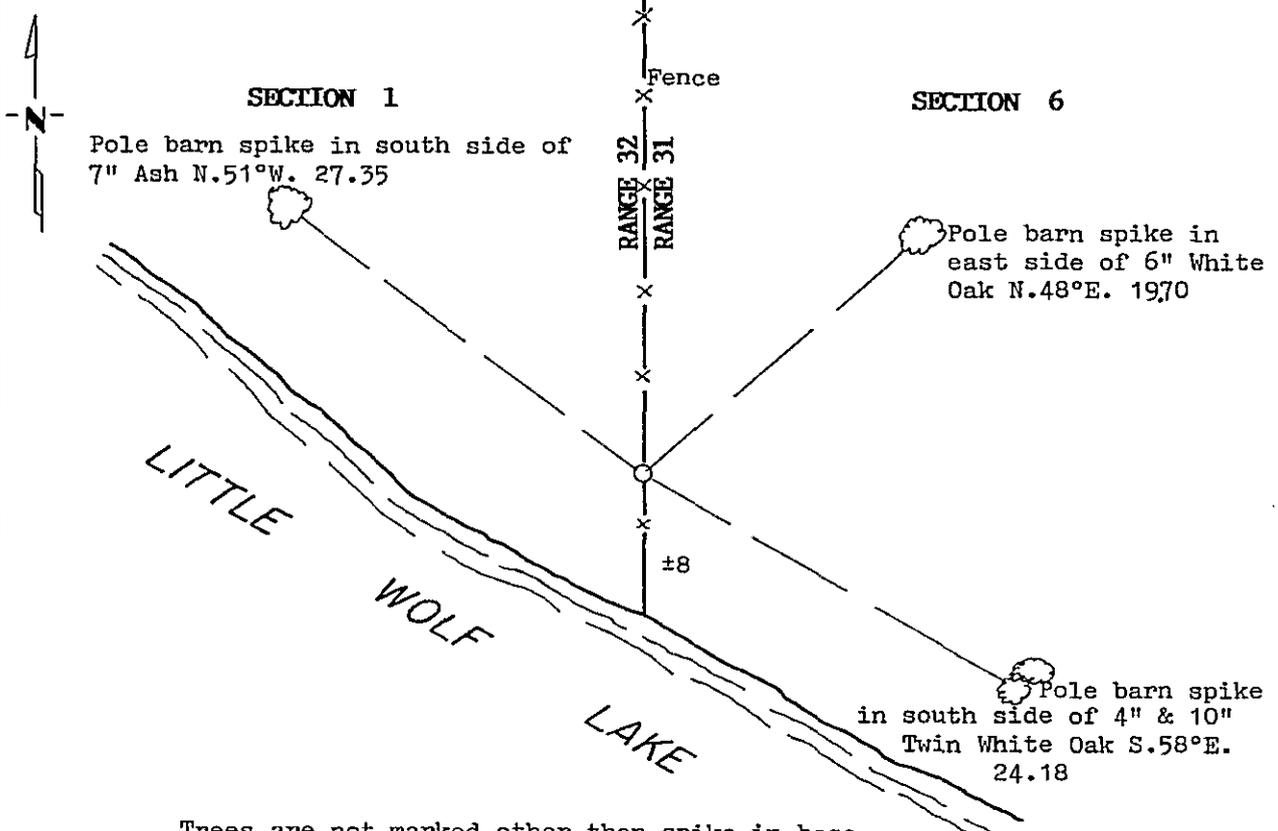

Trees are not marked other than spike in base.

Statement of evidence relative to this corner location is on back of page.

357107

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert W. Munson
 Date 3-28-94 Registration No. 15483

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 11:20 A.M. on the 26th day of APRIL A.D., 1994

County Recorder Claudine Kayler
 By N.B. MICROFILM, Deputy
 DOCUMENT NO. 357107

Statement of Evidence:

MEANDER CORNER ON WEST LINE OF SECTION 6, TOWNSHIP
145 NORTH, RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN

- 1871 The original Public Land Survey was run by George Stuntz. A scribed post was set to mark corner and witness ties were recorded:
8" Black Pine N. 55° W. 18 links
10" Yellow Pine S. 70° E. 37 links
- 1946 E. Wilsie found iron and Jack Pine bearing tree and used for meander corner. (Survey Book B, page 470, Hubbard County Surveyor's Office)
- 1958 Harold Curo surveyed plat of LITTLE WOLF SHORES and indicates iron monument at meander corner.
- 1992 Murray Surveying, Inc., found stamped 1 1/2" iron pipe and accepted the existing monument as the meander corner.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.