


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 19, Township 145, Range 31, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10/25/93 found a 3/4" Capped pipe, R.L.S.6807, under bituminous.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/25/93 placed a Mn/DOT Cast Iron Monument. Top of monument flush
DATE
with highway surface.

SKETCH OF REFERENCE TIES

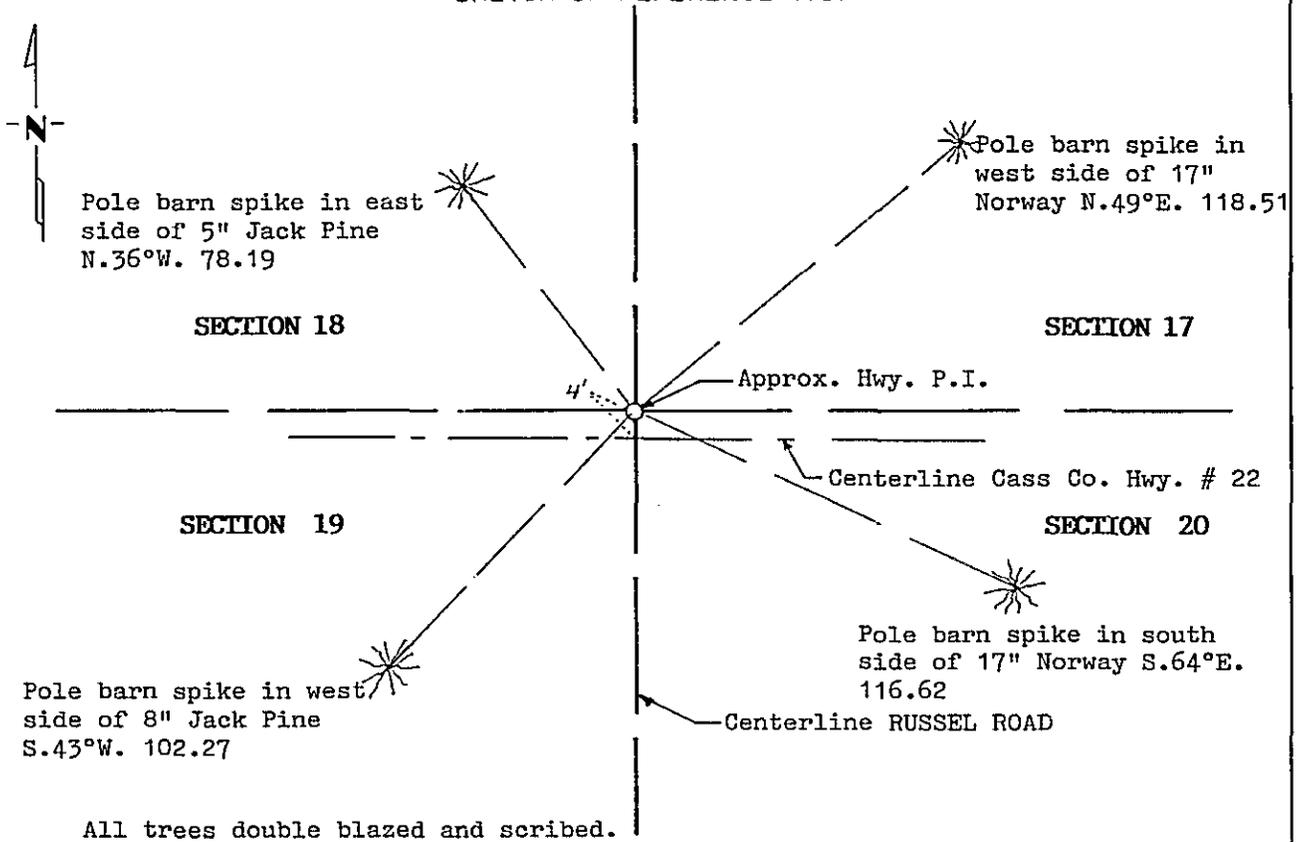

Statement of evidence relative to this corner location is on back of page. 357128

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roberts W. Murray
 Date 3-28-94 Registration No. 15483

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P. M. on the 26th day of APRIL A.D., 19 94

County Recorder Claudine Kaylar
 By N-6 MACROFILM, Deputy
 DOCUMENT NO. 357128

Statement of Evidence:

**NORTHEAST CORNER SECTION 19, TOWNSHIP 145 NORTH,
RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN**

- 1875** The original Public Land Survey was run by Benjamin C. Baldwin. A scribed post was set to mark corner and witness ties were recorded:
- 7" Jack Pine N. 61° E. 35 links
 - 7" Jack Pine N. 36° W. 22 links
 - 10" Jack Pine S. 84° W. 17 links
 - 10" Jack Pine S. 62° E. 14 links
- 1963** Jack Salo, RLS, found no evidence of corner and set spike at intersection of road center lines and witness ties as follows:
- 6" Jack Pine Southwest 70.51 feet
 - Power Pole Northwest 49.39 feet
 - Tele. Pole Southeast 41.16 feet
- 1982** Okerman Surveying, Inc., found spike set by Salo under road surface and his northwest and southwest ties. Okerman set 3/4" capped iron pipe, RLS 6807 and new witness tie.
- 10" Jack Pine S. 20° E. 53.21 feet
- 1992** Murray Surveying, Inc., found 3/4" capped iron pipe, RLS 6807 and Salo's southwest bearing tree, all other ties gone. Accepted found monument as the northeast corner of Section 19.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.