

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 22, Township 141, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/19/94 placed a 2 inch by 24 inch iron pipe with brass cap
DATE and plastic base up 8 inches in rock pile.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.
MONUMENT STAMPED
T141N R27W
S22+S23
1994
RLS No. 21367



8' steel sign post
South 2.9 feet.

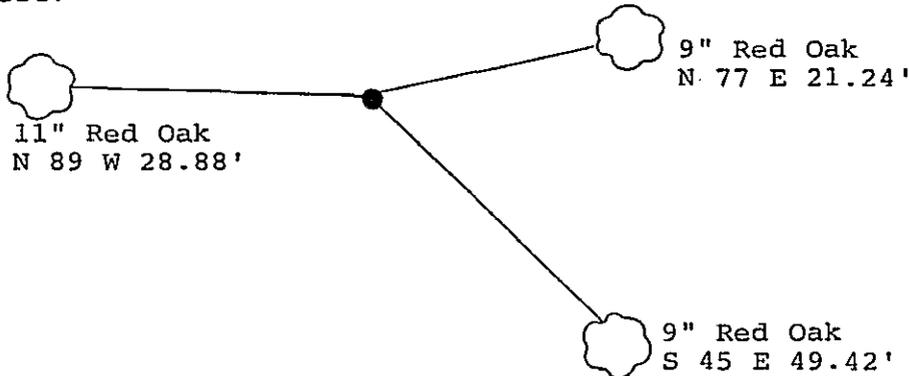

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

357304

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
Terry L. Freeman
Date 5/4/94 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 9:00 A.M. on the 4th day of MAY A.D., 1994

County Recorder Claudine Kaylar
By N.B. MICROFILM, Deputy
DOCUMENT NO. 357304

Statement of Evidence:

East Quarter corner, Section 22, Township 141
North, Range 27 West, Cass County, Minnesota

P-17

1874 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 27 West. The notes indicate that he set a wood post and marked the following bearing trees: an 8 inch Oak North 80 degrees West a distance of 30 links (19.80 feet); and a 9 inch Poplar South 40 degrees East a distance of 33 links (21.78 feet).

1920 Cass County Surveyor's Office Record Book "C", Page 378, shows a survey by Lincoln Mackey. The notes indicate that he found the original corner and one original bearing tree: a 16 inch Black Oak North 80 degrees West a distance of 20 feet. He located this corner to set the Northeast corner of Section 27 by double proportion methods.

1994 on March 16, a Landecker & Associates, Inc. survey crew search for original corner evidence, but found nothing. On April 19, a Landecker & Associates, Inc. survey crew along with United States Forest Service personnel searched for original corner evidence, but found nothing. On April 19, a Landecker & Associates, Inc. survey crew set a 2 inch by 24 inch iron pipe with brass cap and plastic base up 8 inches in rock pile. New bearing trees were marked and a steel sign post set as noted on front of this certificate.

This corner position was computed from the notes of the 1920 County Survey and the in place monuments used in that survey and found in this survey.