

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to
 Meander Corner #16 Corner of Sections 26/27, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/14/94 placed a 2 inch by 48 inch iron pipe with brass cap
DATE
 up 14 inches.

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES
 Sec. 27 ¼ Sec. 26

All distances are
 horizontal to nail
 in side of tree

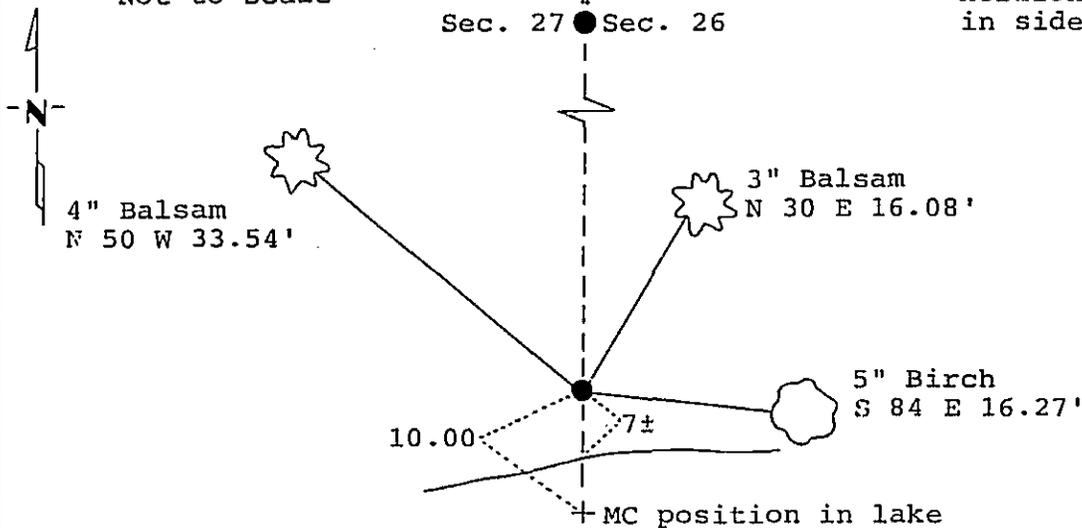

Monument is located
 7'± from shore of Lower
 Trelipe Lake.
 8' steel sign post South 4.0'.

MONUMENT STAMPED:
 WCMC
 10.00 ft. N. of MC
S27/S26
 1994
 RLS No. 21367

All bearing trees are scribed, painted
 with red enamel and marked with a
 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

357313

I hereby certify that this survey, plan or
 report was prepared by me or under my
 direct supervision and that I am a duty
 Registered Land Surveyor under the laws
 of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 5/4/94 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in
 the Co. Recorders office at 10:30 A. M. on the
4th day of MAY A.D., 19 94

County Recorder Claudine Kaylan
 By N.O. WICROFILM, Deputy
 DOCUMENT NO. 357313

Statement of Evidence:

Witness to Meander corner Number 16, Sections 26 and 27,
Township 141 North, Range 27 West, Cass County, Minnesota

UV-17

1874 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 27 West. The notes indicate that he set a wood post and marked the following bearing trees: a 6 inch Fir North 13 degrees West a distance of 11 links (7.26 feet); and a 6 inch Poplar South 64 degrees East a distance of 19 links (12.54 feet).

1920 Cass County Surveyor's Office Record Book "C", Page 378, shows a survey by Lincoln Mackey. The notes indicate that he chained North from corner.

1940 Civilian Conservation Corps on Form 874 on file in the United States Forest Service office in Cass Lake, Minnesota, shows a survey by R.T. DeFant. The notes indicate that he found an Aspen stump North 13 degrees West a distance of 11 links (7.26 feet) and placed a Forest Service Location Poster on a 6 inch Birch South 15 degrees West a distance of 20 links (13.2 feet).

1968 United States Forest Service notes for Township 141 North, Range 27 West, on file in United States Forest Service office in Cass Lake, Minnesota, in Book 2, Page 37, show that United States Forest Service Surveyor, William Okerman, found a stump for the original 6 inch Fir North 13 degrees West a distance of 7.3 feet and also found a car axle now marking the corner position. They set a 6 inch by 5 foot cylindrical, concrete monument with a 3 inch stamped bronze tablet and marked the following bearing trees: a 10 inch Elm North 71 degrees East a distance of 67.48 feet; a 14 inch Elm North 28 degrees East a distance of 145.65 feet; and a 10 inch Basswood North 43 degrees West a distance of 104.54 feet. They also placed a 54-4 sign on a Balsam East a distance of 1.5 feet.

1971 William Okerman, Registered Land Surveyor Number 6807, filed an "Affidavit As To Location Of Government Corner" showing the 1968 United States Forest Service information.

1977 Okerman Surveying, Bemidji, Minnesota, set spike for Meander corner position from 1968 ties.

1977 United States Forest Service notes for Township 141 North, Range 27 West, in Book 2, Page 37, show that United States Forest Service Technicians found the monument tipped over lakeshore bank and the Northwest bearing tree broken off 3 feet high. Both Northeast bearing trees were standing in good condition.

1977 United States Forest Service notes for Township 141 North, Range 27 West, on file in Cass Lake, Minnesota, and on Plat of Survey "E-72" on file in Cass County Recorder's Office, show information as in 1968 report.

1993 on December 18, a Landecker & Associates, Inc. survey crew traversed by this position. All 1968 bearing trees were found to be dead. They located the northeasterly bearing tree stumps to set a calculated position which fell in the water. Witness corner position calculated 10.00 feet north of the Meander corner position on line to East Quarter corner of Section 27.

1994 on March 14, a Landecker & Associates, Inc. survey crew set a 2 inch by 48 inch iron pipe with brass cap up 14 inches as a witness to the true meander corner. New bearing trees were marked and a steel sign post set as noted on front of this certificate.