

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander corner #5 Corner of Section 13, Township 143, Range 25, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 10/14/94 found a 1 inch iron pipe with aluminum cap up 18 inches
set for Witness corner to the Meander corner
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree

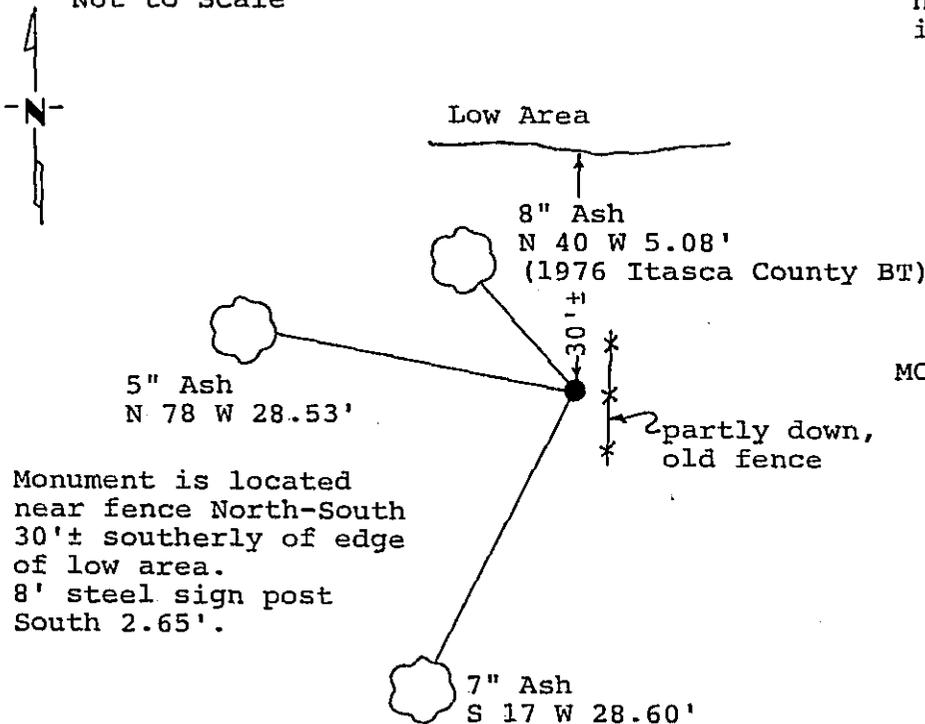

MONUMENT STAMPED:
 MC

143-25
 Sec 13
 Sec 33
 55-27
 1976

Monument is located near fence North-South 30'± southerly of edge of low area. 8' steel sign post South 2.65'.

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
 SIGNATURE

3/16/95
 DATE

Registration No. 21367

- Land Surveyor
 County Surveyor

365394

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 11:30 A.M. on the 16th day of MARCH A.D., 1995

County Recorder Claudine Kaylar

By N.S., Deputy

DOCUMENT NO. 365394

Statement of Evidence:

Meander corner Number 5, Section 14, Township 143 North, Range 25 West, 5th Principal Meridian, Cass County, Minnesota

JK-25

1867 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the east line of Township 143 North, Range 25 West. The notes indicate that he set a wood post and marked the following bearing tree: a 10 inch W. Birch South 2 degrees West a distance of 9.91 chains.

1900 U.S. Army Corps of Engineers notes in Book A1-220, Page 22 (on file in United States Forest Service Office in Cass Lake, Minnesota and on file in the Cass County Surveyor's Office) show that the original Birch bearing tree was found.

1975 in October, Itasca County Surveyor's Office notes in Loose Leaf Field Book of Township 57 North, Range 27 West on page 56 show they traversed the east line of Section 13 (west line of Township 55 North, Range 27 West). No evidence of corner was found.

1976 in January, Itasca County Surveyor's Office notes in Loose Leaf Field Book of Township 55 North, Range 27 West, on page 70 show they set a County monument on the township line for a Witness corner to the Meander corner and marked the following bearing trees: a 7 inch Elm South 61 degrees West a distance of 21.32 feet; and a 7 inch Ash North 49 degrees West a distance of 5.08 feet (tag).

1994 on October 14, a Landecker & Associates, Inc. survey crew traverse through corner and find corner marked by an iron pipe with aluminum cap and both 1976 bearing trees, the Southwest Elm is dead. On December 1, they tie out the found corner and mark bearing trees as shown and set a steel sign post as noted on front of this certificate.

Landecker & Associates, Inc. accepts the found monument as marking the east line of Section 13 on the south side of the river bottom.