

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 19, Township 134 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 5/31/94 Placed a 3/4" x 24" REBAR WITH ALUMINUM CAP STAMPED: "DNR SURVEY MARKER"  
DATE (FLUSH)

### SKETCH OF REFERENCE TIES

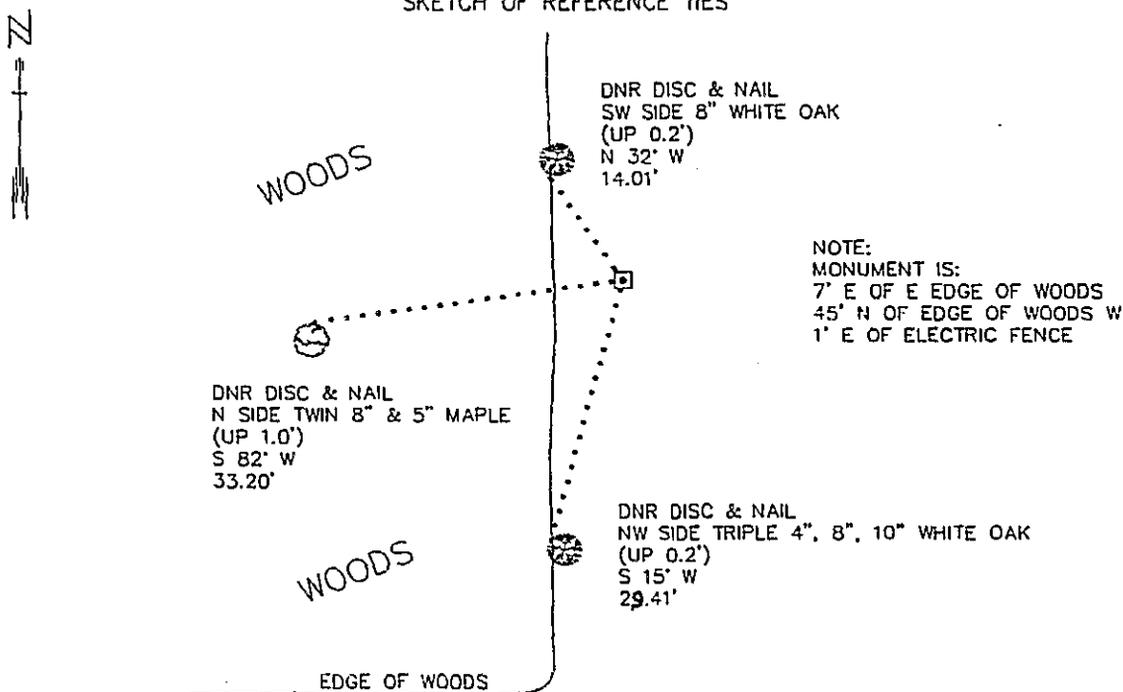

NOT TO SCALE  
BEARINGS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

DATE 8/1/94  
FILE SFT 00039

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 10-17-94  
SIGNATURE DATE

Registration No. 16098

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of CASS

375016

I hereby certify that this document was filed in the Co. recorders office at 10:20 A.M. on the 22nd day of February A.D., 1996

County Recorder Claudine Kaylar  
By N.S. Deputy

DOCUMENT NO. 375016

P-5

East Quarter Corner Section 19, Township 134 North, Range 30 West, 5th P.M.

The Department of Natural Resources, Bureau of Engineering (BOE) made the following contacts for corner information:

Minnesota Secretary of State  
Cass County Surveyors Office  
Landecker & Associates, Walker & Pequot Lakes  
Widseth, Smith & Nolting, Brainerd  
Area Landowners

1868 This corner was originally established by the U.S. General Land Office Survey. The government notes show the corner marked with a post and witnessed by the following bearing trees:

Bl. Pine 12", N 2° E, 8 links (5.28')  
Bl. Pine 11", N 17° W, 9 links (5.94')

1994 BOE computed a position for this corner by the single proportional method between the section corners north and south. The distance between the section corners is 5283.68'. A search was made at the computed position but no corner evidence was found. A DNR survey marker was set at the computed position to perpetuate the quarter corner.

For information regarding this survey, contact the Minnesota Department of Natural Resources, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029.