


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner on the west shore of Grave Lake, common to Sections 14 and 23, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

July, 1997, Northern Lights Surveying and Mapping, Inc. monumented a Witness Corner 10.000m westerly, on line, from the Meander Corner position established at record distance from the southwest corner of Section 14 and on line to the Meander Corner on the east side of Graves Lake.


SKETCH OF REFERENCE TIES & EVIDENCE

T.142N., R.26W.



NOT TO SCALE

Bearings are Grid North Minnesota Central Zone, measured with a hand compass adjusted to 3°E East declination.

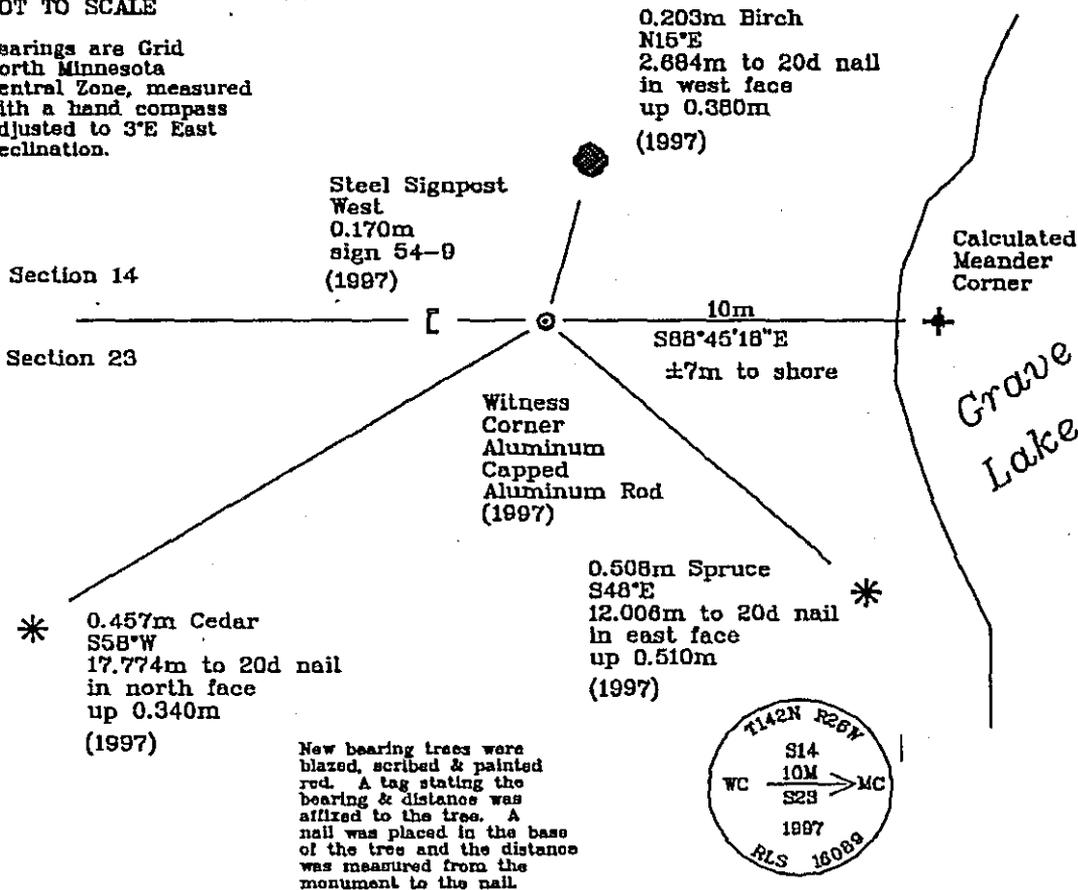

395060

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 11-16-97
LaVerne Leuelling Date

Registered Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 3:30 P .M. Date: Dec. 8, 1997
Recorder Claudine Kaylor
By K.F. Deputy
DOCUMENT NO. 395060

Statement of Evidence

Meander Corner on the west shore of Grave Lake, common to Sections 14 and 23, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1872; General Land Office (G.L.O.) survey notes; Deputy Surveyor E.W. Griffin, on his random line running east, set a wooden post for the meander corner and referenced it with the following:

8" Birch (0.203m)	8" Birch (0.203m)
S17°W	N71°W
12 Links (2.414m)	13 Links (2.815m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; handwritten copies of these notes are on file with the Cass County Surveyor's Office, Walker, Minnesota.

October, 1963; United States Department of Agriculture-Forest Service (U.S.D.A.-F.S.) Field Book #3, p.1; survey crew found an old fence line leading into the water from the west, but no other evidence; the bearing was checked from the meander corner on the east side of Graves Lake.

November, 1996; Joe Foster of Northern Lights Surveying and Mapping, Inc. established a search point and used it as a Global Positioning System (G.P.S.) session position on the west side of Graves Lake intervisible with the meander corner on the east side of the lake. A search of the area revealed no G.L.O. or subsequent evidence. In July of 1997, the crew of Foster, Smith, and Gerving established an additional G.P.S. control point to set the meander corner on the west side of Graves Lake.

July 22, 1997; Northern Lights Surveying and Mapping, Inc. crew of Smith and Gerving monumented a witness corner to the meander corner common to Sections 14 and 23, on line between the Section Corner common to Sections 14, 15, 22, and 23, and the meander corner on the west side of Graves Lake, common to Sections 14 and 23, 10.000m westerly from the proportioned west meander corner position with a 2.134m long, 0.019m diameter aluminum rod with a 0.083m diameter stamped aluminum cap, up 0.280m, from which the following references were established:

0.457m Cedar	0.203m Birch	0.508m Spruce	Steel Signpost
S58°W	N15°E	S48°E	West
17.774m to 20d nail	2.684m to 20d nail	12.006m to 20d nail	0.170m
in north face	in west face	in east face	sign 54-9
up 0.340m	up 0.380m	up 0.510m	

The Bearing Trees were not blazed or scribed; the point is on private property.

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #2, p.78.

Coordinates:

Cass County North

Northing = 84,183.48 meters
Easting = 173,250.04 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 334,177.92 meters
Easting = 823,378.90 meters

Latitude = 47°08'23.15359" North
Longitude = 93°56'31.20159" West