


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Meander Corner on the west shore of Knights Lake, common to Sections 13 and 24, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota. In June, 1997, Northern Lights Surveying and Mapping, Inc. set a brass capped galvanized steel pipe on line between the northwest and northeast corners of Section 24 and at record General Land Office (G.L.O.) distance from the northwest corner of Section 24.

SKETCH OF REFERENCE TIES & EVIDENCE


T.142N., R.26W.



NOT TO SCALE
 Bearings are Grid
 North, Minnesota
 Central Zone, measured
 with a hand compass
 adjusted to 3'
 East declination.

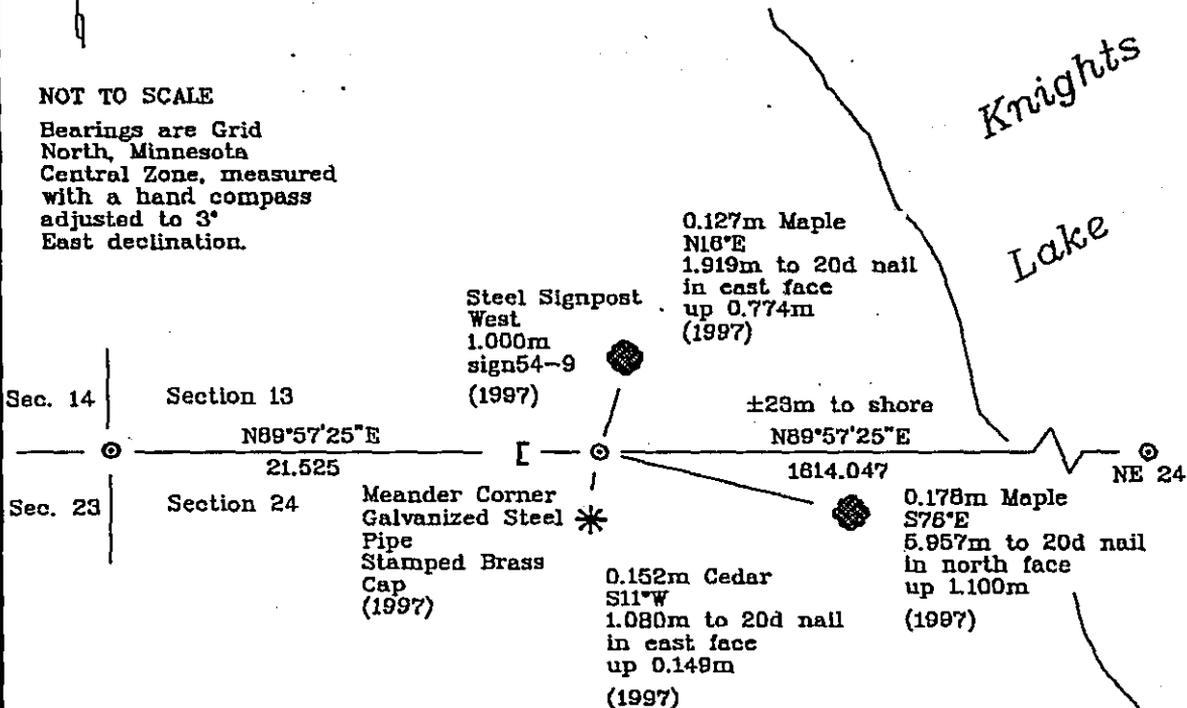

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.



395064

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 11-16-97
 LaVerne Leuelling Date

Registered Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 3:40 P.M. Date: Dec. 8, 1997

Recorder Claudine Taylor

By K.S. Deputy

DOCUMENT NO. 395064

Statement of Evidence

Meander Corner on the west shore of Knights Lake, common to Sections 13 and 24, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1872; General Land Office (G.L.O.) survey notes; Deputy Surveyor E.W. Griffin set a wooden post for the meander corner and referenced it with the following:

10" Norway Pine (0.254m)

N43°W

11 Links (2.213m)

The corner was set 1.07 chains from the southwest corner of Section 13.

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

June, 1997; Northern Lights Surveying and Mapping, Inc. crew of Berg and Gerving search, then set 1.219m long, 0.015m diameter galvanized steel pipe with a 0.083m diameter stamped brass cap for the meander corner at the 'lost' position on line between the northwest and northeast corners of Section 24 and at record G.L.O. distance from the northwest corner of Section 24.

0.127m Maple N16°E	0.152m Cedar S11°W	0.178m Maple S76°E	Steel Signpost West
1.919m to 20d nail in east face up 0.774m	1.080m to 20d nail in east face up 0.149m	5.957m to 20d nail in north face up 1.100m	1.000m sign54-9

Northern Lights Surveying and Mapping, Inc. Slaton Township Field Book #3, p. 51.

Coordinates

Cass County North

Northing = 64,298.012 meters
Easting = 174,603.207 meters

State Plane Coordinates
Minnesota Central Zone
NAD 83

Northing = 334,290.974 meters
Easting = 824,731.958 meters

Latitude = 47°06'26.63920" North
Longitude = 93°55'27.00815" West