

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 32, Township 138 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1-15-98 found a 1/2" IRON ROD (DOWN 0.5') IN CENTER LINE N-S-W ROAD  
DATE AND 5' SOUTH OF CENTER LINE ROAD EAST.
- left monument as found,  lowered monument,  removed monument (explain)
- On                      Placed a                       
DATE

### SKETCH OF REFERENCE TIES

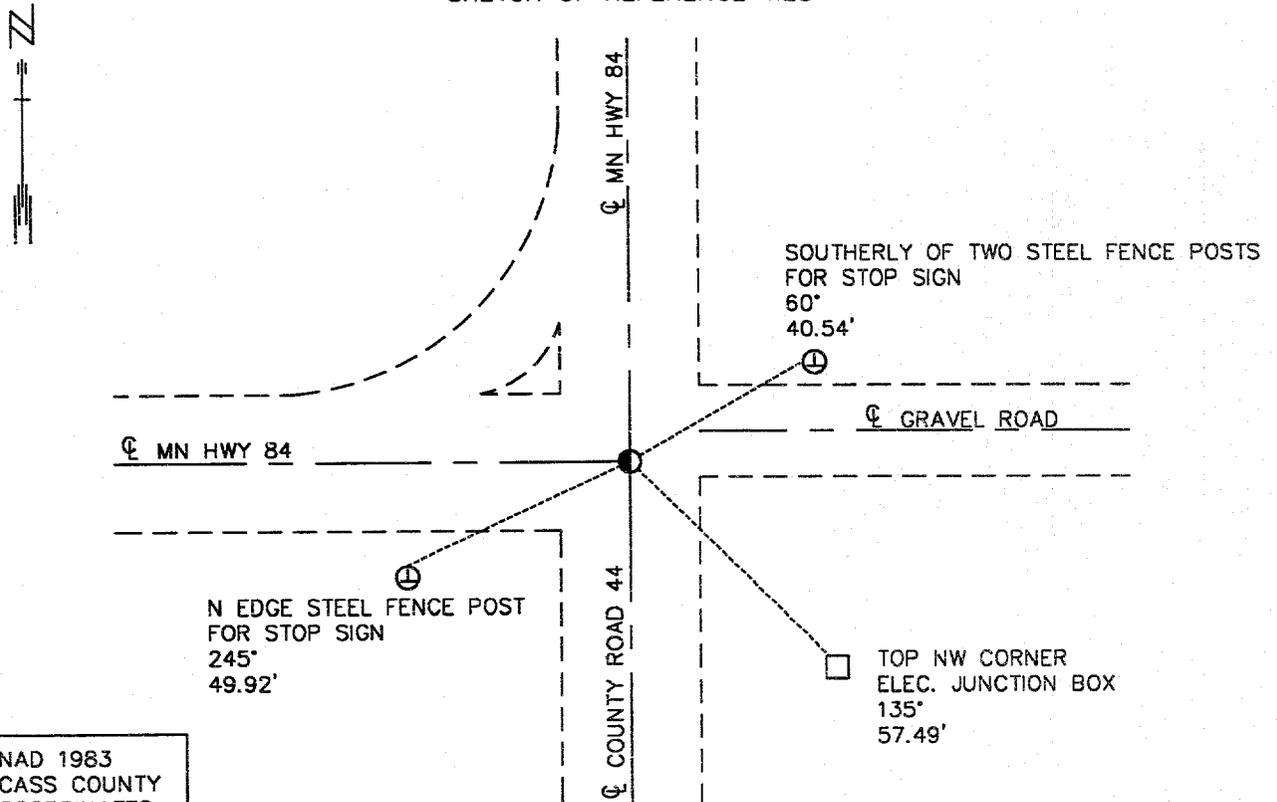

NAD 1983  
CASS COUNTY  
COORDINATES

N 310348.51  
E 525327.11

NOT TO SCALE  
AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

3-19-98  
FOM01863

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 4/30/98  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:15 P.M. on the 14th day of January A.D., 1999

County Recorder Claudine Kaylor  
By R.J., Deputy

DOCUMENT NO. 408862

**Northeast Corner Section 32, Township 138 North, Range 29 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1865 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

N Pine 15" N 36° E 64 links (42.24')  
N Pine 16" N 51° W 128 links (84.48')  
N Pine 16" S 81 1/2° W 180 links (118.80')  
N Pine 12" S 73° E 25 links (16.50')

1920? County Highway Department shows a 2" iron pipe at the corner. 3" concrete and steel monuments were north and west of the corner at 60 feet. This is recorded on the county land record card.

1998 The DNR survey crew found a 1/2" iron rod down 0.5' in centerline of paved roads north, south, west and 5 feet south of centerline gravel road east. The position of the monument was located with GPS equipment.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425.