

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 33, Township 138 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1-15-98 found a 1 1/4" INSIDE DIAMETER IRON PIPE WITH THREADED CAP (FLUSH)
DATE IN CENTER LINE OF E-W ROAD AND LEANING TO THE WEST.
- left monument as found, lowered monument, removed monument (explain)
- On 1-15-98 Placed a RESET THE IRON PIPE TO PLUMB POSITION.
DATE

SKETCH OF REFERENCE TIES

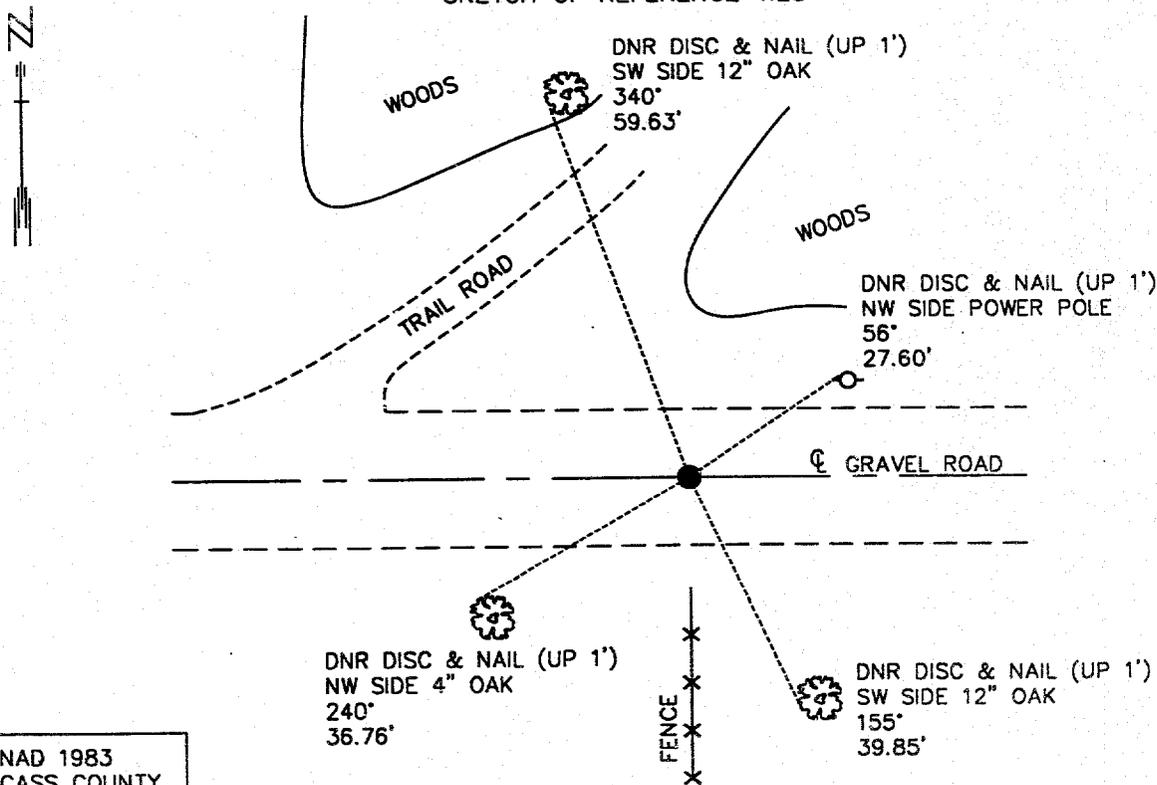

NAD 1983
CASS COUNTY
COORDINATES
N 310319.22
E 527993.66

NOT TO SCALE
AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

3-19-98
FOM01863

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 4/30/98
SIGNATURE DATE

License Number 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:20 P.M. on the 14th day of January A.D., 1999

County Recorder Claudine Kaylor
By K.F., Deputy

DOCUMENT NO. 408863

North Quarter Corner Section 33, Township 138 North, Range 29 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1865 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

N Pine 15" S 75° E 35 links (23.10')
Bl. Pine 4" N 77° E 145 links (95.70')

1998 The DNR survey crew found a 1 1/4" inside diameter iron pipe with a threaded cap flush in centerline of an east-west gravel road and in line with an old fence south. The position of the monument was located with GPS equipment. The distance to the section corner east is 2667.07 feet and the distance to the section corner west is 2666.72 feet.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425.