


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 19, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

On August, 17, 1998, Northern Lights Surveying and Mapping, Inc. found, accepted, and maintained the 1970 United States Department of Agriculture - Forest Service (U.S.D.A. - F.S.) perpetuation of the original General Land Office (G.L.O.) section corner.

SKETCH OF REFERENCE TIES & EVIDENCE T.143N., R.27W.

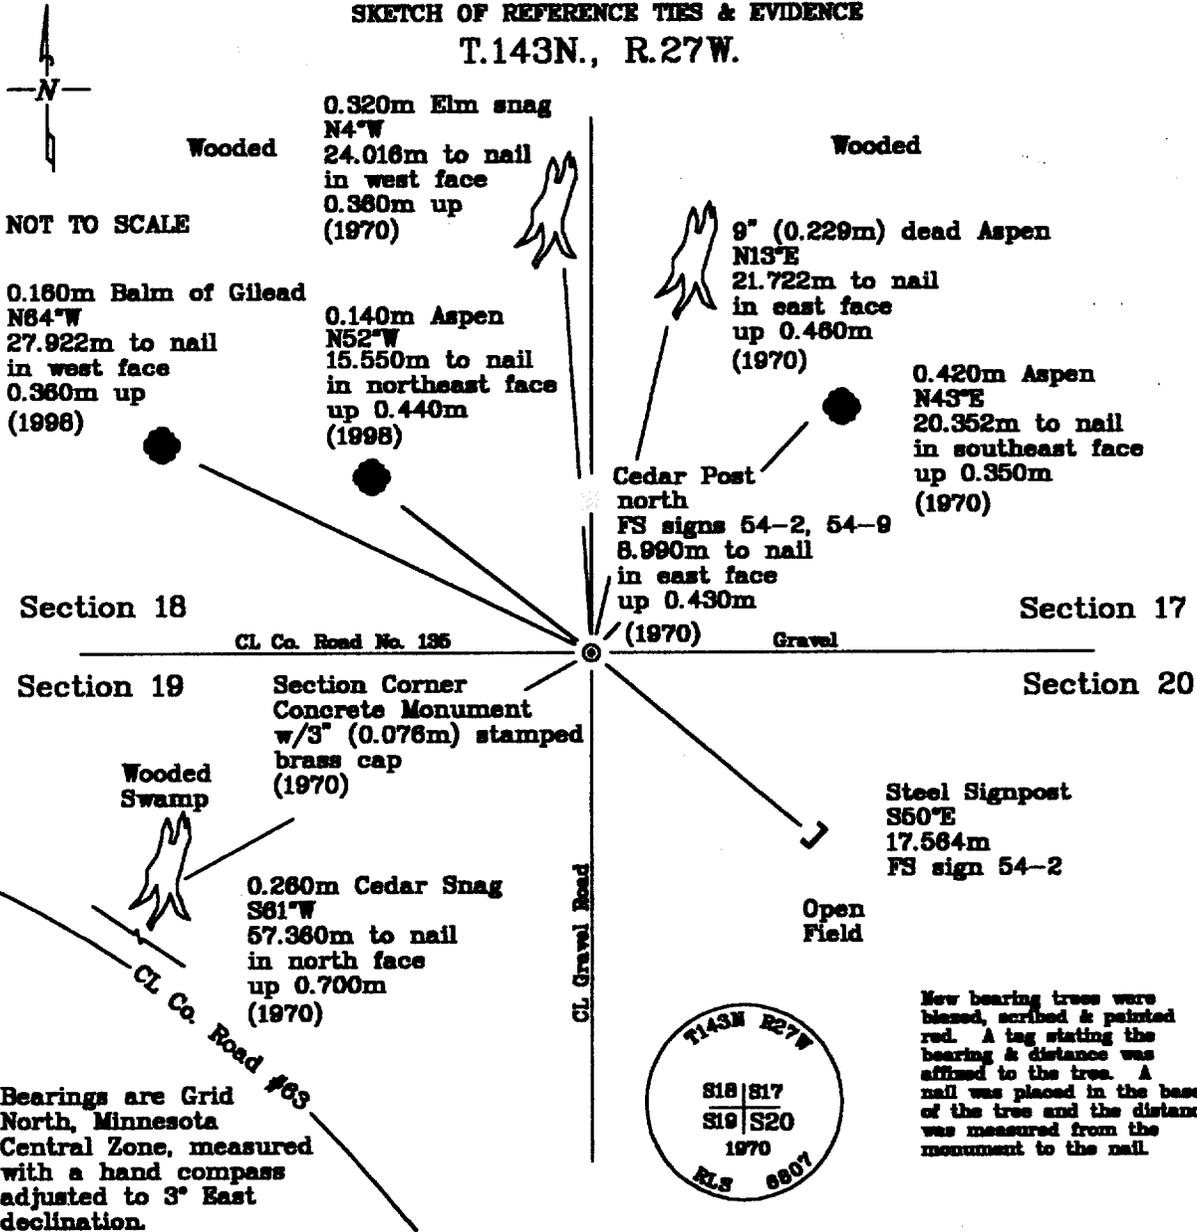

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Joseph Foster 4-28-99
Joseph Foster Date

Licensed Land Surveyor No. 25342
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412417
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:35 A.M. Date: 5-5-99
Recorder Claudine Kayler
By K.F. Deputy
DOCUMENT NO. 412417

Statement of Evidence

Page 2 of 3

Northeast Corner, Section 19, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the section corner and referenced it with the following:

6" (0.152m) Cedar N54°E	12" Spruce (0.305m) N52°W	14" (0.356m) Spruce S36°W	5" (0.127m) White Pine S36°E
20 Links (4.023m)	18 Links (3.219m)	20 Links (4.023m)	11 Links (2.213m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1912; Cass County Survey Record Book "B", Survey Record #280, p. 97; during a survey of State Rural Highway 45, George Ralph found an old post, but no references. He set the following:

3" (0.076m) Poplar S25°W	4" (0.102m) Poplar S70°30'E	4" (0.102m) Poplar N1°E	4" (0.102m) Poplar N82°E
84.4 Feet (25.725m) to nail	114.2 Feet (34.808m) to nail	76.6 Feet (23.348m) to nail	115 Feet (35.052m) to nail

1925; Cass County Book 154, p. 14; notes indicate that during a road alignment survey of Highway 135, the crew found an iron pipe and noted the following:

Telephone Pole Southwest	Telephone Pole Southwest
45.8 Feet (13.960m)	51.0 Feet (15.548m)

October, 1970; U.S.D.A.-F.S. Field Book #2, p. 3; Curtis Krause perpetuated the section corner by setting a 5.5"x5.5"x24" (0.140m x 0.140m x 0.610m) concrete monument 6" (0.152m) below the surface of County Highway #135, capped with a 3" (0.076m) diameter brass tablet. A 2" (0.051m) iron pipe was placed along the east side of the monument. The following references were established:

10" (0.254m) Cedar S61°W	13" (0.332m) Elm N4°W	6" (0.152m) Aspen N13°E	11" (0.279m) Aspen N43°E
188.2 Feet (51.363m) Scribed S18BT	79.1 Feet (24.220m) Scribed S18BT	71.5 Feet (21.79m) Scribed S17BT	66.9 Feet (20.391m) Scribed S17BT

Cedar Post
4"x4"x72"
(0.102mx0.102mx1.829m)
North
29.9 Feet (9.114m)
FS signs 54.2, 54.4

These notes and drawing indicate that Krause set the concrete monument at the position of a found 2" (0.051m) iron pipe and ties for a newly constructed road.

No bearing tree was placed in Section 20, as this was an open field.

August, 1997; U.S.D.A.-F.S. Field Book #2, p. 3; Curt Krause and Rob Main reset the 1970 monument approximately 10" (0.254m) below the surface of County Highway #135. They removed the 2" (0.051m) iron pipe because it was rising from the effects of frost, as was their own monument. A magnet was placed below the monument 3.5 feet (1.067m) below the road surface. The crew noted that the 1970 Elm was now a snag, as was the 1970 6" (0.152m) Aspen. The Cedar was dead. The crew witnessed the following references:

17" (0.432m) Aspen N43°E	Steel Signpost S45°W
66.9 Feet (20.391m)	57.60 Feet (17.557m)

Statement of Evidence

Page 3 of 3

Northeast Corner, Section 19, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

August 17, 1998; Northern Lights Surveying and Mapping, Inc. survey crew of Brunner, Foster and Gerving found the 1970 U.S.D.A.-F.S. monument and the following 1970 references were observed:

9" (0.229m) dead Aspen N13°E 21.722m to nail in east face up 0.460m	0.420m Aspen N43°E 20.352m to nail in southeast face up 0.350m	0.260m Cedar Snag S61°W 57.360m to nail in north face up 0.700m	Steel Signpost S50°E 17.564m FS sign 54-2
Cedar Post north FS signs 54-2, 54-9 8.990m to nail in east face up 0.430m	0.320m Elm snag N4°W 24.016m to nail in west face 0.360m up		

The crew maintained the corner and established the following references:

0.160m Balm of Gilead N64°W 27.922m to nail in west face 0.360m up	0.140m Aspen N52°W 15.550m to nail in northeast face up 0.440m
--	--

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #2, pp. 10-12.

Coordinates:

Cass County North

Northing =74164.385 meters
Easting =158502.611 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing =344152.666 meters
Easting =808628.119 meters

Latitude =47°11'47".41733 North
Longitude =94°08'10".10960 West