

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 30, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.


September, 1998; Northern Lights Surveying and Mapping, Inc. buried a brass capped pipe at the position indicated by the 1986 Curio Corner Certificate since the corner was removed by a new culvert. The remains of a post tip and wood fiber were found in the bottom of the 0.914m hole.

SKETCH OF REFERENCE TIES & EVIDENCE


T.143N., R.27W.

Section 30

Section 29



NOT TO SCALE

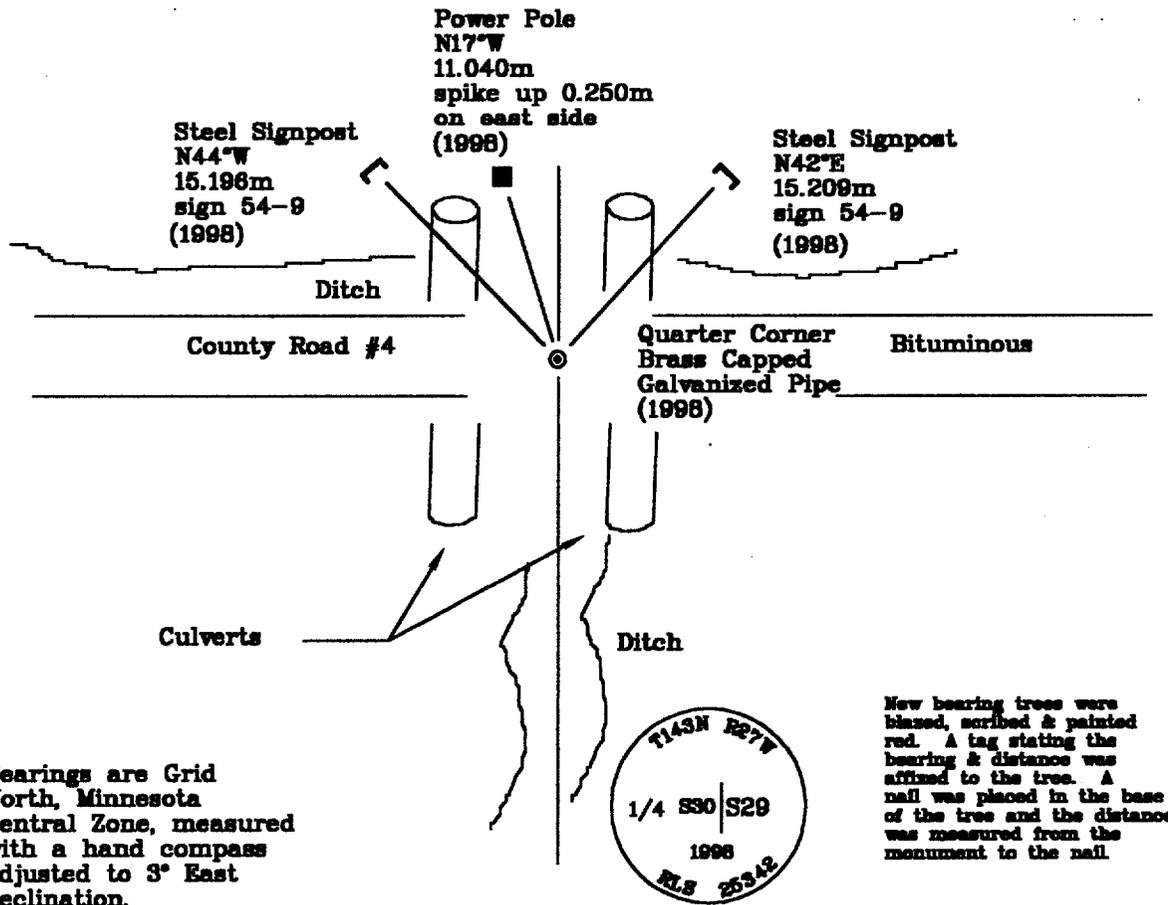

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Joseph Foster 4-28-99
Joseph Foster Date
Licensed Land Surveyor No. 25342
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412419
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:45 A.M. Date: 5-5-99
Recorder Claudine Kaylor
By K.F. Deputy
DOCUMENT NO. 412419

Statement of Evidence

Page 2 of 3

East Quarter Corner, Section 30, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

6" (0.152m) Tamarack	8" (0.203m) Tamarack
N64°E	S80°W
20 Links (4.024m)	15 Links (3.018m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1903; in a survey for the Leech Lake Reservoir, the Corps of Engineers looked for this corner on April 14, and found no trace of it or its accessories. Book 358, p. 37.

1907-1920; the Soo Line Railroad Map shows this corner in place and being 716.5 feet (218.39m) south of track station 364+25. It is also 2649.0 feet (807.42m) south of the northeast corner of Section 30.

August, 1919; E.B. Horst of Cass County laid out Route 4 along the east-west quarter line of Section 30. The notes call specifically for the west quarter of Section 30 and shows a distance of 5198.9 feet (1584.630m) to an unidentified map blip at the east quarter of Section 30. Cass County Survey Record Book "C".

1928; Testimony taken by GLO surveyors stated that this corner and its bearing trees were found in 1919 and were destroyed by subsequent road building.

1928; G.L.O. survey notes; during a dependent resurvey, testimony by local residents established the quarter corner at the intersection of the centerline of a ditch and a road. The G.L.O. set a witness corner on the north bank of a ditch on the north side of a road, alongside a 3"x6"x50" (0.076mx0.152mx1.270m) cedar post. The witness corner was a 1"x36" (0.025mx0.914m) iron pipe with a brass cap and was 29.7 feet (9.053m) north of the quarter corner. The crew set the following references:

275 Links (55.321m)	358 Links (72.018m)
12" (0.305m) Cedar	8" (0.203m) Birch
N27.5°E	N8 1/4°W

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1975; Cass County Highway Department notes on County Road #4 show the corner and the following references:

Steel Signpost	Steel Signpost	Steel Signpost
Southeast	South	Southwest
189.31 Feet (51.808m)	158.2 Feet (48.219m)	159.26 Feet (48.542m)

July, 1988; Certificate of Location of Government Corner No. 291487 on file with the Cass County Recorder's Office, Walker, Minnesota; by Walt Curo RLS 11395, during a survey of United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) boundaries, set a 2"x36" (0.061mx0.914m) iron pipe with a brass cap 29.7 feet (9.053m) south of the north bank of a ditch on the north side of a road in line with the centerline of an old ditch to the south and referenced it with:

Steel Signpost	Steel Signpost
S45°W	N45°E
50 Feet (15.240m)	50 Feet (15.240m)
sign 54-9	sign 54-9

Statement of Evidence

Page 3 of 3

East Quarter Corner, Section 30, Township 14S North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1998, Northern Lights Surveying and Mapping, Inc. crew of Leuelling and Brunner found the existing U.S.D.A.-F.S. ties and a slightly disheveled power pole B.T. tag had been burnt.

The monument had been disturbed during installation of two new culverts which lie immediately east and west of the corner position. The crew set a brass capped galvanized steel pipe 0.610m long; the cap is 0.280m below the bituminous road surface. A post tip and fragments were found 0.913m down and buried along with the pipe.

The following references were established:

Steel Signpost	Steel Signpost	Power Pole
N42°E	N44°W	N17°W
15.208m	15.196m	11.040m
sign 54-9	sign 54-9	spike up 0.250m
(1986)	(1986)	on east side

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, p. 37.

Coordinates:

Cass County North

Northing = 71726.224 meters
Easting = 158461.377 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 341714.583 meters
Easting = 808587.880 meters

Latitude = 47°10'28.47226" North
Longitude = 94°08'12.18686" West