


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 28, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 14, 1998; Northern Lights Surveying and Mapping, Inc., monumented the section corner with a galvanized steel pipe below the surface at the centerline of an old field access road. The corner was set utilizing John Curo's 1918 Cemetery Road survey. In that survey he had recovered the original government corner.

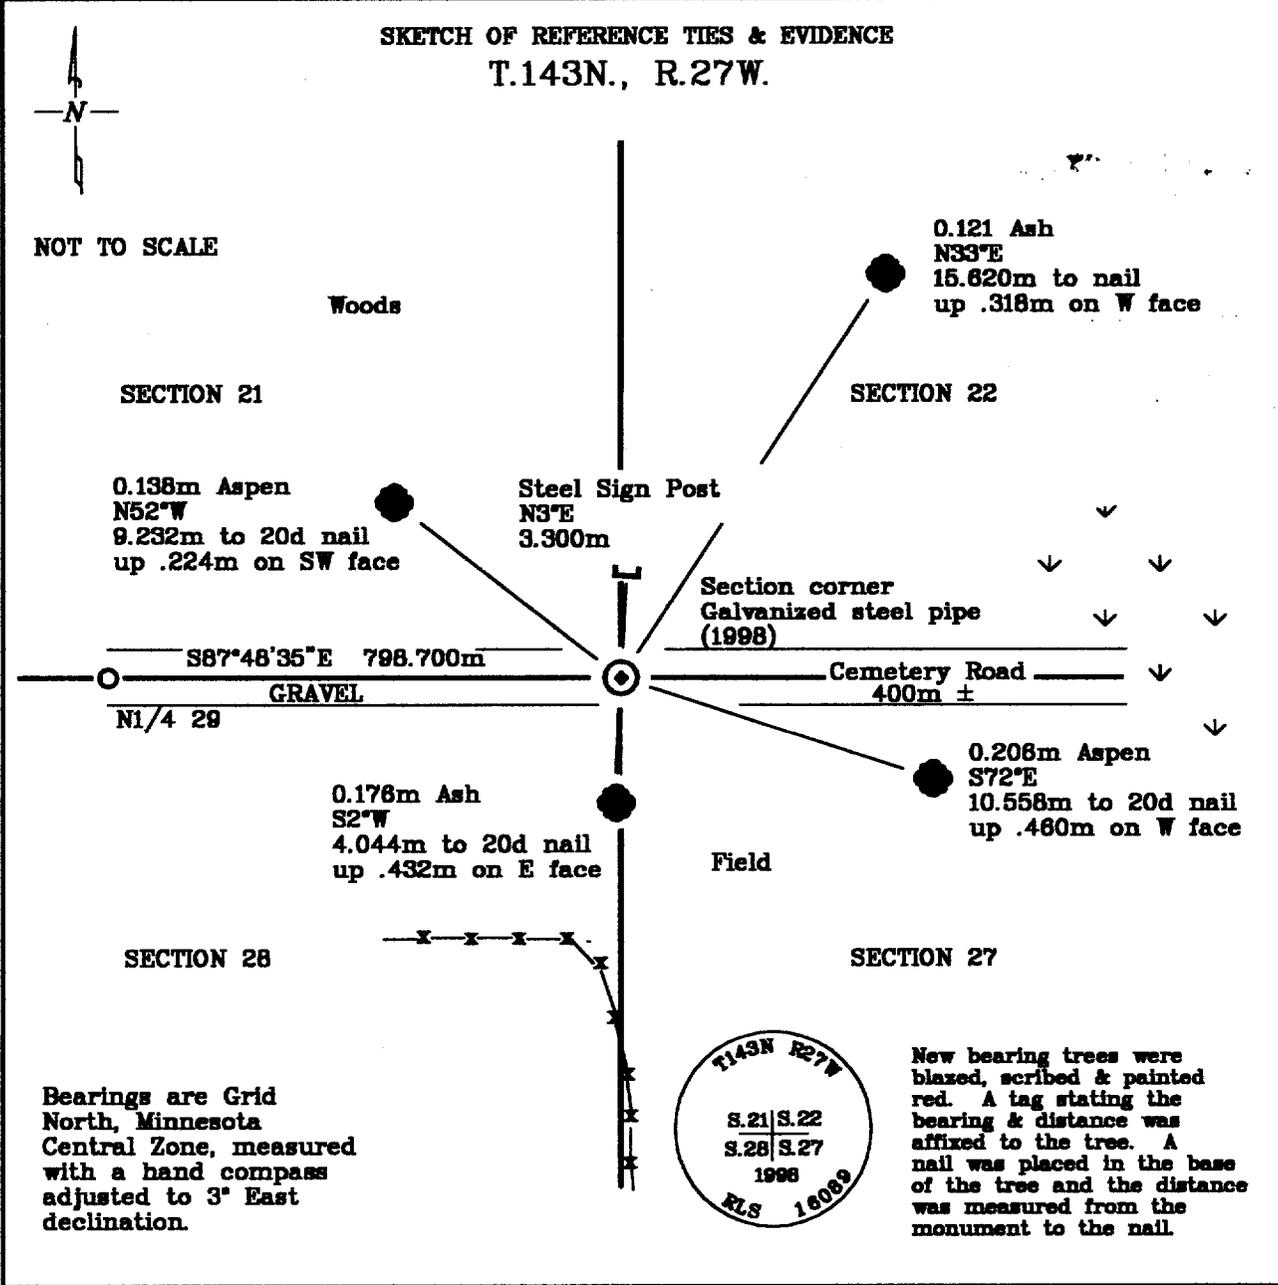

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Laverne Leuelling 5-13-99
Laverne Leuelling Date

Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412854
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:05 P.M. Date: May 17, 1999

Recorder Claudine Kaylor

By K.F., Deputy

DOCUMENT NO. 412854

Statement of Evidence

Northeast Corner, Section 28, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the section corner and referenced it with the following:

6" (0.152m) Spruce N8°W 25 Links (5.029m)	10" (0.254m) Spruce N86°E 34 Links (6.840m)	6" (0.152m) Cedar S25°E 35 Links (7.041m)	10" (0.254m) Spruce S55°W 28 Links (5.230m)
---	---	---	---

The corner fell in a swamp. The south edge was 4.50 chains (297 feet) south; the east edge was 14 chains (924 feet) east of the corner; the west edge was 3.8 chains (250 feet) west of the corner; and the north edge was 15 chains (990 feet) north of the corner.

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

June 1916: John Curo RLS #1428 laid out the centerline of the Cemetery Road. He began his survey at the N1/4 of section 29 and traversed east along the centerline to the northeast corner of section 28. At this location he located a 7" tamarack bearing tree which lay southwest of the corner. He measured the distance from the found section corner to the initial N1/4 as 2620.4 feet. Curo Field Book# 152.

1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Field Book #1, p.39; Curt Krause chained to the area from the section corner to the west and searched, but found no post or bearing trees. An old telephone line ran north/south, and the poles had been cut off, but the clearing remained.

September 23, 1998; Northern Lights Surveying and Mapping, Inc., crew of Gerving and Brunner ran GPS for control purposes.

November 30, 1998; NLSM's crew of Leuelling and Heinle returned to area where GPS was done and searched for BT's. The crew also checked the field lines and measured to try and find swamp calls. There was an old field to the south of the approximate Curo position. The distances to the 4 swamp calls fit the record calls within .5 chain.

December 14, 1998; NLSM crew of Heinle and Carlson again visited site to set monument. The position was determined by Curo's record distance from the west and the centerline of the road. The crew set a brass capped 0.015m diameter galvanized steel pipe, 0.610m long, and .120m below the surface for the monument, and established the following references:

0.178m Ash S2°W 4.044m to 20d nail up .432m on E face	0.206m Aspen S72°E 10.558m to 20d nail up .460m on W face	0.138m Aspen N52°W 9.232m to 20d nail up .224m on SW face
0.121 Ash N33°E 15.620m to nail up .318m on W face	Steel Sign Post N3°E 3.300m	

In the absence of any contrary evidence, the monument was set in the centerline of Cemetery Road which John Curo laid upon the section line and at Curo's record distance to the N1/4 of section 29.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, p. 4.

Coordinates:

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Cass County North

Northing = 72487.641 meters
Easting = 161716.048 meters

Northing = 342457.293 meters
Easting = 811842.148 meters

Latitude = 47°10'52.34233" North
Longitude = 94°06'37.58213" West