


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner, Section 25, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

On December 4, 1998, Northern Lights Surveying and Mapping, Inc. set a 1.220m Brass Capped Galvanized Steel Pipe for the 1/4 corner. The pipe was set .250m above the ground. The corner was set at a position calculated from the Cass County traverse in 1915. At that time they had located the original government bearing trees.

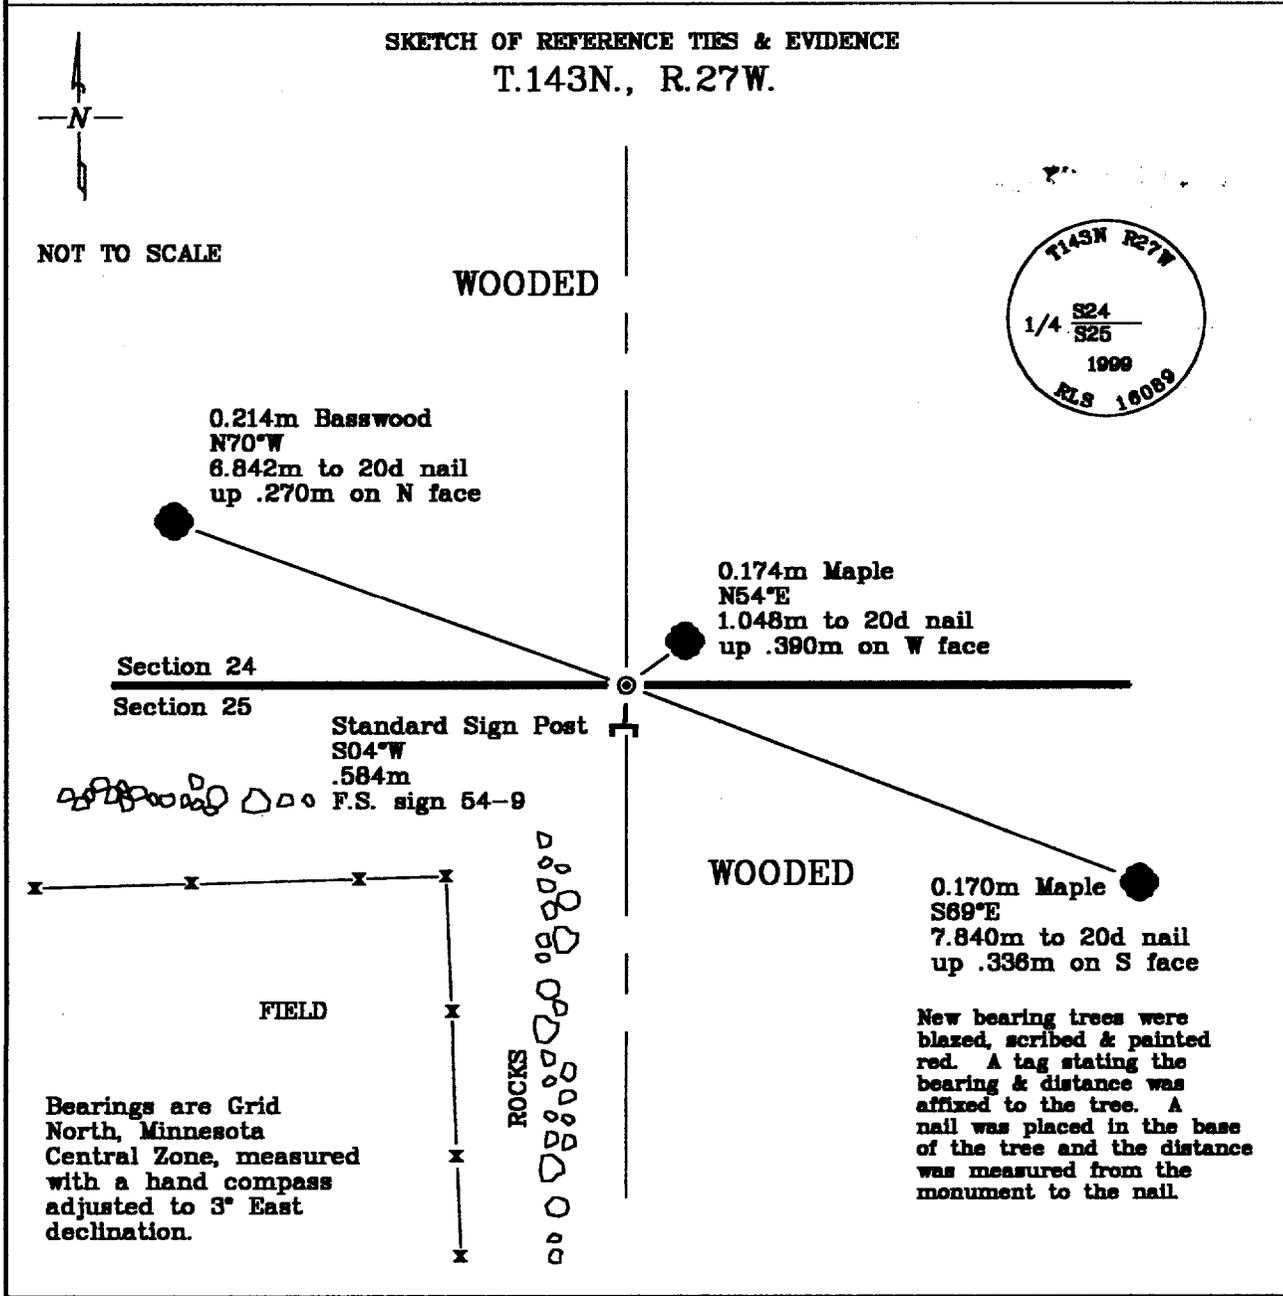

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Verne Levelling 5-13-99
 Verne Levelling Date
 Licensed Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412855
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:10 P.M. Date: May 17, 1999
 Recorder Claudine Kaylor
 By K.F., Deputy
 DOCUMENT NO. 412855

Statement of Evidence

Page 2 of 3

North Quarter Corner, Section 25, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

16" (0.408m) Fir	15" (0.381m) Maple
S55°W	N28°W
16 Links (3.219m)	37 Links (7.443m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

February, 1915; Cass County Record Book "B" - Survey Record #238, pp. 455-482; F.A. Donner found the maple standing, plainly marked and a fir stump. He set a new stake and noted the old references:

15" (0.318m) Maple	16" (0.408m) Fir Stump
N18°W	S85°W
24.42 Feet (7.443m)	10.56 Feet (3.219m)

He marked the following new references:

12" (0.305m) White Pine	14" (0.356m) Birch
S38°W	S59°E
54.10 Feet (16.490m)	34.30 Feet (10.455m)

1915: Plat from the road survey shows a distance of 2785.1' from SW of 25 to the south quarter of 25 then north through section 25 5382.68' to the north quarter of section 25. It then shows 5328.72 on to the N1/4 of Section 24.

1939: USDA-Forest Service aerial photography indicates that a field had been established that approximated the NW1/4 of section 25. There was, however, no evidence that a road had been built along the north-south quarter lines as had been planned in 1915. The connecting road between Rt. 4 & Co. Rd. #135 ran along or near the west lines of sections 24 & 25 instead.

November 4, 1969; U.S.D.A. Forest Service Technician, Curt Krause, searched the area and found it to have been burned, no evidence was found.
USDA-FS T143N-R27W Book #1,p.8.

August 26, 1998; Northern Lights Surveying and Mapping, Inc., crew of Leuelling, Gerving, and Carlson established initial control. Initial search recovered no conclusive, G.L.O. or subsequent, evidence.

December 3, 1998; Northern Lights crew of Foster and Heinle returned to the control established by Leuelling and searched a north quarter position calculated from Cass County 1915 Road Survey of record; N61°19'52"E 19.744m from GPS control point. Finding no evidence of G.L.O. or subsequent surveys, the crew searched the surrounding area and found no conclusive evidence of the quarter corner or it's accessories. The corner position fell N68°E 17.5m from a fairly new fence corner. It fell northwesterly 5± meters from the corner of the remains of an older rock line and down fence wire.

December 4, 1998; NISM crew of Heinle and Brunner set a 0.015m diameter galvanized steel pipe, 1.220m long, up .250m above ground for the quarter corner. The following references were established:

0.174m Maple	0.170m Maple	0.214m Basswood	Standard Sign Post
N54°E	S69°E	N70°W	S04°W
1.048m to 20d nail	7.840m to 20d nail	6.842m to 20d nail	.584m
up .390m on W face	up .336m on S face	up .270m on N face	F.S. sign 54-9

The distance to the N1/4 of Section 24 was 1624.688 meters (5330.33 feet) and was 1637.92 meters (5373.74 feet) to the S1/4 of Section 25. The corner was established at a best fit position of the 1915 location.

Statement of Evidence

Page 3 of 3

North Quarter Corner, Section 25, Township 143 North, Range 27 West, of the 5th Principal Meridian, Cass County, Minnesota.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, p. 24.

Coordinates:

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Cass County North

Northing = 72581.335 meters
Easting = 165816.107 meters

Northing = 342572.608 meters
Easting = 815942.037 meters

Latitude = 47°10'55.76910" North
Longitude = 94°02'22.85267" West