


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 27, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

January 12, 1999; Northern Lights Surveying and Mapping, Inc., (NLSM) monumented the Quarter corner position with a 0.015m diameter, 1.219m long galvanized steel pipe, .272m above the ground, with a brass cap. The corner was set from the remains of what is believed to be an original Government Bearing Tree.

SKETCH OF REFERENCE TIES & EVIDENCE

T.143N., R.27W.

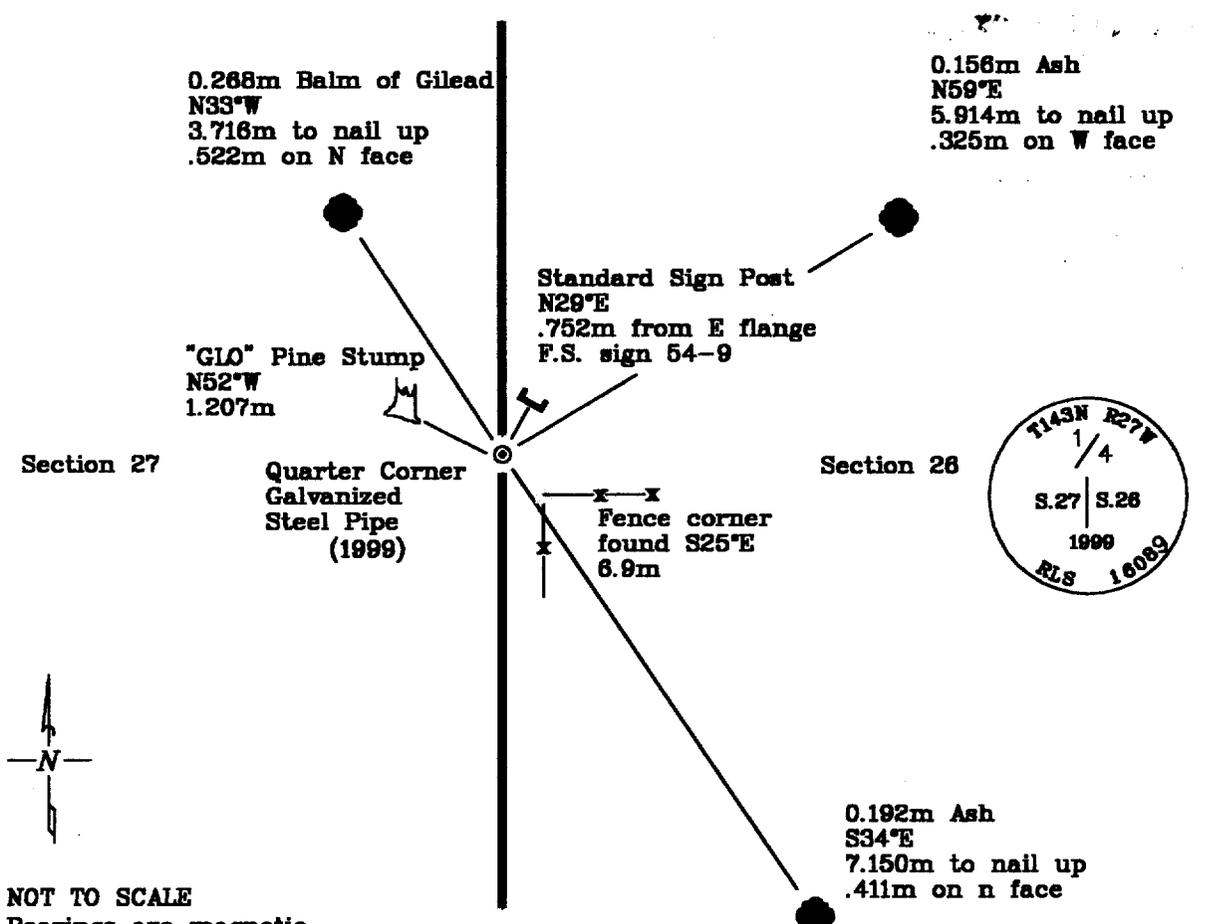

NOT TO SCALE
Bearings are magnetic

Bearings are Grid
North, Minnesota
Central Zone, measured
with a hand compass
adjusted to 3° East
declination.

New bearing trees were
blazed, scribed & painted
red. A tag stating the
bearing & distance was
affixed to the tree. A
nail was placed in the base
of the tree and the distance
was measured from the
monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

John Leuelling 5-13-99
Date
John Leuelling

Registered Land Surveyor No. 18089
NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER 412858
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:25 P.M. Date: May 17, 1999

Recorder Claudine Kaylor

By K.J. Deputy

DOCUMENT NO. 412858

East Quarter Corner, Section 27, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

7" (0.178m) Spruce	12" (0.305m) Birch
N52°W	N40°E
6 Links (1.125m)	9 Links (1.811m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

November, 1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Field Book #1, p. 22; Curt Krause put a location poster on a 5" (0.127m) Aspen 20 feet (6.096m) north of a fence corner. He found no evidence of the original corner or its references. The area had been burned severely, and no large trees were standing.

October 5, 1998; Northern Lights Survey and Mapping, Inc., used GPS to gain control, and then searched. At this time no conclusive evidence was found.

December 2, 1998; NLSM crew of Foster and Brunner returned to the previously GPS'd control to search again for the quarter corner. The search position was based on record quarter corner (from corner to the south toward an east-west proportioned northwest of section 26). The area had been heavily logged, farmed and burned, one pine stump was found as a possible BT. The position fell close to an existing fence.

January 12, 1999; Northern Lights Survey and Mapping, Inc., crew of Heinle and Carlson monumented the quarter corner position from the found pine stump which we believe to be the original GLO Bearing Tree as it fits with occupation and is compatible with GLO feature calls and is the only correct stump in the area. Monumentation was with a 0.015m diameter, 1.219m long galvanized steel pipe, .272m above the ground with a brass cap, and they established the following references:

0.192m Ash	0.156m Ash	0.268m Balm of Gilead
S34°E	N59°E	N33°W
7.150m to nail up	5.914m to nail up	3.716m to nail up
.411m on north face	.325m on west face	.522m on north face

Standard Sign Post
N29°E
.752m from east flange
F.S. sign 54-9

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, P. 45.

Coordinates:

Cass County North

Northing = 71642.488 meters
Easting = 163330.969 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 341632.810 meters
Easting = 813457.348 meters

Latitude = 47°10'25.53495" North
Longitude = 94°04'20.95950" West