



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner, Section 34, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 7, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) found and accepted a spike under the bituminous. A galvanized steel pipe was set for the quarter corner position. The monument now perpetuates the 1915 Cass County "lost" quarter corner.

**SKETCH OF REFERENCE TIES & EVIDENCE
T.143N., R.27W.**



NOT TO SCALE

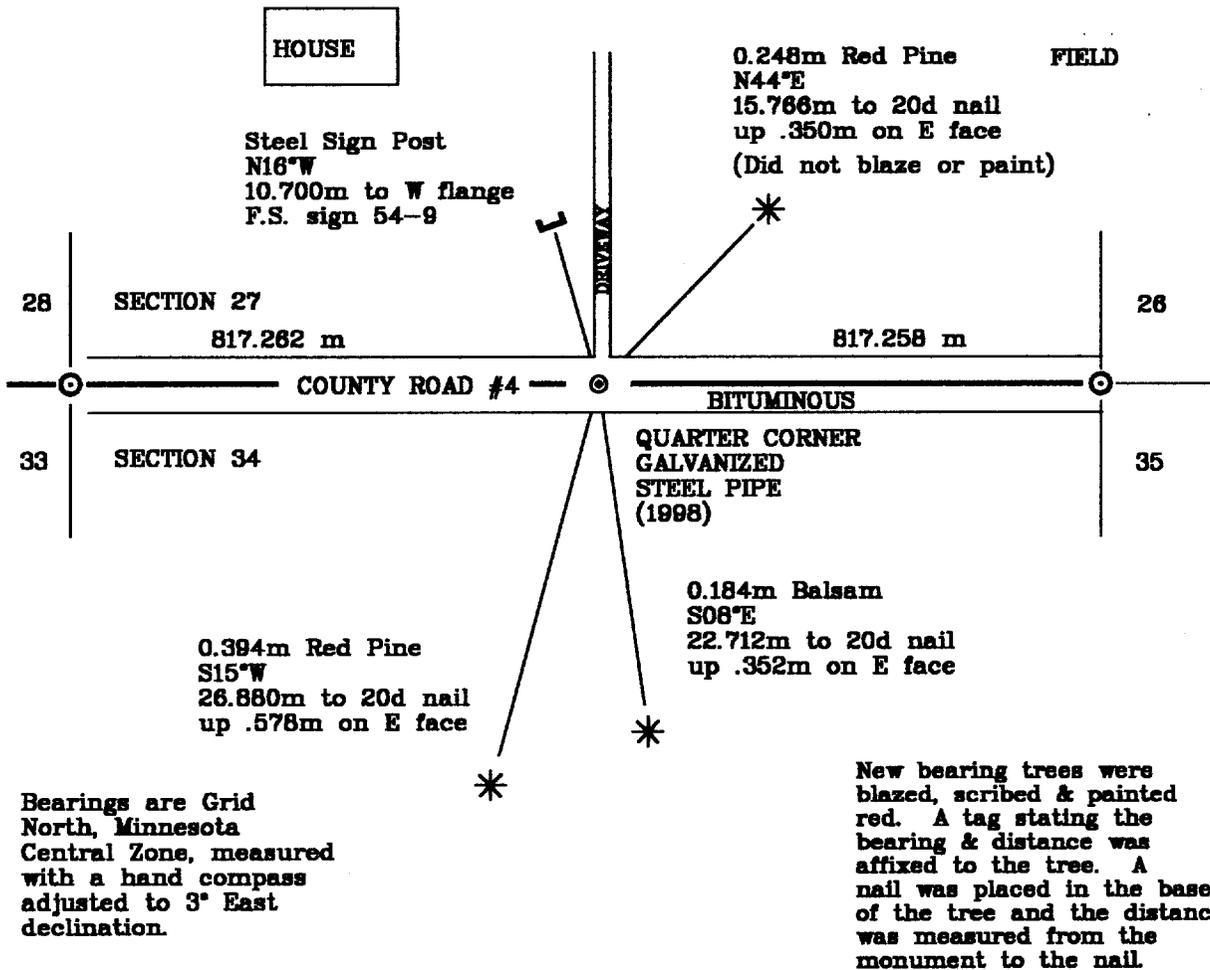

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuenig 5-13-99
LaVerne Leuenig Date

Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412862
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:45 P.M. Date: May 17, 1999

Recorder *Claudine Kaylor*

By K.F., Deputy

DOCUMENT NO. 412862

Statement of Evidence

North Quarter Corner, Section 34, Township 143 North, Range 27 West, of the 5th Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

10' (0.254m) Aspen	8" (0.152m) Tamarack
N41°W	S5°W
22 Links (4.426m)	13 Links (2.615m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

February, 1915; Cass County Record Book "B", Survey Record #328, pp.456-462; F.A. Donner set a "lost" quarter corner and referenced it with the following:

10" (0.254m) Tamarack Stump	12" (0.305m) White Pine Snag
S56°E	N38°E
61.8 Feet (18.837m)	97.3 Feet (29.657m)
in ditch	in driveway

The corner should have been 2679.90 feet from both the northwest & northeast corners of Section 34.

November, 1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N., R.27W. Field Book #1, p.37; William Okerman RLS 6807, searched the area of the corner for one hour. He noted that the corner could be placed on an old fence line to the north, and that the distance from the 1915 Cass County record checked very well.

November, 1998; Northern Lights Surveying and Mapping, Inc., crew and Cass county crew excavated a 3' x 9' area 2' deep to natural soil. A 60d spike, found at the top of the natural ground fit the calculated position, and was accepted as the corner.

December 7, 1998; NLSM crew returned to the corner position and set a 0.015m diameter galvanized steel pipe, 0.610m long, below the bituminous for the quarter corner and the following references were established:

0.248m Red Pine	0.184m Balsam	0.394m Red Pine
N44°E	S08°E	S15°W
15.766m to 20d nail	22.712m to 20d nail	26.880m to 20d nail
up .350m on E face	up .352m on E face	up .578m on E face
(Did not blaze or paint)	Standard Sign Post	
	N18°W	
	10.700m to W flange	
	F.S. sign 54-9	

The resultant corner was 817.062 meters from the northwest corner of section 34 and 817.258 meters from the northeast corner of section 34.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p.4.

Coordinates:

Cass County North

Northing = 70852.519 meters
Easting = 162513.175 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340,842.542 meters
Easting = 812,839.895 meters

Latitude = 47°10'00.00310" North
Longitude = 94°04'59.85623" West